

INTERCHANGE PRO

RUBBER & PVC WATER HOSE



RUBBER WATER HOSE

- ✓ 3/4" Solid brass fittings
- ✓ 20% Lighter than standard rubber hose
- ✓ Suitable for use with hot water up to 180°F
- ✓ 500 PSI minimum burst pressure
- ✓ Ozone Resistant / Abrasion Resistant / Kink Resistant
- ✓ Bend Restrictor for added protection
- ✓ 3:1 Safety Factor





Diameter	Length	Model	Manf
5/8"	50'	RBW5850	84782
	75'	RBW5875	84783
	100'	RBW58100	84784
3/4"	50'	RBW3450	84785
	100'	RBW34100	84786



Superior Fittings

Rubber Hose

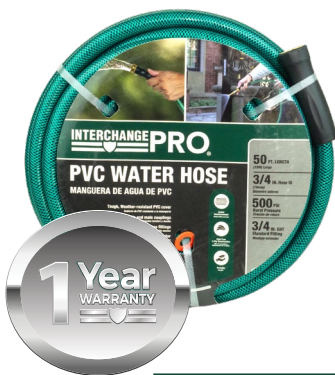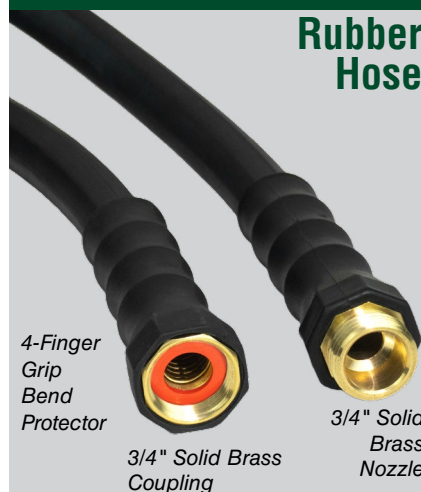

PVC WATER HOSE

- ✓ 3/4" Brass fittings
- ✓ Tough, weather-resistant PVC cover
- ✓ High-strength polyester-braided radial reinforcement
- ✓ 500 PSI minimum burst pressure
- ✓ Kink-free 3-ply construction
- ✓ 4-finger grip bend restrictor
- ✓ Lightweight and portable

Diameter	Length	Model	Manf
5/8"	50'	PVCW5850	84565
	75'	PVCW5875	84566
	100'	PVCW58100	84567
3/4"	50'	PVCW3450	84568
	100'	PVCW34100	84569



PVC Hose

Reinforced Bend Protectors

3/4" Brass Coupling

3/4" Brass Nozzle



www.Interchange-Pro.com

1-800-745-6735

INTERCHANGE PRO products are designed to high standards for professional use.



INTERCHANGE PRO

MANGUERA DE AGUA DE CAUCHO Y PVC

MANGUERA DE AGUA DE CAUCHO

- ✓ Conectores sólidos de latón de 3/4 pulg.
- ✓ 20 % más ligera que una manguera de caucho estándar
- ✓ Adecuada para usarse con agua caliente hasta 180°F
- ✓ Presión de ruptura mínima de 500 PSI
- ✓ Resistente al ozono / Resistente a la abrasión / Resistente a las torceduras
- ✓ Limitador de flexión
- ✓ Factor de seguridad 3:1



Diámetro	Longitud	Modelo	Parte
5/8"	50'	RBW5850	84782
	75'	RBW5875	84783
	100'	RBW58100	84784
3/4"	50'	RBW3450	84785
	100'	RBW34100	84786



Conectores Superiores

Manguera de caucho



Protector de doblez de agarre 4 dedos

Acoplador de latón sólido 3/4 pulg.

Boquilla de latón sólido 3/4 pulg.

MANGUERA PARA AGUA DE PVC

- ✓ Conectores sólidos de latón de 3/4 pulg.
- ✓ Cubierta de PVC sólida y resistente a los elementos
- ✓ Refuerzo radial trenzado de poliéster de alta resistencia
- ✓ Presión de ruptura mínima de 500 PSI
- ✓ Fabricación de 3 capas libre de torceduras
- ✓ Limitador de doblez de agarre de 4 dedos
- ✓ Ligero y portátil

Diámetro	Longitud	Modelo	Parte
5/8"	50'	PVCW5850	84565
	75'	PVCW5875	84566
	100'	PVCW58100	84567
3/4"	50'	PVCW3450	84568
	100'	PVCW34100	84569



Manguera de PVC



Protector de doblez reforzado

Acoplador de latón 3/4 pulg.

Boquilla de latón 3/4 pulg.



www.Interchange-Pro.com

1-800-745-6735

Los productos INTERCHANGE PRO® están diseñados con altos estándares para uso profesional.

