



Interchange PRO



Introduction



About Our Brand

Founded in 1982, *Interchange Brands, LLC* began by supplying replacement nails and staples, quickly becoming one of the nation's largest sources for interchangeable fasteners. At the time when replacement options were limited and fragmented - often imported from Europe - the company brought order to the market, providing dealers with compatible staples and later expanding to support tool manufactures lacking their own fastener programs.

In 2022, we began the journey of rebranding as **Interchange PRO**, marking a new chapter of growth and innovation. Our product line now spans a wide range of tools, accessories, fasteners, construction supplies and display/point of purchase solutions. Our team is expanding, strengthening customer support, and increasing engagement to better serve our customers. We also enhanced our digital presence, continually updating product information and resources on **www.Interchange-Pro.com** to keep you informed. We remain committed to providing the best service and solutions in the industry.

Interchange PRO is a trusted brand specializing in high-quality construction products and tools for professionals and DIY enthusiasts. Renowned for its durable fasteners, nails, screws, and accessories, Interchange PRO delivers innovative solutions for a variety of projects. With a focus on performance and reliability, our products ensure efficiency and lasting results.



Table of Contents

Fastener Refer	ence	
Nails & Corrosion 4 Finishes & Applications 4	Collated Nails	Collated Staples 7
Pneumatic Too	ls	S
Roofing Tools	Joist Hanger Tools 10 Framing Tools 10	Staplers
Accessories		13
Air Hose 14	Oils & Lubricants 15	Nail Gun Hangers 16
Fasteners		17
Collated Nails	1 & 5 lb Bulk Nails	Decking & Construction Screws
Construction S	upplies	61
Water Hose 62 Floor Protection 63	Roofing Underlayment 64 Masonry Stucco Tape 65	Tie Wire
Display & POP		67
2' Gondolas & Accessories 68	Poly Hose Display 69	Looking for our Tool Part Kits? See Page 70

2 INTERCHANGE PRO WWW.INTERCHANGE-PRO.COM 3

Fastener Reference

Collated Nails



Nails & Corrosion

Fastener performance in wood depends on the fastener's metal and coating, the wood's chemical makeup, and environmental conditions.

- Galvanizing protects steel from rust, but salt, humidity, and pollution can break it down over time.
- Certain woods, like redwood and cedar, contain tannins that react with zinc coatings, causing stains.
- Wood acidity, preservatives, and fire retardants can corrode some metals.

For harsh environments, aluminum or stainless steel fasteners are best. For unusual applications, seek advice from lumber dealers, building associations, manufacturers, or engineers.

Finishes & Applications

INTERIOR - Limited corrosion protection - Suggested for interior applications only. Do not use in treated lumber or where rust and corrosion is a concern.

Bright: Uncoated steel finish. Not for use in treated lumber.

Vinyl Coated: Provides ease of nail driving and improved holding power.

EXTERIOR - Higher corrosion resistance - Suggested for exterior use.

Electro-Galvanized: Limited corrosion protection. Applied to steel through an electrical charge. Meets ASTM A-641 standards.

Hot Galvanized: The coating on hot galvanized nails could be hot dipped zinc, hot dipped wire zinc or thermal diffused zinc. All hot galvanized

nails comply with ASTM A153 standards.

Stainless Steel: Provides the best corrosion resistance for use in cedar, redwood and treated lumber.

Aluminum: Provides the best corrosion resistance for specialty exterior applications such as gutters and trimming. Do not use with treated lumber.



Coating Guide

Bright Ideal for indoor projects. Excellent holding power & a clean finish for framing, carpentry and woodworking.

Electro Galvanized Ideal for indoor use. Ensuring strength & protection with its added corrosion resistance coating.


Electro Galvanized Ideal for light outdoor use. Ensuring strength & protection with its added corrosion resistance coating.

Hot Galvanized Ideal for outdoor & highmoisture environments. Durable & rust -resistant. ACQ Approved.

Stainless Steel Provides the best corrosion resistance. For use in cedar, redwood and treated lumber.


Aluminum Provides the best corrosion resistance for specialty exterior applications such as gutters and trimming. Do not use with treated lumber




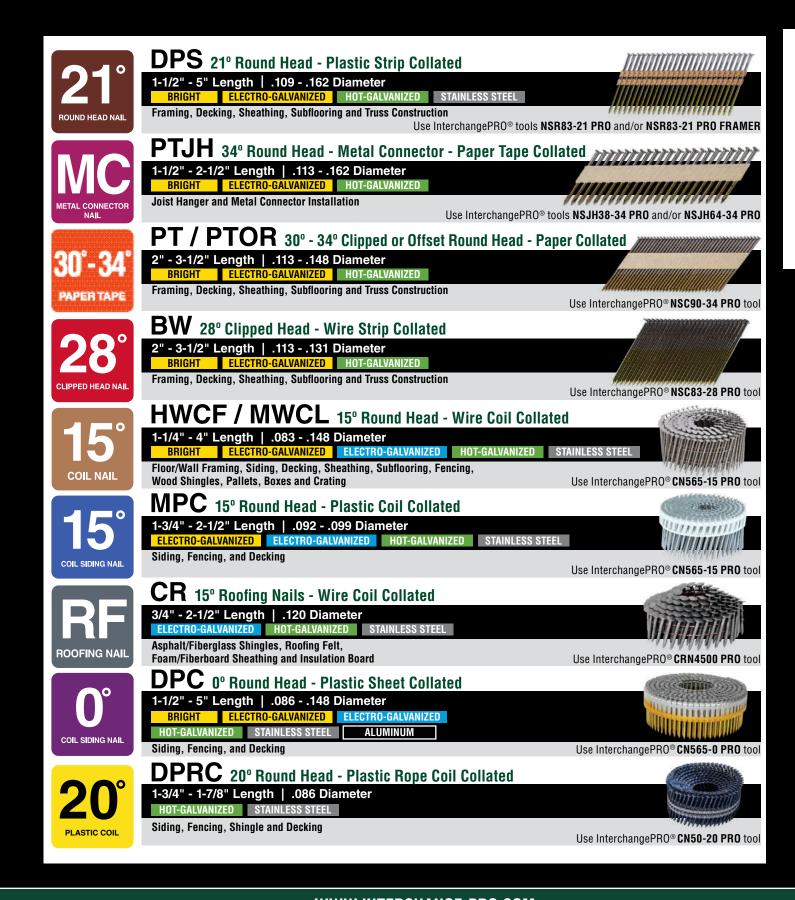

Collated Finish Nails and Brads

Collated Staples

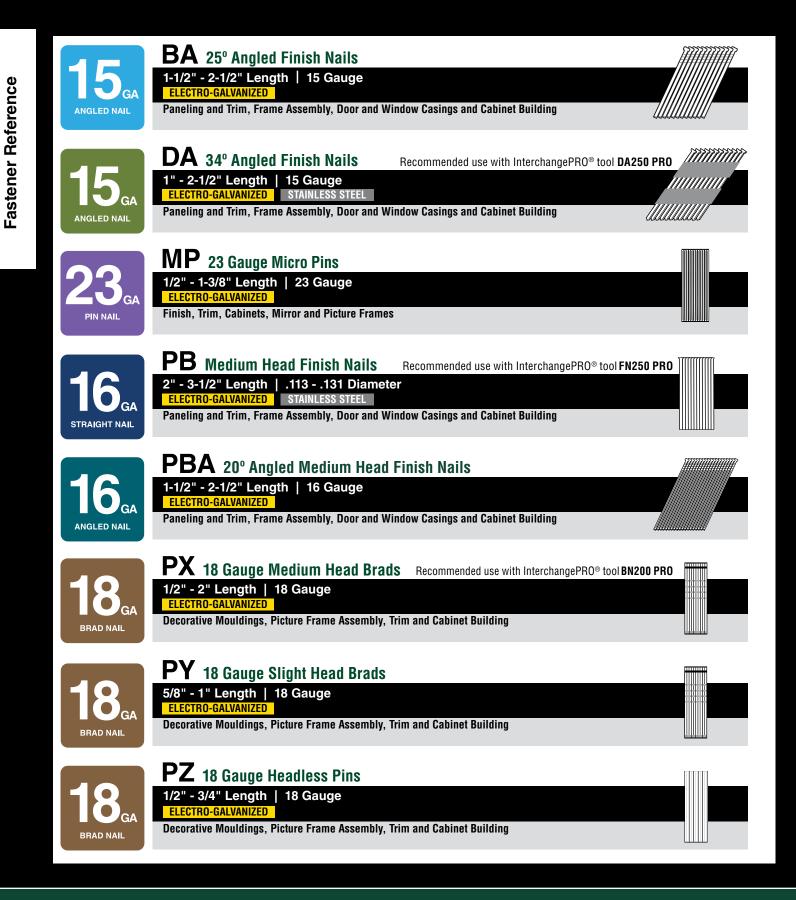

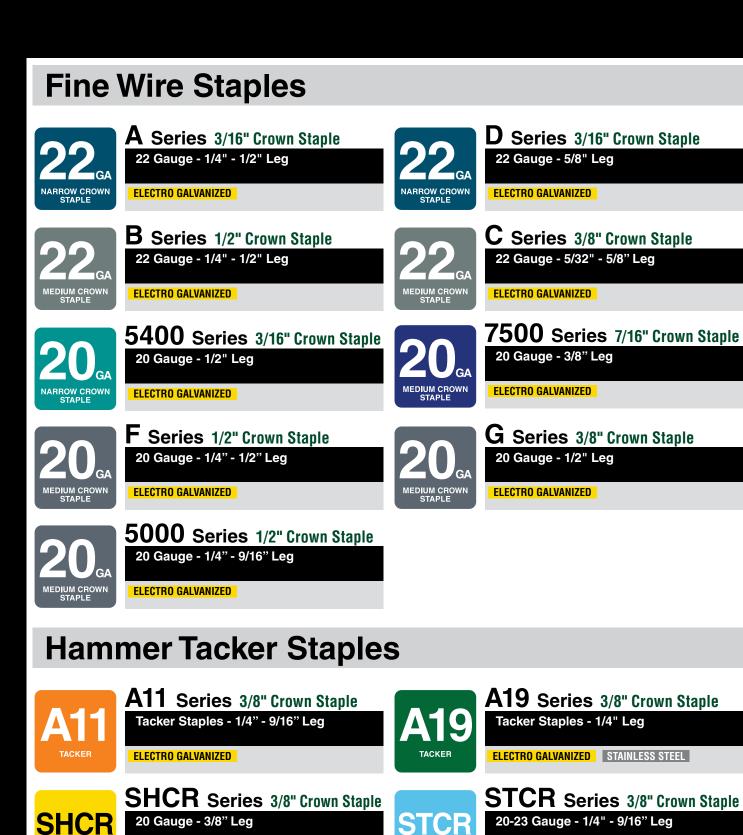

ELECTRO GALVANIZED

6 www.Interchange Pro 7

ELECTRO GALVANIZED

INTERCHANGE

Medium Wire Staples



L Series 1/4" Crown Staple

18 Gauge - 3/8" - 1-1/2" Leg

Use InterchangePRO® SL150 PRO too

ELECTRO GALVANIZED

GSN Series 3/16" Crown Staple 18 Gauge - 5/8" - 1-1/2" Leg

ELECTRO GALVANIZED

J Series 7/16" Crown Staple 18 Gauge - 3/8" - 5/8" Leg

ELECTRO GALVANIZED

SX Series 7/32" Crown Staple 18 Gauge - 5/8" - 1-3/8" Leg

ELECTRO GALVANIZED

 18_{GA}

M Series 3/8" Crown Staple

18 Gauge - 3/8" - 1-1/2" Leg

Use InterchangePRO® SM125LN PRO too

K Series 1/4" Crown Staple 19 Gauge - 3/4" Leg

P Series 1" Crown Staple

16 Gauge - 3/8" - 2" Leg
Use InterchangePRO® SP406 PRO tool

ELECTRO GALVANIZED

Heavy Wire Staples



N Series 7/16" Crown Staple

16 Gauge - 1/2" - 2" Leg

Use InterchangePRO® SN5016 PRO too

ELECTRO GALVANIZED STAINLESS STEEL

GSW Series 15/16" Crown Staple 14 Gauge - 7/8" Leg

ELECTRO GALVANIZED

GS16 Series 1/2" Crown Staple

16 Gauge - 3/4" - 2" Leg

ELECTRO GALVANIZED STAINLESS STEEL

BCS Series 1/2" Crown Staple 16 Gauge - 1" - 2" Leg

ELECTRO GALVANIZED

ELECTRO GALVANIZED

BCS-FS Series 1/2" Crown 15 Gauge - 1-1/2" - 2" Leg

Q Series 7/16" Crown Staple 15 Gauge - 1-1/4" - 2-1/2" Leg

16 Gauge - 5/8" - 2" Leg

ELECTRO GALVANIZED

ELECTRO GALVANIZED

6


BCS Series 1" Crown Staple

16 Gauge - 3/4" - 2" Leg

ELECTRO GALVANIZED

7600 Series 7/16" Crown Staple 6 16 Gauge - 1" - 2" Leg

ELECTRO GALVANIZED

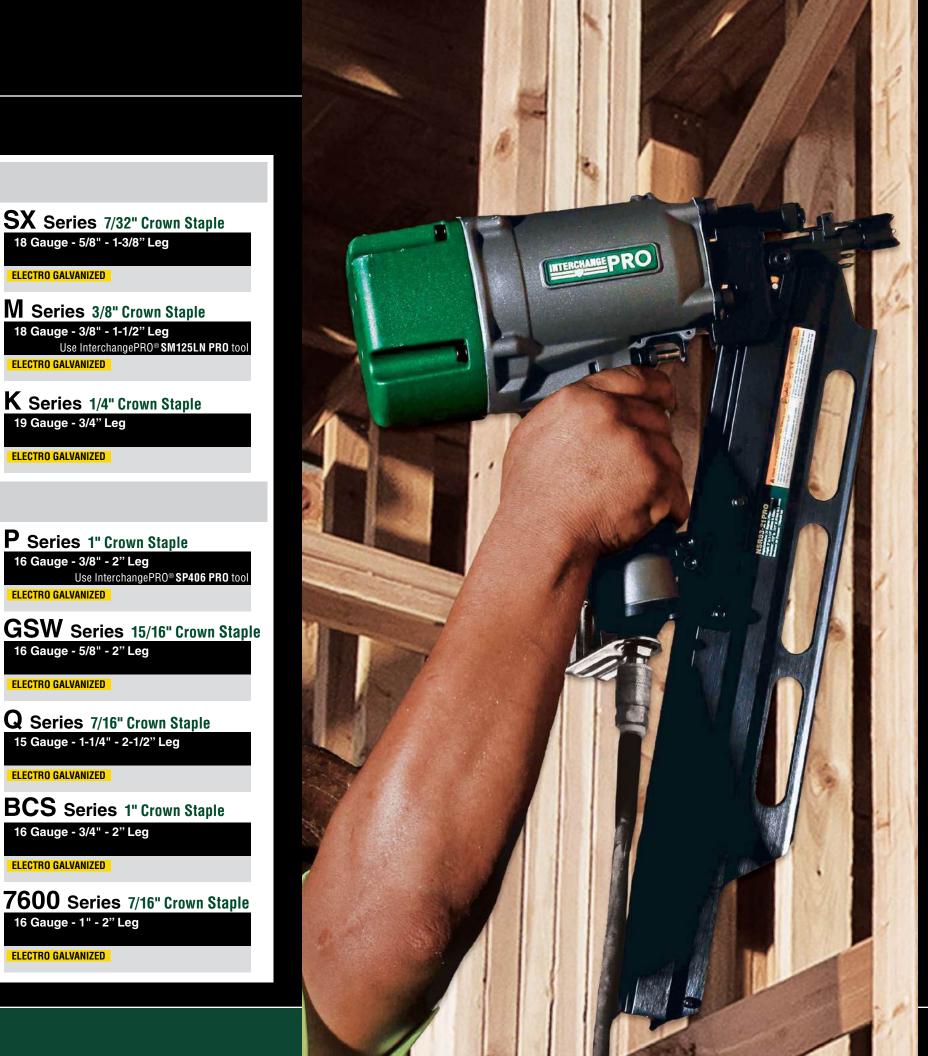

INTERCHANGE PRO

Durable, high performance tools designed for professional fastening tasks. Our selection helps you work faster, safer and with precision on every roofing job. Built to withstand tough job site conditions.

Pneumatic Tools



Item Info

Pneumatic

Tools

NSC83-28 PRO

Fastener Type

Magazine Capacity

Fastener

Range

Firing Mode Operating

Pressure Weight

86-94 Nails

Selectable trigger -Bump or Sequential Fire

_ength: 2" to 3-1/2" Length: 2" to 3-1/2" Shank Dia.: .113" to .131" "ead Dia.: .275" to .283

70-120psi, 4.8-8.3 bar

8.4 lbs., 3.8 kgs.

NSC90-34 PRO

Framing Nailer



Shank Dia.: .113" to .131" Head Dia.: .275" to .283"

86-94 Nails

Bump or Sequential trigger options

70-120psi, 4.8-8.3 bar

8.4 lbs., 3.8 kgs.

NSR83-21 PR0

Framing Nailer Part No. 65730





Length: 2" to 3-1/2" Shank Dia.: .113" to .131" Head Dia.: .275" to .283"

64 Nails

Bump Fire

70-120psi, 4.8-8.3 bar

8.2 lbs., 3.7 kgs.

NSR83-21 PRO Framer CRN4500 PRO Framing Nailer





Length: 2" to 3-1/2" Shank Dia.: .113" to .131" Head Dia.: .275" to .283'

86-94 Nails

Selectable trigger -Bump or Sequential Fire

70-120psi, 4.8-8.3 bar

8.4 lbs., 3.8 kgs.

BN200 PR0

Part No. 65776



Fastener _ength: 5/8" to 2" Range

Magazine Capacity

Item Info

Fastener

Type

Firing Mode

Weight

Fastener

Type

Fastener

Range

Magazine

Operating Pressure Shank Dia.: 18 Gauge

110 Collated Brads

Selectable trigger -Bump or Sequential Fire

70-120psi, 4.8-8.3 bar 2.7 lbs., 1.24 kgs.

FN250 PR0

16_a

Length: 1-1/4" to 2-1/2"

Shank Dia.: 16 Gauge

107 Collated Brads

Selectable trigger -Bump or Sequential Fire

70-120psi, 4.8-8.3 bar

Part No. 65775

SL150 PR0 Part No. 65777





Crown: 1/4" Leg Length: 3/8" to 1-1/2" Gauge: 18 Gauge

107 Staples

Selectable trigger -Bump or Sequential Fire

70-120psi, 4.8-8.3 bar

2.6 lbs., 1.2 kgs.

3.8 lbs., 1.72 kgs.

DA250 PRO

Part No. 65778





Selectable trigger -Bump or Sequential Fire

SM150V PRO

Part No.

Part No. 65779

MPN16 PRO





Length: 1-1/4" to 2-1/2" Shank Dia.: 15 Gauge

107 Collated Nails

70-120psi, 4.8-8.3 bar

4.6 lbs., 2.1 kgs.

Length: 2" to 3-1/2" Shank Dia.: .08" to 0.162" Head Dia.: .344"

Single

Single

70-120psi, 4.8-8.3 bar

CN565-0 PRO Part No. 65770

Item Info



ength: 1-1/4" to 2-1/2"

Shank Dia.: .080" to .105"

Head Dia.: .216" to .236"

300 Nails

Selectable trigger -Bump or Sequential Fire

70-120psi, 4.8-8.3 bar

5.07 lbs., 2.3 kgs.

Fastener Type

Fastener Range

Magazine Capacity

Firing Mode

Operating Pressure Weight

CN565-15 PRO

Part No. 65765





Length: Plastic: 1-1/4" to 2-1/2" Wire: 1-3/4" to 2-1/2" Shank Dia.: .083" to .099" Head Dia.: .197" to .236"

> 200 Plastic Nails 250-400 Wire Nails Selectable trigger -

Bump or Sequential Fire

4.4 lbs., 2.0 kgs.

70-120psi, 4.8-8.3 bar







Length: 1-3/4" to 2" Shank Dia.: .086" to .092" Head Dia.: .197" to .224"

385 Nails

Bump Fire

4.8 lbs., 2.2 kgs.

70-120psi, 4.8-8.3 bar

NSJH38-34 PRO Part No. 65755





Length: 2" to 3-1/2"

Shank Dia.: .113" to .131"

Head Dia.: .275" to .283"

64 Nails

Bump Fire

70-120psi, 4.8-8.3 bar

8.2 lbs., 3.7 kgs.

Length: 1-1/2" Shank Dia.: .131" / .148" Head Dia.: 0.28"

30 Nails

70-120psi, 4.8-8.3 bar

4.96 lbs., 2.25 kgs.

Sequential Fire

NSJH64-34 PRO Part No. 65760





Length: 1-1/2" and 2-1/2"

Item Info





Shank Dia.: .131" / .148" / Head Dia.: 0.28"

30 Nails

70-120psi, 4.8-8.3 bar

5.9 lbs., 2.7 kgs.

Sequential Fire

SP4016 PR0 Part No. 65772





140 Staples Capacity **Firing Mode**

Pressure Weight

Leg Length: 5/8" to 1-1/2" Gauge: 16 Gauge

Bump or Sequential trigger options

Operating 70-120psi, 4.8-8.3 bar 5.29 lbs., 2.4 kgs.

SN5016 PRO Part No. 65771





Crown: Medium 7/16" Leg Length: 1" to 2" Gauge: 16 Gauge

140 Staples

Selectable trigger -Bump or Sequential Fire 70-120psi, 4.8-8.3 bar

4.3 lbs., 1.94 kgs.

SM125LN PRO





TOOL Crown: Medium 3/8" Leg Length: 5/8" to 1-1/4" Gauge: 18 Gauge COMING 100 Staples

SOON!

NEW

HN500A Part No. 64281



ead Dia.: .335" to .354"

Sequential Fire

70-120psi, 4.8-8.3 bar

13.42 lbs.,6.10 kgs.

10

Interchange Pro

www.Interchange-Pro.com

Trigger Fire

(no safety)

70-120psi, 4.8-8.3 bar


2.97 lbs., 1.35 kgs.

11

1.1 lbs., 0.49 kgs.




0°



150 Nails

ACCESSORIES

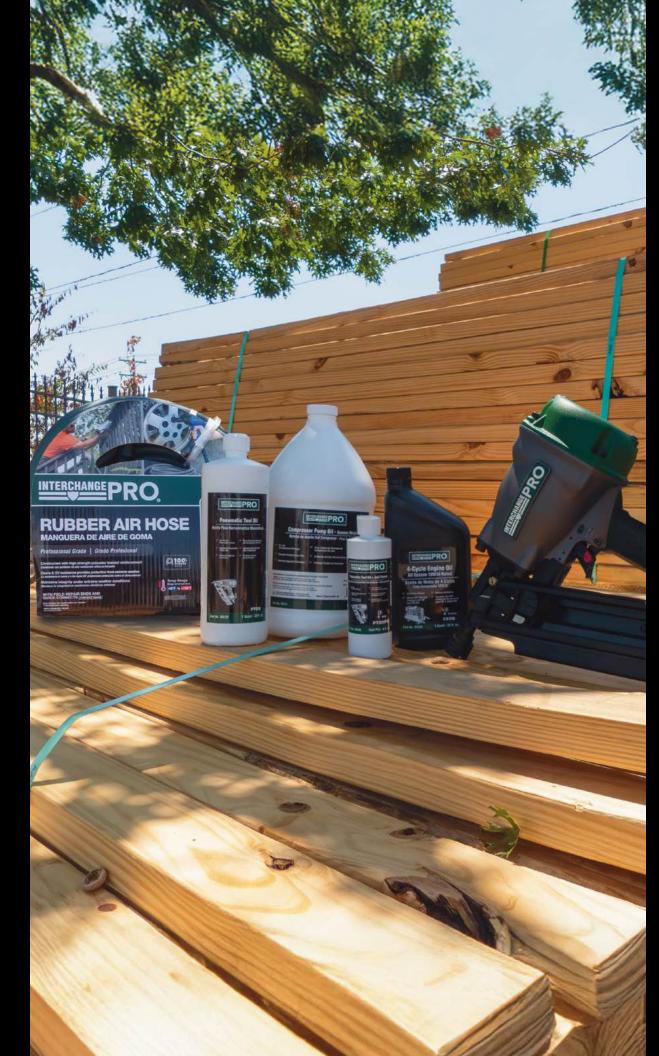

Accessories

Oils & Lubricants

Our oils and lubricants protect equipment by reducing wear, corrosion, and friction, improving efficiency, dissipating heat, and extending lifespan.

Our air hose collection includes durable poly, flexible rubber and tough PVC options. Each are built to handle demanding job site conditions while maintaining performance and reliability.



Fast-Fix Technology!

- Field Repair Ends
- · Brass 6-ball coupler and male plug installed
- Constructed with strong polyester reinforcement
- Withstands temperatures from -40°F to 165° F
- Ultra Lightweight and Flexible in cold weather

SORT NAME	MFG. NO.	DESCRIP
DIM ADE EE DIM	OAEEC	1/4" V OE

SURT NAME	MFG. NO.	DESCRIPTION
PU1425-FF-BLU	84556	1/4" X 25' BLUE
PU1450-FF-BLU	84557	1/4" X 50' BLUE
PU14100-FF-BLU	84558	1/4" X 100' BLUE



- Heavy-Duty 100% Rubber Construction
- 20% Lighter than standard rubber air hose
- Extreme Ozone & UV Resistance provides protection from extreme weather
- Flexibility in extreme conditions from -40°F to 190°F
- Constructed with high-strength polvester-braided reinforcement
- 4-finger grip bend restrictor for better ergonomics
- Oil Resistant Core & Cover
- Safety Factor 4:1

RUBBER AIR HOSE

POLY AIR HOSE

SORT NAME	MFG. NO.	SIZE
RB1450-SC	84776	1/4" X 50'
RB14100-SC	84777	1/4" X 100'
RB3850-SC	84778	3/8" X 50'
RB38100-SC	84779	3/8" X 100'
RB1250-SC	84780	*1/2" X 50'
RB12100-SC	84781	*1/2" X 100'

*½ Hose assemblies do not come with Fast Fix hose ends or Quick Couplers

PVC, Poly & Recoil



ORT NAME	MFG. NO.	SIZE

SORT NAME	MFG. NO.	SIZE
PV3825KIT-10	84789	3/8" x 25' HOSE

PVC AIR HOSE KIT

QUICK START AIR HOSE KIT INCLUDES:

1 - Pencil

1 - Teflon Tape

1 - PVC Air Hose 1 - Blow Gun

Type Gauge 1 - I/M 1/4" Female Coupler 1 - Ball Foot Tire Chuck

2 - I/M 1/4" Female Plugs 1 - I/M 1/4" Male Coupler

3 - I/M 1/4" Male Plugs

Also Available!

RECOIL AIR HOSE

PREMIUM FIELD REPAIRABLE

Poly Recoil 3/8" x 25'

PUR3825-10-SC 84788



AIR HOSE DISPLAY

SORT NAME	ITEM NO.
FG00176	444971

DESCRIPTION

DISPLAY FOR POLY AIR HOSE Sizes 1/4" X 25-ft, 1/4" x 50-ft, 1/4" x 100-ft

Compact (Approx. 2-ft x 2-ft footprint) Lightweight cardboard pop-up design

RECOIL AIR HOSE

ECONOMY

1/4" x 25' Polv Recoil Air Hose, 120 PSI

PUR1425-5-SC 84787



Pneumatic Tool Oil

For Summer or Winter

Lubricates internal parts of pneumatic tools, reducing friction and preventing wear. It also helps protect against rust, corrosion, and moisture damage for smooth, reliable performance.



Summer







Compressor

Pump Oil

Lubricates the pump components, reducing friction

and wear. It helps ensure smooth operation, cools

the pumps, and protects against rust and corrosion

For Summer or Winter

during summer or winter.



Compressor **Engine Oil**

4-Cycle Engine Oil

Lubricates and protects compressor parts. reducing friction, wear and tear. It ensures smooth operation and extends equipment life.



Accessories

Oils & Lubricants

All Season







www.Interchange-Pro.com



NOTES

Holds 24 to 60 Hoses

Nail Gun Hangers



Universal Fit

Compatible with most nail & staple guns Perfect for framing nailers on job sites, in workshops, or tool storage setups.

Secure & Convenient
Mounts to joists, rafters, or trusses
Works on flat to 12/12 pitched surfaces to
keep your tool always within reach.

Protects Your Tools Reduces drops & damage Helps extend the life of your tools by preventing accidental falls.

Space-saving when not in use
Low-profile design stays out of the way
when stored.

Get our flyer digitally!



SA	Scan the QR co

Part Number	Tools it Works with	Warranty	Description
		Nail G	iun Hanger
99102	Interchange Pro NSR83 Series Metabo NR83A Series Metabo NR90AC Series	3-Year Limited	Allows a Nail Gun to be safely hung from joists, rafters and trusses from a flat to a 12/12 pitch.



NOTES			
			<u> </u>
			
	 	 	





Accessories Nail Gun Hanger

Collated Nails

Fasteners

PRIOUT							
BRIGHT							
Length	Dia	Shank	QTY	Part No.			
1-1/2"	.148	SMOOTH	6 M	12210			
2"	.113	SMOOTH	6 M	12015			
2-1/4"	.120	SMOOTH	5 M	12020			
2-1/4"	.148	RING	4 M	14863			
2-1/4"	.148	RING	5 M	12223			
2-1/4"	.148	SCREW	4 M	14864			
2-1/4"	.148	SMOOTH	4 M	12099			
2-3/8"	.113	RING	2 M	12044			
2-3/8"	.113	RING	5 M	12030			
2-3/8"	.113	SCREW	5 M	12035			
2-3/8"	.113	SMOOTH	2 M	12041			
2-3/8"	.113	SMOOTH	5 M	12025			
2-3/8"	.148	RING	4 M	12232			
2-3/8"	.148	SCREW	4 M	12236			
2-3/8"	.148	SMOOTH	4 M	12052			
2-3/8"	.148	SMOOTH	4 M	12226			
2-1/2"	.131	RING	5 M	12051			
2-1/2"	.131	SMOOTH	2 M	12162			
2-1/2"	.131	SMOOTH	5 M	12050			
2-3/4"	.120	SCREW	4 M	12073			
3"	.120	RING	4 M	12064			
3"	.120	SCREW	4 M	12063			
3"	.120	SMOOTH	2 M	12059			
3"	.120	SMOOTH	4 M	12060			
3"	.131	RING	4 M	12074			
3"	.131	SCREW	4 M	12075			
3"	.131	SMOOTH	4 M	12070			
3"	.148	SMOOTH	4 M	12300			
3-1/4"	.120	SMOOTH	4 M	12110			
3-1/4"	.131	SCREW	4 M	12117			
3-1/4"	.131	SMOOTH	2 M	12126			
3-1/4"	.131	SMOOTH	3 M	12145			
3-1/4"	.131	SMOOTH	4 M	12115			
3-1/4"	.131	SMOOTH	4 M	12116			
3-1/4"	.148	SMOOTH	3 M	12343			
3-1/2"	.131	SMOOTH	4 M	12148			
3-1/2"	.135	SMOOTH	4 M	12152			
3-1/2"	.162	SMOOTH	3 M	12158			
3-3/4"	.131	SMOOTH	1.25 M	12149			
5"	.148	SMOOTH	1.8 M	12160			

ELECTRO GALVANIZED						
Length	Dia	Shank	QTY	Part No.		
2"	.113	RING	6 M	12017		
2"	.113	SMOOTH	6 M	12016		
2-3/8"	.113	RING	5 M	12042		
2-3/8"	.113	SMOOTH	5 M	12040		
2-1/2"	.131	SMOOTH	5 M	12055		
3"	.120	RING	4 M	12066		
3"	.120	SCREW	4 M	12069		
3"	.120	SMOOTH	4 M	12061		
3"	.131	RING	4 M	12087		
3"	.131	SMOOTH	4 M	12085		
3-1/4"	.120	SCREW	4 M	12112		
3-1/4"	.131	SCREW	4 M	12122		
3-1/4"	.131	SMOOTH	4 M	12125		



NSR83-21 PRO Framing Nailer Part No. 65730 See Page 10



NSR83-21 PR0 Framer Framing Nailer Part No. 65735 See Page 10



Length	Dia	Shank	QTY	Part No.
2"	.113	RING	2 M	12006
2"	.113	RING	6 M	12008
2-1/4"	.120	SCREW	2 M	13106
2-1/4"	.148	SMOOTH	4 M	10199
2-3/8"	.113	RING	2 M	12036
2-3/8"	.113	RING	5 M	12038
2-3/8"	.113	SMOOTH	2 M	12034
2-3/8"	.113	SMOOTH	5 M	12037
2-3/8"	.148	RING	4 M	12159
2-3/8"	.148	SMOOTH	4 M	12146
2-1/2"	.131	RING	5 M	12161
2-1/2"	.131	SMOOTH	4 M	12033
2-1/2"	.131	SMOOTH	5 M	12024
3"	.120	RING	2 M	12054
3"	.120	RING	4 M	12053
3"	.120	SCREW	4 M	12072
3"	.120	SMOOTH	4 M	12062
3"	.131	RING	2 M	12084
3"	.131	RING	4 M	12083
3"	.131	SMOOTH	2 M	12079
3"	.131	SMOOTH	4 M	12082
3"	.148	SMOOTH	4 M	12097
3-1/4"	.120	RING	2 M	12119
3-1/4"	.120	RING	4 M	12109
3-1/4"	.120	SCREW	2 M	12103
3-1/4"	.131	SCREW	2 M	12141
3-1/4"	.131	SCREW	4 M	12142
3-1/4"	.131	SMOOTH	2 M	12139
3-1/4"	.131	SMOOTH	4 M	12140
3-1/4"	.148	SMOOTH	3 M	12056
3-1/2"	.162	SMOOTH	3 M	12156

These Interchange PRO nails are designed to fit most brands of tools. Interchange PRO DPS nails are used for framing, decking, sheathing, subflooring, truss construction and more applications.

The coating on Hot Galvanized nails could be hot dipped zinc, hot dipped wire zinc or thermal diffused zinc. All hot galvanized nails comply with ASTM A153 standards.

STAINLESS STEEL - 304				
Length	Dia	Shank	QTY	Part No.
2"	.113	RING	1 M	12005
2-3/8"	.113	RING	1 M	21054
3"	.120	RING	1 M	12012
3"	.120	RING	4 M	12067
3"	.131	RING	1 M	12078
3"	.131	SCREW	1 M	12077

STAINLESS STEEL - 316					
Length	Dia	Shank	QTY	Part No.	
2"	.109	RING	1 M	12004	
2-3/8"	.113	RING	1 M	12026	
2-1/2"	.120	SCREW	1 M	12027	
3"	.120	RING	1 M	12094	
3"	.131	RING	1 M	12098	
3"	.131	SCREW	1 M	12093	
3-1/4"	.120	RING	1 M	12101	
3-1/4"	.131	SCREW	1 M	12127	

BRIGHT

Uncoated Steel Finish. Ideal for indoor projects. Complies with ASTM F1667 Standards.

ELECTRO GALVANIZED

Limited Corrosion Protection. Ideal for both Indoor & Light Outdoor use. Complies with ASTM F1667 & A641 Standards.

ELECTRO GALVANIZED

Limited Corrosion Protection. Ideal for both Indoor & Light Outdoor use. Complies with ASTM F1667 & A641 Standards.

HOT GALVANIZED

High Corrosion Protection - ACQ Approved. Ideal for outdoor & high-moisture environments. Complies with ASTM F1667 & A153 Standards.

STAINLESS STEEL

High Corrosion Protection - ACQ Approved. Ideal for outdoor & high-moisture environments. Ideal for use in Cedar, Redwood and Treated Lumber.

ALUMINUM

High Corrosion Protection. Ideal for specialty exterior projects. Do not use in treated lumber.

Collated Nails

Fasteners

	BRIGHT					
Length	Dia	Shank	QTY	Part No.		
2"	.113	RING	5 M	10420		
2"	.113	SMOOTH	5 M	10410		
2-1/4"	.113	SMOOTH	1 M	10450		
2-3/8"	.113	RING	2 M	10472		
2-3/8"	.113	RING	5 M	10470		
2-3/8"	.113	SMOOTH	2 M	10462		
2-3/8"	.113	SMOOTH	5 M	10460		
2-3/8"	.120	RING	5 M	10496		
2-3/8"	.120	SMOOTH	5 M	10494		
2-3/4"	.120	SMOOTH	2.5 M	13095		
3"	.120	RING	2.5 M	10510		
3"	.120	SMOOTH	2 M	10502		
3"	.120	SMOOTH	2.5 M	10500		
3"	.131	RING	2.5 M	10537		
3"	.131	SMOOTH	2 M	10532		
3"	.131	SMOOTH	2.5 M	10530		
3-1/4"	.120	SMOOTH	2.5 M	10547		
3-1/4"	.131	RING	2.5 M	10555		
3-1/4"	.131	SMOOTH	2 M	10558		
3-1/4"	.131	SMOOTH	2.5 M	10550		
3-1/2"	.131	SMOOTH	2.5 M	10570		

NSC90-34 PRO Framing Nailer Part No. 65745
See Page 10

The NSC90-34 PRO can be used for both PT and PTOR Fasteners.


ELECTRO GALVANIZED				
Length	Dia	Shank	QTY	Part No.
2"	.113	RING	5 M	10440
2-3/8"	.113	RING	5 M	10490
2-3/8"	.113	SMOOTH	5 M	10480
3"	.120	RING	2.5 M	10520
3-1/4"	.120	RING	2.5 M	10548

HOT GALVANIZED					
Length	Dia	Shank	QTY	Part No.	
2"	.113	RING	2 M	10780	
2-3/8"	.113	RING	2 M	10784	
2-3/8"	.113	RING	5 M	10495	
2-3/8"	.113	SMOOTH	2 M	10782	
2-3/8"	.113	SMOOTH	5 M	10485	
2-3/8"	.120	RING	2 M	10788	
2-3/8"	.120	RING	5 M	10492	
3"	.120	RING	2 M	10790	
3"	.120	RING	2.5 M	10525	
3"	.131	RING	2.5 M	10546	
3"	.131	SMOOTH	2 M	10792	
3"	.131	SMOOTH	2.5 M	10545	
3-1/4"	.120	RING	2 M	10793	
3-1/4"	.120	RING	2.5 M	10549	
3-1/4"	.131	RING	2 M	10796	
3-1/4"	.131	RING	2.5 M	10567	
3-1/4"	.131	SMOOTH	2 M	10794	
3-1/4"	.131	SMOOTH	2.5 M	10565	
3-1/2"	.131	RING	2 M	10799	
3-1/2"	.131	SMOOTH	2 M	10798	

These Interchange PRO nails are designed to fit most brands of tools. Interchange PRO PT and PTOR nails are used for framing, decking, sheathing, siding, fencing and truss construction.

BRIGHT					
Length	Dia	Shank	QTY	Part No.	
2"	.113	SMOOTH	5.5 M	54383	
2-3/8"	.113	RING	5 M	10683	
2-3/8"	.113	SMOOTH	5 M	10681	
2-1/2"	.131	SMOOTH	2.5 M	10707	
2-3/4"	.120	SMOOTH	3 M	10708	
3"	.120	SMOOTH	2.5 M	10686	
3"	.131	SMOOTH	2.5 M	10694	
3-1/4"	.120	RING	2.5 M	10805	
3-1/4"	.131	SMOOTH	2.5 M	10699	

HOT GALVANIZED					
Length	Dia	Shank	QTY	Part No.	
2"	.113	RING	2 M	10800	
2-3/8"	.113	RING	2 M	10802	
2-3/8"	.113	SMOOTH	5 M	10682	
3"	.120	RING	2 M	10804	
3"	.120	RING	2.5 M	10692	
3"	.131	SMOOTH	2 M	54382	
3"	.148	SMOOTH	2 M	50141	
3-1/4"	.131	RING	2 M	10808	
3-1/2"	.131	SMOOTH	2 M	54381	



The coating on Hot Galvanized nails could be hot dipped zinc, hot dipped wire zinc or thermal diffused zinc. All hot galvanized nails comply with ASTM A153 standards.

STAINLESS STEEL - 304				
Length	Dia	Shank	QTY	Part No.
2-3/8"	.113	RING	1 M	10679
3"	.120	RING	1 M	10693
3-1/4"	.120	RING	1 M	10701



Fasteners

Collated Nails

BRIGHT

Uncoated Steel Finish. Ideal for indoor projects. Complies with ASTM F1667 Standards.

ELECTRO GALVANIZED

Limited Corrosion Protection. Ideal for both Indoor & Light Outdoor use. Complies with ASTM F1667 & A641 Standards.

ELECTRO GALVANIZED

Limited Corrosion Protection. Ideal for both Indoor & Light Outdoor use. Complies with ASTM F1667 & A641 Standards.

HOT GALVANIZED

High Corrosion Protection - ACQ Approved. Ideal for outdoor & high-moisture environments. Complies with ASTM F1667 & A153 Standards.

STAINLESS STEEL

High Corrosion Protection - ACQ Approved. Ideal for outdoor & high-moisture environments. Ideal for use in Cedar, Redwood and Treated Lumber.

ALUMINUM

High Corrosion Protection. Ideal for specialty exterior projects. Do not use in treated lumber.



ELECTRO GALVANIZED				
Length	Dia	Shank	QTY	Part No.
2-3/8"	.113	SMOOTH	2 M	10061
3"	.131	SMOOTH	2 M	10111
3"	.131	SMOOTH	2 M	10111

HOT GALVANIZED					
Length	Dia	Shank	QTY	Part No.	
2"	.113	RING	2 M	10035	
2-3/8"	.113	RING	2 M	10077	
3"	.120	RING	2 M	10099	
3-1/4"	.131	RING	2 M	10143	

These Interchange PRO nails are designed to fit most brands of tools. Interchange PRO BW nails are used for framing, subflooring, decking, sheathing, siding, truss construction and framing applications.





himministration

Find our Interchange PRO Air Hose on page 14.

BRIGHT							
Length	Dia	Shank	QTY	Part No.			
1-1/2"	.131	SMOOTH	4 M	10605			
1-1/2"	.148	SMOOTH	1 M	10589			
1-1/2"	.148	SMOOTH	3 M	10610			
2-1/2"	.131	SMOOTH	2.5 M	10618			
2-1/2"	.148	SMOOTH	2.5 M	10620			
2-1/2"	.162	SMOOTH	2 M	10616			

ELECTRO GALVANIZED						
Length	Dia	Shank	QTY	Part No.		
1-1/2"	.131	SMOOTH	4 M	10604		
1-1/2"	.148	SMOOTH	3 M	10609		



NSJH38-34 PRO Joist Hanger Nailer Part No. 65755 See Page 10



NSJH64-34 PRO Joist Hanger Nailer Part No. 65760 See Page 10



HOT GALVANIZED							
Length	Dia	Shank	QTY	Part No.			
1-1/2"	.131	SMOOTH	4 M	10606			
1-1/2"	.148	SMOOTH	1 M	10590			
1-1/2"	.148	SMOOTH	3 M	10608			
2-1/2"	.148	SMOOTH	2.5 M	10612			
2-1/2"	.162	SMOOTH	2 M	10617			

Interchange PRO PTJH nails are used for joist hanging and metal connector installation applications.

The coating on Hot Galvanized nails could be hot dipped zinc, hot dipped wire zinc or thermal diffused zinc. All hot galvanized nails comply with ASTM A153 standards.



BRIGHT

Uncoated Steel Finish. Ideal for indoor projects. Complies with ASTM F1667 Standards.

ELECTRO GALVANIZED

Limited Corrosion Protection. Ideal for both Indoor & Light Outdoor use. Complies with ASTM F1667 & A641 Standards.

ELECTRO GALVANIZED

Limited Corrosion Protection.
Ideal for both Indoor & Light Outdoor use.
Complies with ASTM F1667 & A641 Standards.

HOT GALVANIZED

High Corrosion Protection - ACQ Approved. Ideal for outdoor & high-moisture environments. Complies with ASTM F1667 & A153 Standards.

STAINLESS STEEL

High Corrosion Protection - ACQ Approved. Ideal for outdoor & high-moisture environments. Ideal for use in Cedar, Redwood and Treated Lumber.

ALUMINUM

High Corrosion Protection. Ideal for specialty exterior projects. Do not use in treated lumber. **Fasteners**

Collated Nails



Fasteners Collated Nails

Pitch Length Dia Shank QTY Part No. 6.8 1-1/4" .083 RING 16 M 16060 6.8 1-1/4" .083 SMOOTH 14 M 16057 6.8 1-1/4" .086 RING 10.5 M 16058 6.8 1-1/4" .086 SCREW 10.5 M 16071 8.0 1-1/4" .099 RING 9 M 16279 6.8 1-1/2" .083 RING 14 M 80241 6.8 1-1/2" .083 RING 16 M 16061 6.8 1-1/2" .086 SCREW 10.5 M 16072 6.8 1-1/2" .086 SCREW 9 M 16714 8.0 1-1/2" .099 SCREW 9 M 16392 8.0 1-1/2" .099 SCREW 9 M 16342 6.8 1-3/4" .086 RING 16 M 16062 6.8						
6.8			В	RIGHT		
6.8	Pitch	Length	Dia	Shank	QTY	Part No.
6.8 1-1/4"	6.8	1-1/4"	.083	RING	16 M	16060
6.8 1-1/4" .086 SCREW 10.5 M 16071 8.0 1-1/4" .099 RING 9 M 16279 6.8 1-1/2" .083 RING 14 M 80241 6.8 1-1/2" .086 RING 10.5 M 16077 6.8 1-1/2" .086 SCREW 10.5 M 16072 6.8 1-1/2" .092 SCREW 9 M 16714 8.0 1-1/2" .099 SCREW 14.4 M 38582 8.0 1-1/2" .099 SCREW 14.4 M 38582 8.0 1-1/2" .099 SCREW 14.4 M 38582 8.0 1-1/2" .113 SMOOTH 12 M 16396 8.0 1-1/2" .113 SMOOTH 4.5 M 16342 6.8 1-3/4" .086 SCREW 10.5 M 16082 6.8 1-3/4" .086 SCREW 14 M 16083 6.8	6.8	1-1/4"	.083	SMOOTH	14 M	16057
8.0 1-1/4" .099 RING 9 M 16279 6.8 1-1/2" .083 RING 14 M 80241 6.8 1-1/2" .086 RING 16 M 16061 6.8 1-1/2" .086 SCREW 10.5 M 16077 6.8 1-1/2" .092 SCREW 10.5 M 16072 6.8 1-1/2" .099 SCREW 9 M 16714 8.0 1-1/2" .099 SMOOTH 12 M 16396 8.0 1-1/2" .099 SMOOTH 12 M 16396 8.0 1-1/2" .113 SMOOTH 4.5 M 16342 6.8 1-3/4" .083 RING 16 M 16062 6.8 1-3/4" .086 SCREW 10.5 M 16083 6.8 1-3/4" .086 SCREW 14 M 16083 6.8 1-3/4" .086 SCREW 14 M 16095 8.0	6.8	1-1/4"	.086	RING	10.5 M	16058
6.8	6.8	1-1/4"	.086	SCREW	10.5 M	16071
6.8	8.0	1-1/4"	.099	RING	9 M	16279
6.8	6.8	1-1/2"	.083	RING	14 M	80241
6.8 1-1/2" .086 SCREW 10.5 M 16072 6.8 1-1/2" .092 SCREW 9 M 16714 8.0 1-1/2" .099 SCREW 14.4 M 38582 8.0 1-1/2" .099 SMOOTH 12 M 16396 8.0 1-1/2" .113 SMOOTH 4.5 M 16342 6.8 1-3/4" .083 RING 16 M 16062 6.8 1-3/4" .086 RING 10.5 M 14163 6.8 1-3/4" .086 SCREW 10.5 M 16083 6.8 1-3/4" .086 SCREW 14 M 16083 6.8 1-3/4" .086 SCREW 14 M 16095 8.0 1-3/4" .099 SCREW 14 M 16095 8.0 1-3/4" .099 SCREW 9 M 16110 8.0 1-3/4" .099 SCREW 9 M 16111 6.8	6.8	1-1/2"	.083	RING	16 M	16061
6.8 1-1/2" .092 SCREW 9 M 16714 8.0 1-1/2" .099 SCREW 14.4 M 38582 8.0 1-1/2" .099 SMOOTH 12 M 16396 8.0 1-1/2" .113 SMOOTH 4.5 M 16342 6.8 1-3/4" .083 RING 16 M 16062 6.8 1-3/4" .086 RING 10.5 M 14163 6.8 1-3/4" .086 SCREW 10.5 M 16083 6.8 1-3/4" .086 SCREW 14 M 16083 6.8 1-3/4" .086 SCREW 14 M 16095 8.0 1-3/4" .099 SCREW 9 M 16112 8.0 1-3/4" .099 SCREW 9 M 16110 8.0 1-3/4" .099 SCREW 9 M 16111 6.8 2" .099 SCREW 9 M 16111 6.8 2"	6.8	1-1/2"	.086	RING	10.5 M	16077
8.0 1-1/2" .099 SCREW 14.4 M 38582 8.0 1-1/2" .099 SMOOTH 12 M 16396 8.0 1-1/2" .113 SMOOTH 4.5 M 16342 6.8 1-3/4" .083 RING 16 M 16062 6.8 1-3/4" .086 RING 10.5 M 14163 6.8 1-3/4" .086 SCREW 10.5 M 16083 6.8 1-3/4" .086 SCREW 14 M 16083 6.8 1-3/4" .086 SCREW 14 M 16095 8.0 1-3/4" .086 SCREW 14 M 16095 8.0 1-3/4" .099 SCREW 9 M 16110 8.0 1-3/4" .099 SCREW 9 M 16111 6.8 2" .086 SCREW 9 M 16111 6.8 2" .092 SCREW 9 M 16271 8.0 2" <td>6.8</td> <td>1-1/2"</td> <td>.086</td> <td>SCREW</td> <td>10.5 M</td> <td>16072</td>	6.8	1-1/2"	.086	SCREW	10.5 M	16072
8.0 1-1/2" .099 SMOOTH 12 M 16396 8.0 1-1/2" .113 SMOOTH 4.5 M 16342 6.8 1-3/4" .083 RING 16 M 16062 6.8 1-3/4" .086 RING 10.5 M 14163 6.8 1-3/4" .086 SCREW 10.5 M 16083 6.8 1-3/4" .086 SCREW 14 M 16486 6.8 1-3/4" .086 SCREW 14 M 16095 8.0 1-3/4" .099 SCREW 9 M 16112 8.0 1-3/4" .099 SCREW 9 M 16110 8.0 1-3/4" .099 SCREW 9 M 16110 8.0 2" .086 SCREW 9 M 16092 8.0 2" .092 SCREW 9 M 16094 8.0 2" .099 RING 9 M 16115 8.0 2"	6.8	1-1/2"	.092	SCREW	9 M	16714
8.0 1-1/2" .113 SMOOTH 4.5 M 16342 6.8 1-3/4" .083 RING 16 M 16062 6.8 1-3/4" .086 RING 10.5 M 14163 6.8 1-3/4" .086 SCREW 10.5 M 16083 6.8 1-3/4" .086 SCREW 14 M 16486 6.8 1-3/4" .086 SCREW 14 M 16095 8.0 1-3/4" .099 SCREW 14 M 16095 8.0 1-3/4" .099 SCREW 9 M 16110 8.0 1-3/4" .099 SCREW 9 M 16110 8.0 1-3/4" .099 SCREW 9 M 16111 6.8 2" .086 SCREW 9 M 16092 8.0 2" .092 SCREW 9 M 16094 8.0 2" .099 RING 9 M 16115 8.0 2"	8.0	1-1/2"	.099	SCREW	14.4 M	38582
8.0 1-1/2" .113 SMOOTH 4.5 M 16342 6.8 1-3/4" .083 RING 16 M 16062 6.8 1-3/4" .086 RING 10.5 M 14163 6.8 1-3/4" .086 SCREW 10.5 M 16083 6.8 1-3/4" .086 SCREW 14 M 16486 6.8 1-3/4" .086 SCREW 14 M 16095 8.0 1-3/4" .099 SCREW 14 M 16095 8.0 1-3/4" .099 SCREW 9 M 16110 8.0 1-3/4" .099 SCREW 9 M 16110 8.0 1-3/4" .099 SCREW 9 M 16111 6.8 2" .086 SCREW 9 M 16092 8.0 2" .092 SCREW 9 M 16094 8.0 2" .099 RING 9 M 16115 8.0 2"	8.0	1-1/2"	.099	SMOOTH	12 M	16396
6.8	8.0	1-1/2"	.113	SMOOTH	4.5 M	16342
6.8	6.8	1-3/4"	.083	RING	16 M	16062
6.8 1-3/4" .086 SCREW 14 M 16486 6.8 1-3/4" .086 SCREW 14 M 16095 8.0 1-3/4" .099 SCREW 12 M 16112 8.0 1-3/4" .099 SCREW 9 M 16110 8.0 1-3/4" .099 SCREW 9 M 16111 6.8 2" .086 SCREW 9 M 16092 8.0 2" .092 SCREW 9 M 16094 8.0 2" .092 SCREW 9 M 16094 8.0 2" .099 RING 9 M 16271 8.0 2" .099 RING 9 M 16115 8.0 2" .099 SCREW 9 M 16116 8.0 2" .113 RING 3 M 16517 8.0 2" .113 RING 9 M 16190 8.0 2-1/4" .099	6.8	1-3/4"	.086	RING	10.5 M	14163
6.8 1-3/4" .086 SCREW 14 M 16095 8.0 1-3/4" .099 SCREW 12 M 16112 8.0 1-3/4" .099 SCREW 9 M 16110 8.0 1-3/4" .099 SCREW 9 M 16111 6.8 2" .086 SCREW 9 M 16092 8.0 2" .092 SCREW 9 M 16092 8.0 2" .092 SCREW 9 M 16094 8.0 2" .099 RING 9 M 16271 8.0 2" .099 RING 9 M 16115 8.0 2" .099 SCREW 9 M 16116 8.0 2" .099 SCREW 9 M 16517 8.0 2" .113 RING 3 M 16517 8.0 2" .113 SCREW 9 M 16190 8.0 2-1/4" .099 RING	6.8	1-3/4"	.086	SCREW	10.5 M	16083
8.0 1-3/4" .099 SCREW 12 M 16112 8.0 1-3/4" .099 SCREW 9 M 16110 8.0 1-3/4" .099 SCREW 9 M 16111 6.8 2" .086 SCREW 9 M 16092 8.0 2" .092 SCREW 9 M 16094 8.0 2" .099 RING 9 M 16271 8.0 2" .099 RING 9 M 16271 8.0 2" .099 SCREW 9 M 16115 8.0 2" .099 SCREW 9 M 16116 8.0 2" .099 SCREW 9 M 16517 8.0 2" .113 RING 9 M 16501 8.0 2" .113 SCREW 9 M 16537 6.8 2-1/4" .099 RING 9 M 16190 8.0 2-1/4" .099 SCREW<	6.8	1-3/4"	.086	SCREW	14 M	16486
8.0 1-3/4" .099 SCREW 9 M 16110 8.0 1-3/4" .099 SCREW 9 M 16111 6.8 2" .086 SCREW 9 M 16092 8.0 2" .092 SCREW 9 M 16183 6.8 2" .092 SCREW 9 M 16094 8.0 2" .099 RING 9 M 16271 8.0 2" .099 RING 9 M 16271 8.0 2" .099 SCREW 9 M 16115 8.0 2" .099 SCREW 9 M 16116 8.0 2" .113 RING 3 M 16517 8.0 2" .113 RING 9 M 16501 8.0 2" .113 SCREW 9 M 16190 8.0 2-1/4" .099 RING 9 M 16190 8.0 2-1/4" .099 SCREW	6.8	1-3/4"	.086	SCREW	14 M	16095
8.0 1-3/4" .099 SCREW 9 M 16111 6.8 2" .086 SCREW 9 M 16092 8.0 2" .092 SCREW 9 M 16183 6.8 2" .092 SCREW 9 M 16094 8.0 2" .099 RING 9 M 16271 8.0 2" .099 RING 9 M 16115 8.0 2" .099 SCREW 9 M 16116 8.0 2" .099 SCREW 9 M 16517 8.0 2" .113 RING 9 M 16501 8.0 2" .113 SCREW 9 M 16501 8.0 2" .113 SCREW 9 M 16501 8.0 2-1/4" .090 RING 9 M 16190 8.0 2-1/4" .099 SCREW 9 M 16119 8.0 2-1/4" .113 SCREW	8.0	1-3/4"	.099	SCREW	12 M	16112
6.8 2" .086 SCREW 9 M 16092 8.0 2" .092 SCREW 9 M 16183 6.8 2" .092 SCREW 9 M 16094 8.0 2" .099 RING 9 M 16271 8.0 2" .099 RING 9 M 19776 8.0 2" .099 SCREW 9 M 16115 8.0 2" .099 SCREW 9 M 16517 8.0 2" .113 RING 3 M 16517 8.0 2" .113 RING 9 M 16501 8.0 2" .113 SCREW 9 M 16190 8.0 2-1/4" .090 RING 9 M 16190 8.0 2-1/4" .099 SCREW 9 M 16119 8.0 2-1/4" .099 SCREW 9 M 16120 8.0 2-1/4" .113 SCREW	8.0	1-3/4"	.099	SCREW	9 M	16110
8.0 2" .092 SCREW 9 M 16183 6.8 2" .092 SCREW 9 M 16094 8.0 2" .099 RING 9 M 16271 8.0 2" .099 RING 9 M 19776 8.0 2" .099 SCREW 9 M 16115 8.0 2" .099 SCREW 9 M 16116 8.0 2" .113 RING 3 M 16517 8.0 2" .113 RING 9 M 16501 8.0 2" .113 SCREW 9 M 16501 8.0 2" .113 SCREW 9 M 16190 8.0 2" .113 SCREW 9 M 16597 6.8 2-1/4" .090 RING 9 M 16190 8.0 2-1/4" .099 SCREW 9 M 16119 8.0 2-1/4" .099 SCREW 9 M 16119 8.0 2-1/4" .099 SCREW 9 M 16190 8.0 2-1/4" .099 SCREW 9 M 16190 8.0 2-1/4" .099 SCREW 9 M 16119 8.0 2-1/4" .113 SCREW 6.75 M 16197 8.0 2-1/4" .113 SCREW 9 M 16141 8.0 2-3/8" .113 RING 3 M 16535 8.0 2-3/8" .113 RING 3 M 16535	8.0	1-3/4"	.099	SCREW	9 M	16111
6.8 2" .092 SCREW 9 M 16094 8.0 2" .099 RING 9 M 16271 8.0 2" .099 RING 9 M 19776 8.0 2" .099 SCREW 9 M 16115 8.0 2" .099 SCREW 9 M 16116 8.0 2" .113 RING 3 M 16517 8.0 2" .113 RING 9 M 16501 8.0 2" .113 SCREW 9 M 16501 8.0 2" .113 SCREW 9 M 16537 6.8 2-1/4" .090 RING 9 M 16190 8.0 2-1/4" .099 RING 9 M 16190 8.0 2-1/4" .099 SCREW 9 M 16119 8.0 2-1/4" .099 SCREW 9 M 16190 8.0 2-1/4" .099 SCREW 9 M 16190 8.0 2-1/4" .113 SCREW 9 M 16190 8.0 2-1/4" .113 SCREW 9 M 16197 8.0 2-1/4" .113 SCREW 9 M 16141 8.0 2-3/8" .113 RING 3 M 16535 8.0 2-3/8" .113 RING 3 M 16535	6.8	2"	.086	SCREW	9 M	16092
8.0 2" .099 RING 9 M 16271 8.0 2" .099 RING 9 M 19776 8.0 2" .099 SCREW 9 M 16115 8.0 2" .099 SCREW 9 M 16517 8.0 2" .113 RING 3 M 16517 8.0 2" .113 RING 9 M 16501 8.0 2" .113 SCREW 9 M 16537 6.8 2-1/4" .090 RING 9 M 16190 8.0 2-1/4" .099 RING 9 M 16190 8.0 2-1/4" .099 SCREW 9 M 16119 8.0 2-1/4" .099 SCREW 9 M 16120 8.0 2-1/4" .113 SCREW 9 M 16141 8.0 2-1/4" .113 SCREW 9 M 16141 8.0 2-3/8" .113 R	8.0	2"	.092	SCREW	9 M	16183
8.0 2" .099 RING 9 M 19776 8.0 2" .099 SCREW 9 M 16115 8.0 2" .099 SCREW 9 M 16116 8.0 2" .113 RING 3 M 16517 8.0 2" .113 RING 9 M 16501 8.0 2" .113 SCREW 9 M 16537 6.8 2-1/4" .090 RING 9 M 16190 8.0 2-1/4" .099 RING 9 M 16119 8.0 2-1/4" .099 SCREW 9 M 16120 8.0 2-1/4" .113 SCREW 9 M 16120 8.0 2-1/4" .113 SCREW 9 M 16141 8.0 2-1/4" .113 SCREW 9 M 16141 8.0 2-1/4" .113 SMOOTH 4.5 M 16239 8.0 2-3/8" .113	6.8	2"	.092	SCREW	9 M	16094
8.0 2" .099 SCREW 9 M 16115 8.0 2" .099 SCREW 9 M 16116 8.0 2" .113 RING 3 M 16517 8.0 2" .113 RING 9 M 16501 8.0 2" .113 SCREW 9 M 16537 6.8 2-1/4" .090 RING 9 M 16190 8.0 2-1/4" .099 RING 9 M 13101 8.0 2-1/4" .099 SCREW 9 M 16119 8.0 2-1/4" .099 SCREW 9 M 16119 8.0 2-1/4" .099 SCREW 9 M 16120 8.0 2-1/4" .113 SCREW 6.75 M 16197 8.0 2-1/4" .113 SCREW 9 M 16141 8.0 2-1/4" .113 RING 3 M 16535 8.0 2-3/8" .113 RING 3 M 16535	8.0	2"	.099	RING	9 M	16271
8.0 2" .099 SCREW 9 M 16116 8.0 2" .113 RING 3 M 16517 8.0 2" .113 RING 9 M 16501 8.0 2" .113 SCREW 9 M 16537 6.8 2-1/4" .090 RING 9 M 16190 8.0 2-1/4" .099 RING 9 M 13101 8.0 2-1/4" .099 SCREW 9 M 16119 8.0 2-1/4" .099 SCREW 9 M 16120 8.0 2-1/4" .113 SCREW 9 M 16141 8.0 2-1/4" .113 SCREW 9 M 16141 8.0 2-1/4" .113 SMOOTH 4.5 M 16239 8.0 2-3/8" .113 RING 3 M 16535 8.0 2-3/8" .113 RING 4.5 M 16198	8.0	2"	.099	RING	9 M	19776
8.0 2" .113 RING 3 M 16517 8.0 2" .113 RING 9 M 16501 8.0 2" .113 SCREW 9 M 16537 6.8 2-1/4" .090 RING 9 M 16190 8.0 2-1/4" .099 RING 9 M 13101 8.0 2-1/4" .099 SCREW 9 M 16119 8.0 2-1/4" .099 SCREW 9 M 16120 8.0 2-1/4" .113 SCREW 6.75 M 16197 8.0 2-1/4" .113 SCREW 9 M 16141 8.0 2-1/4" .113 SMOOTH 4.5 M 16239 8.0 2-3/8" .113 RING 3 M 16535 8.0 2-3/8" .113 RING 4.5 M 16198	8.0	2"	.099	SCREW	9 M	16115
8.0 2" .113 RING 9 M 16501 8.0 2" .113 SCREW 9 M 16537 6.8 2-1/4" .090 RING 9 M 16190 8.0 2-1/4" .099 RING 9 M 13101 8.0 2-1/4" .099 SCREW 9 M 16119 8.0 2-1/4" .099 SCREW 9 M 16120 8.0 2-1/4" .113 SCREW 6.75 M 16197 8.0 2-1/4" .113 SCREW 9 M 16141 8.0 2-1/4" .113 SMOOTH 4.5 M 16239 8.0 2-3/8" .113 RING 3 M 16535 8.0 2-3/8" .113 RING 4.5 M 16198	8.0	2"	.099	SCREW	9 M	16116
8.0 2" .113 SCREW 9 M 16537 6.8 2-1/4" .090 RING 9 M 16190 8.0 2-1/4" .099 RING 9 M 13101 8.0 2-1/4" .099 SCREW 9 M 16119 8.0 2-1/4" .099 SCREW 9 M 16120 8.0 2-1/4" .113 SCREW 6.75 M 16197 8.0 2-1/4" .113 SCREW 9 M 16141 8.0 2-1/4" .113 SMOOTH 4.5 M 16239 8.0 2-3/8" .113 RING 3 M 16535 8.0 2-3/8" .113 RING 4.5 M 16198	8.0	2"	.113	RING	3 M	16517
6.8 2-1/4" .090 RING 9 M 16190 8.0 2-1/4" .099 RING 9 M 13101 8.0 2-1/4" .099 SCREW 9 M 16119 8.0 2-1/4" .099 SCREW 9 M 16120 8.0 2-1/4" .113 SCREW 6.75 M 16197 8.0 2-1/4" .113 SCREW 9 M 16141 8.0 2-1/4" .113 SMOOTH 4.5 M 16239 8.0 2-3/8" .113 RING 3 M 16535 8.0 2-3/8" .113 RING 4.5 M 16198	8.0	2"	.113	RING	9 M	16501
8.0 2-1/4" .099 RING 9 M 13101 8.0 2-1/4" .099 SCREW 9 M 16119 8.0 2-1/4" .099 SCREW 9 M 16120 8.0 2-1/4" .113 SCREW 6.75 M 16197 8.0 2-1/4" .113 SCREW 9 M 16141 8.0 2-1/4" .113 SMOOTH 4.5 M 16239 8.0 2-3/8" .113 RING 3 M 16535 8.0 2-3/8" .113 RING 4.5 M 16198	8.0	2"	.113	SCREW	9 M	16537
8.0 2-1/4" .099 SCREW 9 M 16119 8.0 2-1/4" .099 SCREW 9 M 16120 8.0 2-1/4" .113 SCREW 6.75 M 16197 8.0 2-1/4" .113 SCREW 9 M 16141 8.0 2-1/4" .113 SMOOTH 4.5 M 16239 8.0 2-3/8" .113 RING 3 M 16535 8.0 2-3/8" .113 RING 4.5 M 16198	6.8	2-1/4"	.090	RING	9 M	16190
8.0 2-1/4" .099 SCREW 9 M 16120 8.0 2-1/4" .113 SCREW 6.75 M 16197 8.0 2-1/4" .113 SCREW 9 M 16141 8.0 2-1/4" .113 SMOOTH 4.5 M 16239 8.0 2-3/8" .113 RING 3 M 16535 8.0 2-3/8" .113 RING 4.5 M 16198	8.0	2-1/4"	.099	RING	9 M	13101
8.0 2-1/4" .113 SCREW 6.75 M 16197 8.0 2-1/4" .113 SCREW 9 M 16141 8.0 2-1/4" .113 SMOOTH 4.5 M 16239 8.0 2-3/8" .113 RING 3 M 16535 8.0 2-3/8" .113 RING 4.5 M 16198	8.0	2-1/4"	.099	SCREW	9 M	16119
8.0 2-1/4" .113 SCREW 9 M 16141 8.0 2-1/4" .113 SMOOTH 4.5 M 16239 8.0 2-3/8" .113 RING 3 M 16535 8.0 2-3/8" .113 RING 4.5 M 16198	8.0	2-1/4"	.099	SCREW	9 M	16120
8.0 2-1/4" .113 SMOOTH 4.5 M 16239 8.0 2-3/8" .113 RING 3 M 16535 8.0 2-3/8" .113 RING 4.5 M 16198	8.0	2-1/4"	.113	SCREW	6.75 M	16197
8.0 2-1/4" .113 SMOOTH 4.5 M 16239 8.0 2-3/8" .113 RING 3 M 16535 8.0 2-3/8" .113 RING 4.5 M 16198	8.0	2-1/4"	.113	SCREW	9 M	16141
8.0 2-3/8" .113 RING 3 M 16535 8.0 2-3/8" .113 RING 4.5 M 16198	8.0	2-1/4"		SMOOTH	4.5 M	16239
	8.0		.113	RING	3 M	16535
						16198
	8.0					16177
8.0 2-3/8" .113 SMOOTH 5 M 16240	8.0					

	BRIGHT (Cont.)					
Ditala	1				Dowt No.	
Pitch	Length	Dia	Shank	QTY	Part No.	
8.0	2-1/2"	.099	RING	9 M	16132	
8.0	2-1/2"	.099	SCREW	9 M	16128	
8.0	2-1/2"	.099	SCREW	9 M	16125	
8.0	2-1/2"	.113	SCREW	6 M	16138	
8.0	2-1/2"	.113	SCREW	6 M	16237	
8.0	2-1/2"	.131	RING	4.5 M	16444	
8.0	2-1/2"	.131	SCREW	4.5 M	16431	
8.0	2-1/2"	.131	SMOOTH	4.2 M	14162	
8.0	2-1/2"	.131	SMOOTH	4.5 M	16439	
8.0	2-1/2"	.131	SMOOTH	5.6 M	14113	
8.0	2-1/2"	.148	SMOOTH	4 M	16454	
8.0	2-3/4"	.099	SCREW	5 M	16254	
8.0	2-3/4"	.099	SCREW	5 M	16251	
8.0	2-3/4"	.113	RING	4.5 M	16522	
8.0	2-3/4"	.113	RING	6.75 M	16903	
8.0	2-3/4"	.113	SCREW	4.5 M	16453	
8.0	2-3/4"	.120	RING	4.5 M	16250	
8.0	2-3/4"	.120	RING	4.5 M	19772	
8.0	2-3/4"	.120	SCREW	4.5 M	16246	
8.0	3"	.113	SCREW	5 M	16255	
8.0	3"	.113	SCREW	5.4 M	48715	
8.0	3"	.120	RING	4 M	16262	
8.0	3"	.120	RING	4.5 M	16451	
8.0	3"	.120	RING	4.5 M	16227	
8.0	3"	.120	SCREW	4 M	16170	
8.0	3"	.120	SCREW	4.5 M	16169	
8.0	3"	.120	SMOOTH	2.5 M	16450	
8.0	3"	.120	SMOOTH	4.5 M	16153	
8.0	3"	.131	SMOOTH	2.5 M	16460	
8.0	3"	.131	SMOOTH	4.2 M	16263	
8.0	3"	.131	SMOOTH	4.5 M	16260	
8.0	3"	.135	RING	4.5 M	16277	
8.0	3"	.135	SMOOTH	4.5 M	16280	
8.0	3-1/4"	.120	SCREW	4.5 M	16462	
8.0	3-1/4"	.120	SMOOTH	4 M	16164	
8.0	3-1/4"	.131	SMOOTH	4 M	16474	
8.0	3-1/2"	.120	SCREW	2.5 M	19778	
8.0	3-1/2"	.131	SCREW	2.5 M	16471	
8.0	3-1/2"	.131	SCREW	4 M	16525	
8.0	4"	.131	SCREW	4.5 M	13096	
8.0	4"	.131	SMOOTH	3 M	16825	
8.0	4"	.131	SMOOTH	3 M	16825	

ELECTRO GALVANIZED						
Pitch	Length	Dia	Shank	QTY	Part No.	
6.8	1-3/4"	.086	SCREW	10.5 M	16285	
8.0	1-3/4"	.099	SCREW	9 M	16234	
8.0	2"	.099	SCREW	9 M	16527	
8.0	2-1/4"	.099	SCREW	9 M	16163	
8.0	2-3/8"	.113	RING	4.5 M	16249	
8.0	2-3/8"	.113	RING	5 M	16134	
8.0	2-3/8"	.113	SMOOTH	3 M	16442	
8.0	2-3/8"	.113	SMOOTH	5 M	16268	
8.0	2-1/2"	.099	SCREW	9 M	16287	
8.0	2-1/2"	.131	RING	4 M	16229	
8.0	2-1/2"	.131	RING	4.5 M	16235	
8.0	2-1/2"	.131	SCREW	4.5 M	16283	
8.0	2-1/2"	.131	SMOOTH	4.5 M	16113	
8.0	2-3/4"	.099	SCREW	5 M	16284	
8.0	2-3/4"	.113	SCREW	4.5 M	16282	
8.0	3"	.113	SCREW	5 M	16281	
8.0	3"	.120	RING	4.5 M	16286	
8.0	3"	.120	RING	4.5 M	16201	
8.0	3"	.120	SCREW	4.5 M	16193	
8.0	3"	.120	SMOOTH	4.5 M	16180	
8.0	3"	.131	SMOOTH	4.5 M	16289	
8.0	3-1/4"	.120	SMOOTH	4 M	16288	
8.0	3-1/4"	.131	SMOOTH	4 M	16478	
8.0	3-1/2"	.131	RING	4.5 M	13100	

These Interchange PRO nails are designed to fit most brands of tools.

Interchange PRO HWCF and MWCL nails are used for siding, fencing, decking, shingles, subflooring, pallets and crafting.



	EL	ECTRO	GALVA	NIZED	
Pitch	Length	Dia	Shank	QTY	Part No.
6.8	1-1/2"	.083	RING	16 M	16064
6.8	1-3/4"	.083	RING	16 M	16089
6.8	1-3/4"	.083	RING	16 M	16076
6.8	1-3/4"	.086	RING	10.5 M	16084
6.8	1-3/4"	.090	RING	9 M	14683
8.0	1-3/4"	.092	RING	3.6 M	16066
6.8	1-3/4"	.092	RING	3.6 M	16906
8.0	1-3/4"	.092	RING	9 M	16727
8.0	1-3/4"	.099	RING	9 M	16220
8.0	1-3/4"	.099	SMOOTH	9 M	16518
6.8	2"	.086	RING	10.5 M	13098
8.0	2"	.092	RING	3.6 M	16747
8.0	2"	.092	RING	9 M	16771
8.0	2"	.092	SMOOTH	3.6 M	16735
8.0	2"	.092	SMOOTH	9 M	16748
8.0	2"	.099	RING	1 M	16276
8.0	2"	.099	RING	9 M	16114
6.8	2-1/4"	.090	RING	9 M	16749
8.0	2-1/4"	.092	RING	3.6 M	16764
6.8	2-1/4"	.092	RING	3.6 M	16905
8.0	2-1/4"	.092	SMOOTH	3.6 M	16753
8.0	2-1/4"	.092	SMOOTH	9 M	16760
8.0	2-3/8"	.099	RING	9 M	16127
8.0	2-3/8"	.099	SMOOTH	9 M	16130

HWCF Listing Continued on Next Page ...

Fasteners

Collated Nails

BRIGHT

Uncoated Steel Finish. Ideal for indoor projects. Complies with ASTM F1667 Standards.

ELECTRO GALVANIZED

Limited Corrosion Protection. Ideal for both Indoor & Light Outdoor use. Complies with ASTM F1667 & A641 Standards.

ELECTRO GALVANIZED

Limited Corrosion Protection. Ideal for both Indoor & Light Outdoor use. Complies with ASTM F1667 & A641 Standards.

24 Interchange Pro www.Interchange-Pro.com 25



.092

.113

.092

2-1/4"

2-3/8"

2-1/2"

8.0

8.0

Collated Nails

Fasteners

	STAINLESS STEEL - 304							
Pitch	Length	Dia	Shank	QTY	Part No.			
6.8	1-1/2"	.092	RING	1 M	16898			
8.0	1-1/2"	.092	RING	3.6 M	16723			
6.8	1-3/4"	.083	RING	3.6 M	80314			
8.0	1-3/4"	.092	RING	3.6 M	16733			
8.0	1-3/4"	.099	RING	9 M	16513			
8.0	2"	.092	RING	3.6 M	19107			
8.0	2-1/4"	.092	RING	3.6 M	16768			
8.0	2-1/2"	.092	RING	3.6 M	16762			

SMOOTH

RING

RING

3.6 M

4 M

3.6 M

16761

16211

16770

STAINLESS STEEL - 316							
Pitch	Length	Dia	Shank	QTY	Part No.		
6.8	1-3/4"	.086	RING	3.6 M	16232		
8.0	2"	.099	RING	3.6 M	16233		
6.8	2-1/4"	.090	RING	3.6 M	16231		



CN565-15 PRO Siding Nailer Part No. 65765 See Page 10

	HOT GALVANIZED (Cont.)							
Pitch	Length	Dia	Shank	Qty	Part No.			
8.0	2-1/2"	.131	RING	4.5 M	16228			
8.0	2-1/2"	.131	SMOOTH	4.5 M	16135			
8.0	3"	.120	RING	4 M	16179			
8.0	3"	.120	RING	4.5 M	16257			
8.0	3"	.120	SCREW	4 M	16458			
8.0	3"	.120	SCREW	4.5 M	16256			
8.0	3"	.120	SMOOTH	2.5 M	16195			
8.0	3"	.131	RING	4.5 M	14279			
8.0	3"	.131	SCREW	4 M	14277			
8.0	3"	.131	SMOOTH	4.2 M	14278			
8.0	3"	.131	SMOOTH	4.5 M	16265			
8.0	3-1/4"	.131	RING	2.5 M	16491			
8.0	3-1/4"	.131	SMOOTH	4 M	16464			
8.0	3-1/2"	.131	RING	4.5 M	13116			

These Interchange PRO nails are designed to fit most brands of tools.

Interchange PRO HWCF and MWCL nails are used for siding, fencing, decking, shingles, subflooring, pallets and crafting.

The coating on Hot Galvanized nails could be hot dipped zinc, hot dipped wire zinc or thermal diffused zinc. All hot galvanized nails comply with ASTM A153 standards.



	BRIGHT							
Length	Dia	Shank	QTY	Part No.				
1-1/4"	.083	RING	14 M	16729				
1-1/2"	.099	SCREW	9 M	16786				
1-5/8"	.099	SMOOTH	9 M	13094				
1-3/4"	.086	RING	4.5 M	16772				
1-3/4"	.086	SCREW	9 M	16779				
1-3/4"	.099	SCREW	9 M	16788				
1-3/4"	.099	SCREW	9 M	16789				
2"	.099	RING	8.4 M	16811				
2"	.099	RING	9 M	16793				
2"	.099	SCREW	9 M	16795				
2"	.099	SCREW	9 M	16790				
2"	.113	SMOOTH	7.5 M	19766				
2-1/4"	.099	RING	9 M	16801				
2-1/4"	.099	SCREW	9 M	16792				
2-3/8"	.113	RING	5 M	13092				
2-1/2"	.099	RING	9 M	16904				
2-1/2"	.099	SCREW	9 M	16807				
2-1/2"	.113	RING	5 M	16802				
2-1/2"	.131	RING	5 M	16808				
2-1/2"	.131	SMOOTH	4.5 M	18355				
2-3/4"	.120	RING	4 M	16901				
2-3/4"	.131	SMOOTH	5 M	16812				
3"	.120	RING	4 M	16815				
3"	.120	SCREW	4.5 M	16813				
3-1/4"	.131	SMOOTH	4 M	16820				
3-1/2"	.131	RING	4.5 M	13097				

	HOT GALVANIZED							
Length	Dia	Shank	QTY	Part No.				
1-1/2"	.090	RING	14 M	16731				
1-3/4"	.090	RING	9 M	16777				
2-1/2"	.131	RING	5 M	13090				
2-1/2"	.131	SMOOTH	4 M	16804				
2-3/4"	.131	SMOOTH	5 M	16814				
3"	.131	RING	4 M	13107				
3"	.148	SMOOTH	3 M	13089				
3-1/4"	.131	SMOOTH	4 M	16824				
3-1/4"	.131	SMOOTH	5 M	13088				

STAINLESS STEEL - 304				
Length	Dia	Shank	QTY	Part No.
1-1/2"	.086	RING	16 M	16717
1-1/2"	.092	RING	9 M	16778



BRIGHT

Uncoated Steel Finish. Ideal for indoor projects. Complies with ASTM F1667 Standards.

ELECTRO GALVANIZED

Limited Corrosion Protection. Ideal for both Indoor & Light Outdoor use. Complies with ASTM F1667 & A641 Standards.

ELECTRO GALVANIZED

Limited Corrosion Protection.
Ideal for both Indoor & Light Outdoor use.
Complies with ASTM F1667 & A641 Standards.

HOT GALVANIZED

High Corrosion Protection - ACQ Approved. Ideal for outdoor & high-moisture environments. Complies with ASTM F1667 & A153 Standards.

STAINLESS STEEL

High Corrosion Protection - ACQ Approved. Ideal for outdoor & high-moisture environments. Ideal for use in Cedar, Redwood and Treated Lumber.

ALUMINUM

High Corrosion Protection.
Ideal for specialty exterior projects.
Do not use in treated lumber.

Collated Nails

Fasteners

MPC

15° Round Head - Plastic Sheet Collated Nails





DPC

0° Round Head Plastic Sheet Collated Nails



ELECTRO GALVANIZED				
Length	Dia	Shank	QTY	Part No.
1-7/8"	.099	SMOOTH	6 M	16849

ELECTRO GALVANIZED				
Length	Dia	Shank	QTY	Part No.
2-1/4"	.092	SMOOTH	4.8 M	16858

HOT GALVANIZED					
Length	Dia	Shank	QTY	Part No.	
1-3/4"	.092	RING	6 M	16862	
2"	.092	RING	6 M	16847	
2"	.092	SMOOTH	6 M	16846	
2-1/4"	.092	RING	4.8 M	16861	
2-1/4"	.092	SMOOTH	4.8 M	16860	
2-1/2"	.092	RING	4.8 M	16880	
2-1/2"	.092	SMOOTH	4.8 M	16878	

STAINLESS STEEL - 304					
Lengt	th	Dia	Shank	QTY	Part No.
2"		.092	RING	6 M	16864

These Interchange PRO nails are designed to fit most brands of tools. Interchange PRO MPC nails are used for siding, fencing, shingle and decking applications.





BRIGHT					
Length	Dia	Shank	QTY	Part No.	
1-1/2"	.105	SMOOTH	10.8 M	14006	
2"	.099	SCREW	9 M	14020	
2-1/4"	.099	SCREW	7.2 M	14032	
4-1/2"	.148	SMOOTH	1.8 M	14045	
5"	.148	SMOOTH	1.8 M	14036	

ELECTRO GALVANIZED				
Length	Dia	Shank	QTY	Part No.
1-3/4"	.092	RING	10.8 M	16838
1-7/8"	.092	RING	9 M	14009
1-7/8"	.092	SMOOTH	9 M	14008
2-1/4"	.092	RING	7.2 M	14048
2-1/4"	.092	SMOOTH	7.2 M	14047
2-1/4"	.099	RING	7.2 M	14034


HOT GALVANIZED					
Length	Dia	Shank	QTY	Part No.	
1-7/8"	.086	RING	3.6 M	14016	
2-1/4"	.092	SMOOTH	3.6 M	14033	
2-1/2"	.092	SMOOTH	4 M	14049	

STAINLESS STEEL - 304					
Length	Dia	Shank	QTY	Part No.	
1-7/8"	.086	RING	3.6 M	14018	
1-7/8"	.099	RING	7.2 M	14011	
2-1/4"	.099	RING	7.2 M	14012	

These Interchange PRO nails are designed to fit most brands of tools. Interchange PRO DPC nails are used for siding, fencing, shingle and decking applications.



CN565-0 PRO Siding Nailer Part No. 65770 See Page 10



BRIGHT

Uncoated Steel Finish. Ideal for indoor projects. Complies with ASTM F1667 Standards.

ELECTRO GALVANIZED

Limited Corrosion Protection. Ideal for both Indoor & Light Outdoor use. Complies with ASTM F1667 & A641 Standards.

ELECTRO GALVANIZED

Limited Corrosion Protection.
Ideal for both Indoor & Light Outdoor use.
Complies with ASTM F1667 & A641 Standards.

HOT GALVANIZED

High Corrosion Protection - ACQ Approved. Ideal for outdoor & high-moisture environments. Complies with ASTM F1667 & A153 Standards.

STAINLESS STEEL

High Corrosion Protection - ACQ Approved. Ideal for outdoor & high-moisture environments. Ideal for use in Cedar, Redwood and Treated Lumber.

ALUMINUM

High Corrosion Protection. Ideal for specialty exterior projects. Do not use in treated lumber.

28 Interchange Pro www.Interchange-Pro.com 29

Collated Nails

Fasteners

HOT GALVANIZED				
Length	Dia	Shank	QTY	Part No.
1-3/4"	.086	SCREW	12.8 M	52033
1-7/8"	.086	RING	12.8 M	52024

STAINLESS STEEL - 304				
Length	Dia	Shank	QTY	Part No.
1-7/8"	.086	RING	12.8 M	52023

These Interchange PRO nails are designed to fit most brands of tools. Interchange PRO DPRC nails are used for siding, fencing, shingle and decking applications.



CN50-20 PRO Plastic Coil Nailer Part No. 65781 See Page 10



BRIGHT

Uncoated Steel Finish. Ideal for indoor projects. Complies with ASTM F1667 Standards.

ELECTRO GALVANIZED

Limited Corrosion Protection. Ideal for both Indoor & Light Outdoor use. Complies with ASTM F1667 & A641 Standards.

ELECTRO GALVANIZED

Limited Corrosion Protection. Ideal for both Indoor & Light Outdoor use. Complies with ASTM F1667 & A641 Standards.

HOT GALVANIZED

High Corrosion Protection - ACQ Approved. Ideal for outdoor & high-moisture environments. Complies with ASTM F1667 & A153 Standards.

STAINLESS STEEL

High Corrosion Protection - ACQ Approved. Ideal for outdoor & high-moisture environments. Ideal for use in Cedar, Redwood and Treated Lumber.

ALUMINUM

High Corrosion Protection. Ideal for specialty exterior projects. Do not use in treated lumber.



HOT GALVANIZED					
Length	Dia	Shank	QTY	Part No.	
3/4"	.120	SMOOTH	7.2 M	16006	
7/8"	.120	SMOOTH	7.2 M	19104	
1"	.120	SMOOTH	7.2 M	16021	
1-1/4"	.120	RING	7.2 M	16036	
1-1/4"	.120	SMOOTH	7.2 M	16031	
1-1/2"	.120	RING	7.2 M	16039	
1-1/2"	.120	SMOOTH	7.2 M	16041	
1-3/4"	.120	RING	7.2 M	16049	
1-3/4"	.120	SMOOTH	7.2 M	16051	
1-3/4"	.120	SMOOTH	7.2 M	16046	

STAINLESS STEEL - 304					
Length	Dia	Shank	QTY	Part No.	
3/4"	.120	RING	7.2 M	19106	
7/8"	.120	RING	7.2 M	16529	
1"	.120	RING	7.2 M	16530	
1-1/4"	.120	RING	7.2 M	16037	
1-1/2"	.120	RING	7.2 M	16533	
1-3/4"	.120	RING	3.6 M	16045	
1-3/4"	.120	RING	7.2 M	16534	

Interchange PRO CR nails are used for asphalt and fiberglass shingles, roofing felt, foam and fiberboard sheathing and installation board.

The coating on Hot Galvanized nails could be hot dipped zinc, hot dipped wire zinc or thermal diffused zinc. All hot galvanized nails comply with ASTM A153 standards.





Bulk Nails

Fasteners

ELECTRO GALVANIZED					
Length	Gauge	POINT	QTY	Part No.	
1-1/2"	15ga	CHISEL	3.5 M	22040	
2"	15ga	CHISEL	3.5 M	22060	
2-1/4"	15ga	CHISEL	3.5 M	22070	
2-1/2"	15ga	CHISEL	3.5 M	22080	
2-1/2"	15ga	CHISEL	5 M	22170	

These Interchange PRO fasteners are designed to fit most brands of tools.



BRIGHT					
Length	Gauge	POINT	QTY	Part No.	
1"	15ga	CHISEL	4 M	22115	
1-1/4"	15ga	CHISEL	4 M	22125	
1-1/4"	15ga	CHISEL	4 M	24110 *	
1-1/2"	15ga	CHISEL	4 M	22135	
1-1/2"	15ga	CHISEL	4 M	24115 *	
1-3/4"	15ga	CHISEL	4 M	22145	
2"	15ga	CHISEL	4 M	22155	
2"	15ga	CHISEL	4 M	24130 *	
2-1/4"	15ga	CHISEL	4 M	22165	
2-1/2"	15ga	CHISEL	4 M	22175	
2-1/2"	15ga	CHISEL	4 M	24145 *	

ELECTRO GALVANIZED					
Length	Gauge	POINT	QTY	Part No.	
1-1/2"	15ga	CHISEL	4 M	22136	
1-3/4"	15ga	CHISEL	4 M	22146	
2"	15ga	CHISEL	4 M	22156	
2"	15ga	CHISEL	4 M	24135 *	
2-1/2"	15ga	CHISEL	4 M	22176	
2-1/2"	15ga	CHISEL	4 M	24150 *	

STAINLESS STEEL - 304					
Length	Gauge	POINT	QTY	Part No.	
2"	15ga	CHISEL	4 M	22163	
2-1/2"	15ga	CHISEL	4 M	22177	

* Industrial Fasteners feature a higher tensile strength

ELECTRO GALVANIZED						
Length	Gauge	POINT	QTY	Part No.		
7/8"	16ga	CHISEL	2.5 M	21207		
1"	16ga	CHISEL	2.5 M	21211		
1-1/4"	16ga	CHISEL	2.5 M	21231		
1-1/2"	16ga	CHISEL	2.5 M	21241		
1-3/4"	16ga	CHISEL	2.5 M	21251		
2"	16ga	CHISEL	2.5 M	21261		
2-1/4"	16ga	CHISEL	2.5 M	21271		
2-1/2"	16ga	CHISEL	2.5 M	21281		
3"	16ga	CHISEL	2.5 M	21206		

STAINLESS STEEL - 304					
Length	Gauge	POINT	QTY	Part No.	
2"	16ga	CHISEL	2.5 M	21262	
2-1/2"	16ga	CHISEL	2.5 M	21282	

BRIGHT

Uncoated Steel Finish. Ideal for indoor projects. Complies with ASTM F1667 Standards.

ELECTRO GALVANIZED

Limited Corrosion Protection. Ideal for both indoor and light outdoor use. Complies with ASTM F1667 & A641 Standards.

STAINLESS STEEL

High corrosion protection - ACQ Approved. Ideal for outdoor & high-moisture environments. Ideal for use in Cedar, Redwood and Treated Lumber.

ELECTRO GALVANIZED					
Length	Gauge	POINT	QTY	Part No.	
1/2"	23ga	DIAMOND	10 M	23220 *	
5/8"	23ga	DIAMOND	10 M	23225 *	
3/4"	23ga	DIAMOND	10 M	23219 *	
1"	23ga	DIAMOND	10 M	23234 *	
1-3/16"	23ga	DIAMOND	10 M	23235 *	
1-1/4"	23ga	DIAMOND	10 M	23236 *	
1-3/8"	23ga	DIAMOND	10 M	23238 *	

* Industrial Fasteners feature a higher tensile strength







32 33 Interchange Pro www.Interchange-Pro.com

Fasteners

Fasteners

PX Finish Nails

Finish Nails

PX/PY/PZ

18 Gauge Medium Head Brads

ELECTRO GALVANIZED					
Length	Gauge	POINT	QTY	Part No.	
1/2"	18ga	CHISEL	5 M	23110	
5/8"	18ga	CHISEL	5 M	23120	
3/4"	18ga	CHISEL	5 M	23130	
3/4"	18ga	CHISEL	5 M	22213	
7/8"	18ga	CHISEL	5 M	23140	
1"	18ga	CHISEL	5 M	23150	
1-3/16"	18ga	CHISEL	5 M	23160	
1-1/4"	18ga	CHISEL	5 M	23170	
1-1/2"	18ga	CHISEL	5 M	23180	
1-5/8"	18ga	CHISEL	5 M	23188	
1-3/4"	18ga	CHISEL	5 M	23190	
2"	18ga	CHISEL	5 M	23195	



PY Finish Nails

18 Gauge Slight Head Brads

ELECTRO GALVANIZED					
Length	Gauge	POINT	QTY	Part No.	
5/8"	18ga	CHISEL	5 M	23020	
3/4"	18ga	CHISEL	5 M	23030	
1"	18ga	CHISEL	5 M	23050	

PZ Finish Nails

18 Gauge Headless Pins

ELECTRO GALVANIZED					
	Length	Gauge	POINT	QTY	Part No.
	1/2"	18ga	CHISEL	5 M	23200 *

^{*} Industrial Fasteners feature a higher tensile strength

These Interchange PRO nails are designed to fit most brands of tools



Explore our full line of products, sell sheets and more on your desktop or mobile devices!



Get our flyers & more digitally!

Scan the QR code.



www.Interchange-Pro.com 1-800-745-6735.



BRIGHT

Uncoated Steel Finish. Ideal for indoor projects. Complies with ASTM F1667 Standards.

ELECTRO GALVANIZED

Limited Corrosion Protection. Ideal for both indoor and light outdoor use. Complies with ASTM F1667 & A641 Standards.

STAINLESS STEEL

High corrosion protection - ACQ Approved. Ideal for outdoor & high-moisture environments. Ideal for use in Cedar, Redwood and Treated Lumber.





A Series

22 Gauge - 3/16" Crown 1/4" - 1/2" Leg

Length	Crown	POINT	QTY	Part No.
3/8"	3/16"	CHISEL	10 M	30007



B Series

22 Gauge - 1/2" Crown 1/4" - 1/2" Leg

Length	Crown	POINT	QTY	Part No.
1/4"	1/2"	CHISEL	10 M	30018
3/8"	1/2"	CHISEL	10 M	30020
1/2"	1/2"	CHISEL	10 M	30030



Fasteners Collated Staples

C Series

22 Gauge - 3/8" Crown 5/32" - 5/8" Leg



Length	Crown	POINT	QTY	Part No.
3/16"	3/8"	CHISEL	10 M	30305
1/4"	3/8"	CHISEL	10 M	30306
3/8"	3/8"	CHISEL	10 M	30309
1/2"	3/8"	CHISEL	10 M	30312
1/2"	3/8"	CHISEL	20 M	47376
9/16"	3/8"	CHISEL	10 M	30314
5/8"	3/8"	CHISEL	10 M	30316
5/8"	3/8"	CHISEL	12 M	47377
5/8"	3/8"	CHISEL	12 M	47374

Fine Wire Staples 20 - 22 Gauge



D Series

22 Gauge - 3/16" Crown 5/8" Leg

Length	Crown	POINT	QTY	Part No.
5/8"	3/16"	CHISEL	10 M	30015



F Series

20 Gauge - 1/2" Crown 1/4" - 1/2" Leg

Length	Crown	POINT	QTY	Part No.
1/4"	1/2"	CHISEL	5 M	30405
3/8"	1/2"	CHISEL	5 M	30409
1/2"	1/2"	CHISEL	5 M	30412



G Series

20 Gauge - 3/8" Crown 1/2" Leg

Length	Crown	POINT	QTY	Part No.
1/2"	3/8"	CHISEL	5 M	30065



5400 Series

20 Gauge - 3/16" Crown 1/2" Leg

Length	Crown	POINT	QTY	Part No.
3/8"	3/16"	CHISEL	5 M	30609
9/16"	3/16"	DIVER- GENT	5 M	30614

These Interchange PRO staples are designed to fit most brands of tools.

Interchange PRO Fine Wire Staples are used for screening, light trim, mouldings, picture frames, cabinet backing, weather stripping, insulation, roofing felt, upholstery, building paper and carpet and pad.

ELECTRO GALVANIZED

Limited Corrosion Protection.
Ideal for both indoor & light outdoor use.
Complies with ASTM F1667 & A641 Standards.

STAINLESS STEEL

High Corrosion Protection - ACQ Approved. Ideal for outdoor & high moisture environments. Ideal for use in Cedar, Redwood and Treated Lumber.

Part No.

32416

32405

32411

32415

32417

32420


32422

32425

32430

Medium Wire Staples

18 - 19 Gauge



Medium Wire Staples

18 - 19 Gauge



J Series

18 Gauge - 7/16" Crown 3/8" - 5/8" Leq

ELECTRO GALVANIZED				
Length	Crown	POINT	QTY	Part No.
5/8"	7/16"	CHISEL	5 M	30075



K Series

19 Gauge - 1/4" Crown 3/4" Leg

ELECTRO GALVANIZED				
Length	Crown	POINT	QTY	Part No.
5/8"	1/4"	CHISEL	5 M	30040



Fasteners Collated Staples

L Series

18 Gauge - 1/4" Crown 3/8" - 1-1/2" Leg



SL150 PRO Narrow Crown Sta	nler
Part No. 65777	p.o.
See Page 11	

ELECTRO GALVANIZED				
Length	Crown	POINT	QTY	Part No.
3/8"	1/4"	CHISEL	5 M	32302
1/2"	1/4"	CHISEL	5 M	32305
1/2"	1/4"	CHISEL	5 M	32261 *
5/8"	1/4"	CHISEL	5 M	32263 *
5/8"	1/4"	CHISEL	5 M	32310
3/4"	1/4"	CHISEL	5 M	32264 *
3/4"	1/4"	CHISEL	5 M	32320
7/8"	1/4"	CHISEL	5 M	32265 *
7/8"	1/4"	CHISEL	5 M	32330
1"	1/4"	CHISEL	5 M	32340
1"	1/4"	CHISEL	5 M	32266 *
1-1/8"	1/4"	CHISEL	5 M	32267 *
1-1/8"	1/4"	CHISEL	5 M	32345
1-1/4"	1/4"	CHISEL	5 M	32268 *
1-1/4"	1/4"	CHISEL	5 M	32350
1-3/8"	1/4"	CHISEL	5 M	30207
1-1/2"	1/4"	CHISEL	5 M	32270 *
1-1/2"	1/4"	CHISEL	5 M	32360

^{*} Industrial Fasteners feature a higher tensile strength



M Series

18 Gauge - 3/8" Crown 3/8" - 1-1/2" Leg



SM125LN PRO

Medium Crown Stapler Part No. 65780

See Page 11

18 _{GA}	
NARROW CROWN STAPLE	

GSN Series

18 Gauge - 3/16" Crown 5/8" - 1-1/2" Leg

ELECTRO GALVANIZED						
Length	Crown	POINT	QTY	Part No.		
5/8"	3/16"	CHISEL	5 M	32110		
3/4"	3/16"	CHISEL	5 M	32120		
7/8"	3/16"	CHISEL	5 M	32130		
1"	3/16"	CHISEL	5 M	32140		
1-1/8"	3/16"	CHISEL	5 M	32145		
1-1/4"	3/16"	CHISEL	5 M	32150		
1-1/2"	3/16"	CHISEL	5 M	32160		

ELECTRO GALVANIZED POINT

CHISEL

CHISEL

CHISEL

CHISEL

CHISEL

CHISEL

CHISEL

CHISEL

CHISEL

Length

3/8"

1/2"

5/8"

3/4"

7/8"

1"

1-1/8"

1-1/4"

1-1/2"

Crown

3/8"

3/8"

3/8"

3/8"

3/8"

3/8"

3/8"

3/8"

3/8"

QTY

5 M

5 M

5 M

5 M

5 M

5 M

5 M



SX Series

18 Gauge - 7/32" Crown 5/8" - 1-3/8" Leq

	ELECTRO GALVANIZED					
Length	Crown	POINT	QTY	Part No.		
5/8"	7/32"	CHISEL	5 M	30210		
3/4"	7/32"	CHISEL	5 M	30220		
7/8"	7/32"	CHISEL	5 M	30230		
1"	7/32"	CHISEL	5 M	30240		
1-1/8"	7/32"	CHISEL	3 M	30245		
1-3/16"	7/32"	CHISEL	3 M	30248		
1-1/4"	7/32"	CHISEL	3 M	30249		
1-3/8"	7/32"	CHISEL	3 M	30251		

ELECTRO GALVANIZED

Limited Corrosion Protection. Ideal for both indoor & light outdoor use. Complies with ASTM F1667 & A641 Standards.

STAINLESS STEEL

High Corrosion Protection - ACQ Approved Ideal for outdoor & high moisture environments. Ideal for use in Cedar, Redwood and Treated Lumber.

These Interchange PRO staples are designed to fit most brands of tools. Interchange PRO Medium Wire Staples are used for cabinet building, underlayment, mouldings, aluminum and steel siding, soffit and fascia.

38 **Interchange Pro** www.Interchange-Pro.com





N Series

16 Gauge - 7/16" Crown 3/8" - 2" Leq

STAINLESS STEEL - 304					
Length	Crown	POINT	QTY	Part No.	
1-1/4"	7/16"	CHISEL	10 M	34252	
1-1/2"	7/16"	CHISEL	10 M	34262	
1-3/4"	7/16"	CHISEL	10 M	34272	
2"	7/16"	CHISEL	10 M	34282	



SN5016 PRO

Medium **Crown Stapler** Part No. 65771

See Page 11

ELI	ECTRO G	ALVANIZ	ED	
Length	Crown	POINT	QTY	Part No.
1"	7/16"	CHISEL	10 M	34241
1"	7/16"	DIVER- GENT POINT	10 M	34343
1/2"	7/16"	CHISEL	10 M	34220
1-1/2"	7/16"	CHISEL	10 M	34261
1-1/4"	7/16"	CHISEL	10 M	34251
1-1/8"	7/16"	CHISEL	10 M	34246
1-3/4"	7/16"	CHISEL	10 M	34271
1-3/8"	7/16"	CHISEL	10 M	34256
2"	7/16"	CHISEL	10 M	34281
3/4"	7/16"	CHISEL	10 M	34228
3/4"	7/16"	CHISEL	10 M	34229
5/8"	7/16"	CHISEL	10 M	34227
7/8"	7/16"	CHISEL	10 M	34232



Fasteners Collated Staples

P Series

16 Gauge - 1" Crown 3/8" - 2" Leg



SP4016 PR0

Wide **Crown Stapler** Part No. 65772

See Page 11

ELECTRO GALVANIZED					
Length	Crown	POINT	QTY	Part No.	
5/8"	1"	CHISEL	10 M	36211	
3/4"	1"	CHISEL	10 M	36221	
7/8"	1"	CHISEL	10 M	36231	
1"	1"	CHISEL	10 M	36241	
1-1/4"	1"	CHISEL	10 M	36251	
1-1/4"	1"	CHISEL	10 M	36252	
1-1/2"	1"	CHISEL	10 M	36262	
1-1/2"	1"	CHISEL	10 M	36263 *	
1-3/4"	1"	CHISEL	5 M	36270	
2"	1"	CHISEL	5 M	36280	

^{*} Industrial Fasteners feature a higher tensile strength



Q Series

15 Gauge - 7/16" Crown 1-1/4" - 2-1/2" Leg

ELECTRO GALVANIZED					
Length	Crown	POINT	QTY	Part No.	
1-1/4"	7/16"	CHISEL	5 M	38255	
1-1/2"	7/16"	CHISEL	5 M	38260	
1-3/4"	7/16"	CHISEL	5 M	38270	
2"	7/16"	CHISEL	5 M	38280	
2-1/2"	7/16"	CHISEL	5 M	38290	

Heavy Wire Staples



BCS Wide Crown

16 Gauge - 1" Crown 3/4" - 2" Leq

ELECTRO GALVANIZED				
Length	Crown	POINT	QTY	Part No.
5/8"	1"	CHISEL	10 M	36016
3/4"	1"	CHISEL	10 M	36019
7/8"	1"	CHISEL	10 M	36021
1"	1"	CHISEL	10 M	36025
1-1/4"	1"	CHISEL	10 M	36033
1-1/2"	1"	CHISEL	10 M	36039
1-3/4"	1"	CHISEL	10 M	36045
2"	1"	CHISEL	5 M	36050



BCS Med Crown

16 Gauge - 1/2" Crown 1" - 2" Leg

ELECTRO GALVANIZED					
Length	Crown	POINT	QTY	Part No.	
1"	1/2"	CHISEL	10 M	34441	
1-1/4"	1/2"	CHISEL	10 M	34451	
1-1/2"	1/2"	CHISEL	10 M	34461	
1-3/4"	1/2"	CHISEL	10 M	34471	
2"	1/2"	CHISEL	10 M	34481	



BCS-FS Series

15 Gauge - 1/2" Crown 1-1/2" - 2" Leg

These Interchange PRO staples are designed to fit most brands of tools.

Interchange PRO Heavy Wire Staples are used for cedar and shake shingles;

subflooring; wall sheathing; roof decking; aluminum, steel and composition

ELECTRO GALVANIZED					
Length	Crown	POINT	QTY	Part No.	
1-1/2"	1/2"	CHISEL	9.66 M	38165	
2"	1/2"	CHISEL	7.72 M	38185	

ELECTRO GALVANIZED

Limited Corrosion Protection. Ideal for both indoor & light outdoor use. Complies with ASTM F1667 & A641 Standards.

STAINLESS STEEL

High Corrosion Protection - ACQ Approved. Ideal for outdoor & high moisture environments. Ideal for use in Cedar, Redwood and Treated Lumber.



siding; lathing; bridging; component assembly and fencing.

BRIGHT				
Length	Crown	POINT	Qty	Part No.
2"			5 M	25300

Interchange Pro www.Interchange-Pro.com 41

Heavy Wire Staples







GS16 Series

16 Gauge - 1/2" Crown 3/4" - 2" Leq

ELECTRO GALVANIZED					
Length	Crown	POINT	QTY	Part No.	
3/4"	1/2"	CHISEL	10 M	34135	
1"	1/2"	CHISEL	10 M	34141	
1-1/4"	1/2"	CHISEL	10 M	34151	
1-1/2"	1/2"	CHISEL	10 M	34161	
1-3/4"	1/2"	CHISEL	10 M	34171	
2"	1/2"	CHISEL	10 M	34181	

STAINLESS STEEL - 304					
Length	Crown	POINT	QTY	Part No.	
1-1/4"	1/2"	CHISEL	10 M	34152	
1-1/2"	1/2"	CHISEL	10 M	34162	
1-3/4"	1/2"	CHISEL	10 M	34172	
2"	1/2"	CHISEL	1 M	34182	



GSW 14 Ga

14 Gauge - 15/16" Crown 7/8" Leg

ELECTRO GALVANIZED					
Length	Crown	POINT	QTY	Part No.	
7/8"	15/16"	CHISEL	10 M	25167	
7/8"	15/16"	CHISEL	5 M	36105	



GSW 16 Ga

16 Gauge - 15/16" Crown 5/8" - 2" Leg

ELECTRO GALVANIZED							
Length	Crown	POINT	QTY	Part No.			
5/8"	15/16"	CHISEL	10 M	36100			
7/8"	15/16"	CHISEL	10 M	36121			
1"	15/16"	CHISEL	10 M	36125			
1-1/4"	15/16"	CHISEL	10 M	36133			
1-1/2"	15/16"	CHISEL	10 M	36137			
1-3/4"	15/16"	CHISEL	5 M	36144			
2"	15/16"	CHISEL	10 M	36180			
2"	15/16"	CHISEL	5 M	36150			



7600 Series

16 Gauge - 7/16" Crown 1" - 2" Leg

ELECTRO GALVANIZED								
Length	ength Crown POINT QTY Part No							
1"	7/16"	CHISEL	10 M	34341				
1-1/4"	7/16"	CHISEL	10 M	34351				
1-1/2"	7/16"	CHISEL	10 M	34361				
1-3/4"	7/16"	CHISEL	10 M	34371				
2"	7/16"	CHISEL	10 M	34381				



5000 Series

20 Gauge - 1/2" Crown 1/4" - 9/16" Lea

	ELECTRO GALVANIZED								
Length	Crown	POINT	QTY	Part No.					
1/4"	1/2"	CHISEL	5 M	30810					
5/16"	1/2"	CHISEL	5 M	30820					
5/16"	1/2"	CHISEL	5 M	30821					
3/8"	1/2"	CHISEL	5 M	30830					
1/2"	1/2"	CHISEL	5 M	30835					
9/16"	1/2"	CHISEL	5 M	30840					



A11 Series

20 Gauge - 3/8" Crown 1/4" - 9/16" Leq

ELECTRO GALVANIZED								
Length	Crown	POINT	QTY	Part No.				
1/4"	3/8"	CHISEL	5 M	30516				
5/16"	3/8"	CHISEL	5 M	30517				
3/8"	3/8"	CHISEL	5 M	30519				
1/2"	3/8"	CHISEL	5 M	30521				
9/16"	3/8"	CHISEL	5 M	30523				



A19 Series

23 Gauge - 3/8" Crown 1/4" Leg

ELECTRO GALVANIZED							
Length Crown POINT QTY Part No.							
1/4"	3/8"	CHISEL	5 M	30506			
CTAINLECC CTEEL 204							

STAINLESS STEEL - 304							
Length	Crown	POINT	QTY	Part No.			
1/4"	3/8"	CHISEL	5 M	30019			



SHCR Series

20 Gauge - 3/8" Crown 3/8" Leg

ELECTRO GALVANIZED							
Length	Crown	POINT	QTY	Part No.			
1/4"	3/8"	CHISEL	5 M	30719			
3/8"	3/8"	CHISEL	5 M	30710			
3/8"	3/8"	CHISEL	5 M	30720			
9/16"	3/8"	CHISEL	5 M	30730			



STCR Series

20-23 Gauge - 3/8" Crown 1/4" - 9/16" Leq

ELECTRO GALVANIZED							
Length Crown POINT QTY Part No.							
5/16"	7/16"	CHISEL	5 M	30716			

These Interchange PRO staples are designed to fit most brands of tools.



ELECTRO GALVANIZED

Limited Corrosion Protection. Ideal for both indoor & light outdoor use. Complies with ASTM F1667 & A641 Standards.

STAINLESS STEEL

High Corrosion Protection - ACQ Approved. Ideal for outdoor & high moisture environments. Ideal for use in Cedar, Redwood and Treated Lumber.

ACQ APPROVED

1 в & 5 в Bulk Nails

Bright / Vinyl Ideal for indoor projects. Excellent holding ower & a clean finish for framing, carpentry and woodworking

Electro Galvanized Ideal for both indoor & light outdoor use. Ensuring strength & protection with its added corrosion resistance coating

Hot Galvanized Ideal for outdoor & high-moisture environments. Durable & rust-resistant, ACQ Approved

Interchange Pro nails are made from premium-grade steel and engineered for superior performance and durability. Ideal for framing, finishing and specialty applications.

ACQ APPROVED

ACQ APPROVED

Ideal for attaching trim and finishing work with a concealed head. High corrosion protection. Recommended for treated lumber.

CASING NAILS Avaliable in

FINISH NAILS

Avaliable in

1 њ

1 lb

Bulk Nails

Ideal for attaching case molding for windows or doors. High corrosion protection. Recommended for treat lumber.

Ideal for attaching trim and finishing work with a concealed

head. Not suggested for treated lumber or exterior projects.

COMMON **NAILS** Avaliable in 1 в 5 в

Ideal for framing and general construction. Not suggested for

Ideal for framing and general construction. High corrosion protection. Recommended for treated lumber.

BOX **NAILS** Avaliable in 1 в 5 в

Bright

Ideal for light duty construction such as boxes and crates. Not suggested for treated lumber or exterior projects.

Ideal for light duty construction such as boxes and crates. High corrosion protection. Recommended for treated lumber.

SINKER **NAILS** Avaliable in 1 в 5 в

Ideal for framing, carpentry and general construction. Not suggested for treated lumber or exterior projects.

DUPLEX NAILS Avaliable in

Bright

For temporary structures such as scaffolds and framework. Not suggested for treated lumber or exterior projects.

1 в 5 в JOIST HANGER NAILS 1 в 5 в

Ideal for attaching joist hangers to wood framework. Not suggested for treated lumber or exterior projects.

ACQ APPROVED

Ideal for attaching trim and finishing work with a concealed head. High corrosion protection. Recommended for treated

Get our flyer digitally! Scan the QR code.






SOLD IN RECLOSABLE **COMPACT BOXES**

1 в & 5 в Bulk Nails

Bright / Vinyl Ideal for indoor projects. Excellent holding ower & a clean finish for framing, carpentry and woodworking.

Electro Galvanized Ideal for both Indoor & light outdoor use.
Ensuring strength & protection with its added corrosion resistance coating

Hot Galvanized Ideal for outdoor & high-moisture environments. Durable & rust-resistant. ACQ Approved

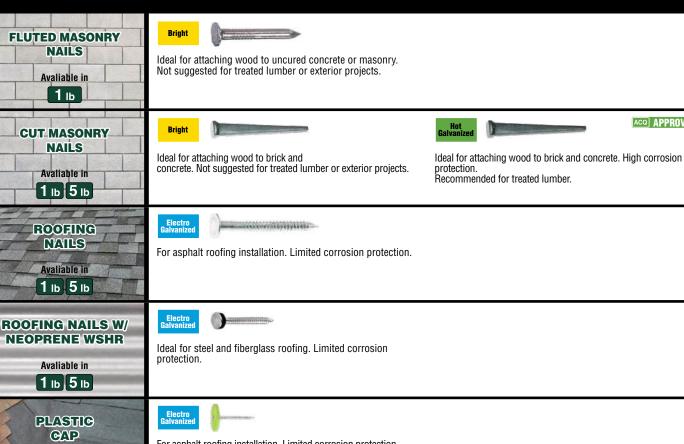

For asphalt roofing installation. Limited corrosion protection.

UNDERLAYMENT NAILS Avaliable in 1 њ

Avaliable in

1 lb

Ideal for fastening plywood or composition underlayment over existing subfloor. Not suggested for treated lumber or exterior projects

ACQ APPROVED



Ideal for patio and deck construction. High corrosion protection. Recommended for treated lumber.

POLE BARN NAILS Avaliable in 1 в 5 в

Ideal for load-bearing, wood framed structures where high holding strength is necessary. Not suggested fro treated lumber or exterior projects.

Interchange Pro www.Interchange-Pro.com 45

1 lb & 5 lb Bulk Nails

Interchange Pro nails are made from premium-grade steel and engineered for superior performance and durability. Ideal for framing, finishing and specialty applications.

Bulk Nails

Fasteners

Bright / Vinyl Ideal for indoor projects. Excellent holding power & a clean finish for framing, carpentry and woodworking.

Electro Galvanized Ideal for both Indoor & light outdoor use.
Ensuring strength & protection with its added corrosion resistance coating.

Hot Galvanized Ideal for outdoor & high-moisture environments. Durable & rust-resistant. ACQ Approved

1 в & 5 в Bulk Nails

Electro Galvanized Ideal for both indoor & light outdoor use.

Ensuring strength & protection with its added corrosion resistance coating

Hot Galvanized Ideal for outdoor & high-moisture environments. Durable & rust-resistant. ACQ Approved

Length Penny Shank Finish Manf No - 11b Manf No - 51b Box 807 amount bright	BOX NAILS																		
2-1/2" 8D 3-1/4" 12D 3-1/4	Length	Penny	Shank	Finish	Manf No - 1lb	Manf No - 5lb	Description												
3° 100	2"	6D			N/A	45121	Box 6D 2In Smooth Bright												
3-1/4" 120 3-1/2" 160 2" 60 45127 N/A Box 120 3.25in Smooth Bright	2-1/2"	8D			45124	N/A	Box 8D 2.5In Smooth Bright												
3-1/2" 16D 2-1/2" 8D 3-1/3" 12D 45129 N/A Box 16D 3.5in Smooth Bright	3"	10D		Bright	45126	N/A	Box 10D 3In Smooth Bright												
2" 60	3-1/4"	12D			45127	N/A	Box 12D 3.25In Smooth Bright												
2-1/2" 8D	3-1/2"	16D	SMOOTH		45129	N/A	Box 16D 3.5In Smooth Bright												
3-1/4" 12D 3-1/2" 16D	2"	6D			45123	45381	Box 6D 2In Smooth Hot Galvanized												
3-1/2" 120	2-1/2"	8D		Hat Calmaninad	45125	45382	Box 8D 2.5In Smooth Hot Galvanized												
Casing Nall	3-1/4"	12D		HOL GAIVANIZEO	45128	N/A	Box 12D 3.25In Smooth Hot Galvanized												
Length	3-1/2"	16D			45130	45378	Box 16D 3.5In Smooth Hot Galvanized												
2" 60					CASING NA	LS													
2-1/2" 8D SMOOTH Hol Galvanized 45142 N/A Casing 8D 2.5in Smooth Hol Galvanized 45144 Casing 16D 3.5in Smooth Hol Galvanized	Length	Penny	Shank	Finish	Manf No - 1lb	Manf No - 5lb	Description												
3-1/2" 16D	2"	6D			45141		Casing 6D 2In Smooth Hot Galvanized												
Common Nation	2-1/2"	8D	SM00TH	Hot Galvanized	45142	N/A	Casing 8D 2.5In Smooth Hot Galvanized												
Length	3-1/2"	16D			45144		Casing 16D 3.5In Smooth Hot Galvanized												
2" 6D 2-1/2" 8D 3" 10D 3-1/4" 12D 3-1/2" 8D 45095 45096 45103 Common 6D 2.5 in Smooth Bright 45106 45107 Common 10D 3 in Smooth Bright 45111 45112 Common 10D 3 in Smooth Bright 45111 45112 Common 12D 3.25 in Smooth Bright 45106 45107 Common 12D 3.25 in Smooth Bright 45111 45112 Common 12D 3.25 in Smooth Bright 45106 45115 45116 Common 16D 3.5 in Smooth Bright 45107 Common 16D 3.5 in Smooth Bright 45107 Common 16D 3.5 in Smooth Bright 45107 Common 16D 3.5 in Smooth Hot Galvanized 45108 45109 Common 6D 2.1 in Smooth Hot Galvanized 45108 45109 Common 10D 3 in Smooth Hot Galvanized 45113 45114 Common 12D 3.25 in Smooth Hot Galvanized 45117 45119 Common 10D 3.5 in Smooth Hot Galvanized 45117 45119 Common 16D 3.5 in Smooth Hot Galvanized 45117 45119 Common 16D 3.5 in Smooth Hot Galvanized 45117 45119 Common 16D 3.5 in Smooth Hot Galvanized 45117 45119 Common 16D 3.5 in Smooth Hot Galvanized 45117 45119 Common 16D 3.5 in Smooth Hot Galvanized 45117 45119 Common 16D 3.5 in Smooth Hot Galvanized 45117 45119 Common 16D 3.5 in Smooth Hot Galvanized 45117 45119 Common 16D 3.5 in Smooth Hot Galvanized 45117 45119 Common 16D 3.5 in Smooth Hot Galvanized 45117 45119 Common 16D 3.5 in Smooth Hot Galvanized 45217 45205 45384 Cut Masonry 4D 1.5 in Bright 45205					COMMON NA	ILS													
2-1/2" 8D 3" 10D 3-1/4" 12D 3-1/2" 8D 45106 45107 Common 10D 3in Smooth Bright 45106 45107 Common 12D 3.25in Smooth Bright 45111 45112 Common 12D 3.25in Smooth Bright 45115 45116 Common 16D 3.5in Smooth Bright 45107 Common 12D 3.25in Smooth Bright 45115 45116 Common 16D 3.5in Smooth Bright 45107 Common 16D 3.5in Smooth Bright 45107 Common 16D 3.5in Smooth Bright 45116 Common 16D 3.5in Smooth Hot Galvanized 45108 45109 Common 8D 2.5in Smooth Hot Galvanized 45108 45109 Common 10D 3in Smooth Hot Galvanized 45113 45114 Common 12D 3.25in Smooth Hot Galvanized 45117 45119 Common 16D 3.5in Smooth Hot Galvanized 45111 45119 Common 16D 3.5in Smooth Hot Galvanized 45110 Common 16D 3.5in Smooth Hot Galvanized 45108 A5209 A5209 A5209 Common 16D 3.5in Smooth Hot Galvanized 452014 A5205 A5384 Cut Masonry 4D 1.5in Bright 45205 A5384 Cut Masonry 4D 1.5in Bright 45205 A5384 Cut Masonry 8D 2.5in Bright 45205 A5209 Cut Masonry 8D 2.5in Hot Galvanized 45207 A5209 Cut Masonry 8D 2.5in Hot Galvanized 45207 A5209 Cut Masonry 8D 2.5in Bright 45209 Cut Masonry 8D 2.5in B	Length	Penny	Shank	Finish	Manf No - 1lb	Manf No - 5lb	Description												
3" 10D 3-1/4" 12D 3-1/2" 16D 2" 6D 2-1/2" 8D 3-1/4" 12D 3-1/4" 12D 45105 45115 45116 Common 12D 3.25in Smooth Bright 45097 45099 Common 6D 2in Smooth Hot Galvanized 45104 45105 Common 8D 2.5in Smooth Hot Galvanized 45108 45109 Common 12D 3.25in Smooth Hot Galvanized 45108 45109 Common 12D 3.25in Smooth Hot Galvanized 45113 45114 Common 12D 3.25in Smooth Hot Galvanized 45117 45119 Common 12D 3.25in Smooth Hot Galvanized 45217 45205 45384 Cut Masonry 4D 1.5in Bright 45205 45384 Cut Masonry 8D 2.5in Bright 45203 45239 Cut Masonry 8D 2.5in Hot Galvanized 45237 45239 Cut Masonry 8D 2.5in Hot Galvanized 45237 45239 Cut Masonry 8D 2.5in Hot Galvanized 45410 45411 Drywall 13ga 1.375in Smooth Phosphate 45416 45413 Drywall 13ga 1.625in Smooth Phosphate 45416 4	2"	6D			45095	45096	Common 6D 2In Smooth Bright												
3-1/4" 12D 3-1/4" 16D 2" 6D 2-1/2" 8D 3-1/4" 12D 45097 45099 Common 6D 2In Smooth Bright 45104 45105 Common 12D 3.25In Smooth Hot Galvanized 45104 45105 Common 12D 3.25In Smooth Hot Galvanized 45108 45109 Common 12D 3.25In Smooth Hot Galvanized 45108 45109 Common 12D 3.25In Smooth Hot Galvanized 45113 45114 Common 12D 3.25In Smooth Hot Galvanized 45117 45119 Common 12D 3.25In Smooth Hot Galvanized 45117 45119 Common 16D 3.5In Smooth Hot Galvanized 45118 Cut Masonry 4D 1.5in Bright 45204 N/A Cut Masonry 4D 1.5in Bright 45205 45384 Cut Masonry 8D 2.5in Bright 45205 45384 Cut Masonry 8D 2.5in Bright 45205 45384 Cut Masonry 8D 2.5in Hot Galvanized 45217 45239 Cut Masonry 8D 2.5in Hot Galvanized 45218 Cut Masonry 8D 2.5in Hot Galvanized 45218 Cut Masonry 8D 2.5in Hot Galvanized 45418 Cut Masonry 8D 2.5in Hot Galvanized 45416 45413 Drywall 13ga 1.375in Smooth Phosphate 45416 45413 Drywall 13ga 1.625in Smooth Phosphate 45416 45413 Drywall 13ga 1.625in Smooth Phosphate 45416 45413 Drywall 13ga 1.625in Smooth Phosphate 45416 45418	2-1/2"	8D		Bright	45102	45103	Common 8D 2.5In Smooth Bright												
3-1/2" 16D 2-1/2" 8D 2-1/2" 8D 3-1/4" 12D 45104 45105 Common 16D 3.5in Smooth Hot Galvanized 45104 45105 Common 10D 3in Smooth Hot Galvanized 45108 45113 45114 Common 12D 3.25in Smooth Hot Galvanized 45113 45114 Common 12D 3.25in Smooth Hot Galvanized 45117 45119 Common 16D 3.5in Smooth Hot Galvanized 45217 45119 Common 16D 3.5in Smooth Hot Galvanized 45204 N/A Cut Masonry 4D 1.5in Bright 45204 N/A Cut Masonry 4D 1.5in Bright 45205 45384 Cut Masonry 8D 2.5in Bright 45205 45384 Cut Masonry 8D 2.5in Bright 45205 45384 Cut Masonry 8D 2.5in Hot Galvanized 45237 45239 Cut Masonry 8D 2.5in Hot Galvanized 45237 45239 Cut Masonry 8D 2.5in Hot Galvanized 45410 45411 Drywall 13ga 1.375in Smooth Phosphate 45416 45413 Drywall 13ga 1.625in Smooth Phosphate 45416 45416 45413 45416	3"	10D			45106	45107	Common 10D 3In Smooth Bright												
2" 6D 2-1/2" 8D 3" 10D 45104 45105 Common 6D 2In Smooth Hot Galvanized 45108 45109 Common 1D 3In Smooth Hot Galvanized 45108 45109 Common 1D 3In Smooth Hot Galvanized 45113 45114 Common 12D 3.25In Smooth Hot Galvanized 45113 45114 Common 12D 3.25In Smooth Hot Galvanized 45117 45119 Common 1D 3In Smooth Hot Galvanized 45117 45119 Common 1D 3In Smooth Hot Galvanized 45117 45119 Common 1D 3In Smooth Hot Galvanized 45117 45119 Common 1D 3.5In Smooth Hot Galvanized 45217 45204 N/A Cut Masonry 4D 1.5in Bright 45205 45384 Cut Masonry 4D 1.5in Bright 45205 45384 Cut Masonry 8D 2.5in Bright 45207 45239 Cut Masonry 8D 2.5in Hot Galvanized 45217 45239 Cut Masonry 8D 2.5in Hot Galvanized 45218 A5239 Cut Masonry 8D 2.5in Hot Galvanized 45239 Cut Masonry 8D 2.5in	3-1/4"	12D			45111	45112	Common 12D 3.25In Smooth Bright												
2" 6D 2-1/2" 8D 45097 45099 Common 6D 2In Smooth Hot Galvanized 45104 45105 Common 8D 2.5In Smooth Hot Galvanized 45108 45109 Common 1D 3In Smooth Hot Galvanized 45113 45114 Common 12D 3.25In Smooth Hot Galvanized 45117 45119 Common 1ED 3.5In Smooth Hot Galvanized 45118 Cut Masonry 4D 1.5In Bright 45204 N/A Cut Masonry 4D 1.5In Bright 45205 45384 Cut Masonry 4D 1.5In Bright 45205 45384 Cut Masonry 8D 2.5In Bright 45205 45384 Cut Masonry 8D 2.5In Bright 45205 45239 Cut Masonry 8D 2.5In Hot Galvanized 45237 45239 Cut Masonry 8D 2.5In	3-1/2"	16D	SMOOTH	SMOOTH	SMOOTH	SMOOTH	SMOOTH	SMOOTH	SMOOTH	SMOOTH	SMOOTH	SMOOTH	SMOOTH	SMOOTH	SMOOTH		45115	45116	Common 16D 3.5In Smooth Bright
3" 10D 3.1/4" 12D 45113 45114 Common 12D 3.25In Smooth Hot Galvanized 45113 45114 Common 12D 3.25In Smooth Hot Galvanized 45117 45119 Common 16D 3.5In Smooth Hot Galvanized 45117 Manf No - 5Ib Description 45112 45119 Common 16D 3.5In Smooth Hot Galvanized 45117 45119 Common 16D 3.5In Smooth Hot Galvanized 45119 Common 16D 3.5In Smooth Hot Galvanized 45112 Cut Masonry 8D 2.5In Bright 45210 45219 Cut Masonry 8D 2.5In Bright 45219 Cut Masonry 8D 2.5In Hot Galvanized 45219 Cut Masonry 8D	2"	6D														SIVIUUITI	SINOUTH	Omoulli	Omoulli
3-1/4" 12D 45113 45114 Common 12D 3.25In Smooth Hot Galvanized 45117 45119 Common 16D 3.5In Smooth Hot Galvanized 45117 45119 Common 16D 3.5In Smooth Hot Galvanized	2-1/2"	8D			45104	45105	Common 8D 2.5In Smooth Hot Galvanized												
3-1/2" 16D	3"	10D		Hot Galvanized	45108	45109	Common 10D 3In Smooth Hot Galvanized												
CUT MASONRY NAILS	3-1/4"	12D															45113	45114	Common 12D 3.25In Smooth Hot Galvanized
Length Penny Shank Coating Manf No - 1lb Manf No - 5lb Description 1-1/2" 4D 4D 4D 45204 N/A Cut Masonry 4D 1.5in Bright 2-1/2" 8D N/A 45205 45384 Cut Masonry 8D 2.5in Bright 2-1/2" 8D Hot Galvanized 45237 45239 Cut Masonry 8D 2.5in Hot Galvanized DRYWALL NAILS Length Gauge Shank Coating Manf No - 1lb Manf No - 5lb Description 1-3/8" 13ga 300TH Phosphate 45410 45411 Drywall 13ga 1.375in Smooth Phosphate 1-5/8" 13ga 45416 45413 Drywall 13ga 1.625in Smooth Phosphate DUPLEX NAILS Length Penny Shank Coating Manf No - 1lb Manf No - 5lb Description	3-1/2"	16D			45117	45119	Common 16D 3.5In Smooth Hot Galvanized												
1-1/2" 4D					CUT MASONRY	NAILS													
2-1/2" 8D	Length	Penny	Shank	Coating	Manf No - 1lb	Manf No - 5lb	Description												
2-1/2" 8D	1-1/2"	4D		Rright	45204	N/A	Cut Masonry 4D 1.5in Bright												
Length Gauge Shank Coating Manf No - 1lb Manf No - 5lb Description 1-3/8" 13ga 3000TH Phosphate 45410 45411 Drywall 13ga 1.375in Smooth Phosphate 1-5/8" 13ga 45416 45413 Drywall 13ga 1.625in Smooth Phosphate DUPLEX NAILS Length Penny Shank Coating Manf No - 1lb Manf No - 5lb Description	2-1/2"	8D	N/A	Driyiit	45205	45384	Cut Masonry 8D 2.5in Bright												
Length Gauge Shank Coating Manf No - 1lb Manf No - 5lb Description 1-3/8" 13ga SMOOTH Phosphate 45410 45411 Drywall 13ga 1.375in Smooth Phosphate 1-5/8" 13ga 45416 45413 Drywall 13ga 1.625in Smooth Phosphate DUPLEX NAILS Length Penny Shank Coating Manf No - 1lb Manf No - 5lb Description	2-1/2"	8D		Hot Galvanized	45237	45239	Cut Masonry 8D 2.5in Hot Galvanized												
1-3/8" 13ga SMOOTH Phosphate 45410 45411 Drywall 13ga 1.375in Smooth Phosphate 1-5/8" 13ga 45416 45413 Drywall 13ga 1.625in Smooth Phosphate DUPLEX NAILS Length Penny Shank Coating Manf No - 1lb Manf No - 5lb Description					DRYWALL NA	ILS													
1-5/8" 13ga SMOOTH Phosphate 45416 45413 Drywall 13ga 1.625in Smooth Phosphate DUPLEX NAILS Length Penny Shank Coating Manf No - 1lb Manf No - 5lb Description	Length	Gauge	Shank	Coating	Manf No - 1lb	Manf No - 5lb	Description												
1-5/8" 13ga 45416 45413 Drywall 13ga 1.625in Smooth Phosphate DUPLEX NAILS Length Penny Shank Coating Manf No - 1lb Manf No - 5lb Description	1-3/8"	13ga	СМООТП	Phoenhata	45410	45411	Drywall 13ga 1.375in Smooth Phosphate												
Length Penny Shank Coating Manf No - 1lb Manf No - 5lb Description	1-5/8"	13ga	SINIUUIT	riiospiiate	45416	45413	Drywall 13ga 1.625in Smooth Phosphate												
					DUPLEX NA	LS													
	Length	Penny	Shank	Coating	Manf No - 1lb	Manf No - 5lb	Description												
2-1/4" 8D SMOOTH Bright 45145 45146 Duplex 8D 2.25in Smooth Bright	2-1/4"	8D	смооти	Rright	45145	45146	Duplex 8D 2.25in Smooth Bright												
3" 16D SMOOTH Bright 45149 45152 Duplex 16D 3in Smooth Bright	3"	16D	SINIUUIT	Dilylit	45149	45152	Duplex 16D 3in Smooth Bright												

Length	Penny/ Diameter	Shank	Coating	Manf No - 1lb	Manf No - 5lb	Description						
FENCE STAPLES												
Length	Gauge	Shank	Coating	Manf No - 1lb	Manf No - 5lb	Description						
1-1/4"	9ga		Hot Galvanized	45206	N/A	Fence Staples 9ga 1.25in Hot Galvanized						
1-1/2"	9ga		Hot dalvallized	45207	N/A	Fence Staples 9ga 1.5in Hot Galvanized						
				FINISH NAI	LS							
Length	Penny	Shank	Coating	Manf No - 1lb	Manf No - 5lb	Description						
1-1/4"	3D			45159		Finish 3D 1.25in Smooth Bright						
1-1/2"	4D			45162		Finish 4D 1.5in Smooth Bright						
2"	6D		Deinki	45164		Finish 6D 2in Smooth Bright						
2-1/2"	8D		Bright	45166		Finish 6D 2in Smooth Bright						
3"	10D			45169		Finish 10D 3in Smooth Bright						
3-1/2"	16D	01400711		45172	N/A	Finish 16D 3.5in Smooth Bright						
1-1/4"	3D	SMOOTH		45161	N/A	Finish 3D 1.25in Smooth Hot Galvanized						
1-1/2"	4D			45163		Finish 4D 1.5in Smooth Hot Galvanized						
2"	6D			45165		Finish 6D 2in Smooth Hot Galvanized						
2-1/2"	8D		Hot Galvanized	45167		Finish 8D 2.5in Smooth Hot Galvanized						
3"	10D			45171		Finish 10D 3in Smooth Hot Galvanized						
3-1/2"	16D			45173		Finish 16D 3.5in Smooth Hot Galvanized						
FLUTED MASONRY NAILS												
Length	Diameter	Shank	Coating	Manf No - 1lb	Manf No - 5lb	Description						
3/4"				45193		Fluted Masonry Nails 1in Fluted Bright						
1"				45195		Fluted Masonry Nails 1.5in Fluted Bright						
1-1/4"		FLUTED		45196		Fluted Masonry Nails 1.25in Fluted Bright						
1-1/2"	N/A		Bright 4519	45197	N/A	Fluted Masonry Nails 2in Fluted Bright						
2"	,			45198		Fluted Masonry Nails 2.5in Fluted Bright						
2-1/2"											45199	
3"				45203		Fluted Masonry Nails 0.75in Fluted Bright						
				JOIST HANGER	NAILS							
Length	Gauge	Shank	Coating	Manf No - 1lb	Manf No - 5lb	Description						
1-1/2"	9ga			45153	45154	Joist Hanger 9ga 1.5in Smooth Bright						
2-1/2"	8ga	01100	Bright	N/A	45383	Joist Hanger 8ga 2.5in Smooth Bright						
1-1/2"	9ga	SMOOTH		45155	45156	Joist Hanger 9ga 1.5in Smooth Hot Galvanized						
2-1/2"	8ga		Hot Galvanized 45157 45158		Joist Hanger 8ga 2.5in Smooth Hot Galvanized							
				PATIO AND DECK								
Length	Penny	Shank	Coating	Manf No - 1lb	Manf No - 5lb	Description						
2"	6D	RING		45213		Patio/Deck 6D 2in Ring Hot Galvanized						
2"	6D	SCREW		45209		Patio/Deck 6D 2in Screw Hot Galvanized						
2-1/2"	8D	RING		45215		Patio/Deck 8D 2.5in Ring Hot Galvanized						
2-1/2"	8D	SCREW	Hot Galvanized	45214	N/A	Patio/Deck 8D 2.5in Screw Hot Galvanized						
3-1/4"	12D	RING		45216		Patio/Deck 16D 3.5in Ring Hot Galvanized						
3-1/2"	16D	RING		45219		Patio/Deck 16D 3.5in Screw Hot Galvanized						
3-1/2"	16D	SCREW		45217		Patio/Deck 12D 3.25in Ring Hot Galvanized						

46 Interchange Pro www.Interchange-Pro.com 47

Interchange Pro nails are made from premium-grade steel and engineered for superior performance and durability. Ideal for framing, finishing and specialty applications.

Coating

Coating

Penny/

Gauge

Length

Bulk Nails

Fasteners

Hot Galvanized Ideal for outdoor & high-moisture environments. Durable & rust-resistant. ACQ Approved

Electro Galvanized Ideal for both indoor & light outdoor use. Ensuring strength & protection with its added corrosion resistance coating.

Description

Description

Electro Galvanized Ideal for both Indoor & light outdoor use.
Ensuring strength & protection with its added corrosion resistance coating

Hot Galvanized Ideal for outdoor & high-moisture environments. Durable & rust-resistant. ACQ Approved







1"	12ga			45189		Plastic Cap 12ga 1in Ring Electro Galvanized		
1-1/2"	12ga	RING	Electro Galvanized	45191	N/A	Plastic Cap 12ga 1.5in Ring Electro Galvanized		
2"	12ga			45192		Plastic Cap 12ga 2in Ring Electro Galvanized		
POLE BARN NAILS								
Length	Penny	Shank	Coating	Manf No - 1lb	Manf No - 5lb	Description		
2-1/2"	8D			45233	N/A	Pole Barn 8D 2.5in Ring Bright		
3"	10D	RING	Bright	N/A	45235	Pole Barn 10D 3in Ring Bright		
3-1/2"	16D			N/A	45236	Pole Barn 16D 3.5in Ring Bright		
				POULTRY NET S	TAPLES			
Length	Diameter	Shank	Coating	Manf No - 1lb	Manf No - 5lb	Description		
3/4"	N/A	N/A	Hot Galvanized	45221	N/A	Poultry Net Staples 0.75in Hot Galvanized		
				ROOFING NA	ILS			
Length	Gauge	Shank	Coating	Manf No - 1lb	Manf No - 5lb	Description		
3/4"	11ga			45174	45331	Roofing 11ga 0.75in Smooth Electro Galvanized		
7/8"	11ga			45328	45332	Roofing 11ga 0.875in Smooth Electro Galvanized		
1"	11ga	SMOOTH		45175	45176	Roofing 11ga 1in Smooth Electro Galvanized		
1-1/4"	11ga	SMOOTH		45177	45179	Roofing 11ga 1.25in Smooth Electro Galvanized		
1-1/2"	11ga			45180	45333	Roofing 11ga 1.5in Smooth Electro Galvanized		
1-3/4"	11ga		Electro Galvanized	45181	45183	Roofing 11ga 1.75in Smooth Electro Galvanized		
1-3/4"	10ga	RING		45240	45241	Roofing 10ga 1.75in Ring Electro Galvanized w/NEOPRENE WASHER		
2"	11ga			45184	N/A	Roofing 11ga 2in Ring Electro Galvanized		
2"	11ga			45186	45187	Roofing 11ga 2in Smooth Electro Galvanized		
2-1/2"	11ga	SMOOTH		45329	45334	Roofing 11ga 2.5in Smooth Electro Galvanized		
3"	11ga			45330	45336	Roofing 11ga 3in Smooth Electro Galvanized		
				SINKER NA	ILS			
Length	Penny	Shank	Coating	Manf No - 1lb	Manf No - 5lb	Description		
1-7/8"	6D			45131	45132	Sinker 6D 1.875in Smooth Vinyl		
2-3/8"	8D			45133	45134	Sinker 8D 2.375in Smooth Vinyl		
3-1/8"	12D	SMOOTH	Vinyl	45135	45136	Sinker 16D 3.25in Smooth Vinyl		
3-1/4"	16D			45137	45138	Sinker 12D 3.125in Smooth Vinyl		
3-3/4"	20D			45139	N/A	Sinker 20D 3.75in Smooth Vinyl		
				UNDERLAYMENT	T NAILS			
Length	Gauge	Shank	Coating	Manf No - 1lb	Manf No - 5lb	Description		
1-1/4"	12.5ga	RING	Bright	45230	N/A	Underlayment 12.5ga 1.5in Ring Bright		
1-1/2"	12.5ga	ninu	Driyiit	45231	N/A	Underlayment 12.5ga 1.25in Ring Bright		

Manf No - 1lb

Manf No - 1lb

PLASTIC CAP NAILS

Manf No - 5lb

Manf No - 5lb

NOTES			

50 в Bulk Nails

Bulk Nails

Bright / Vinyl Ideal for indoor projects. Excellent holding power & a clean finish for framing, carpentry and woodworking.

Electro Galvanized Ideal for both indoor & light outdoor use. Ensuring strength & protection with its added corrosion resistance coating.

Interchange Pro nails are made from premium-grade steel and engineered for superior performance and durability. Ideal for framing, finishing and specialty applications.

Hot Galvanized Ideal for outdoor & high-moisture environments. Durable & rust-resistant. ACQ Approved

Ideal for framing and general construction. Not suggested for Ideal for framing and general construction. High corrosion **COMMON NAILS** Ideal for exterior light duty construction. High corrosion protection. Recommended for treated lumber. Ideal for light duty construction such as boxes and crates. Not suggested for treated lumber or exterior projects. **BOX NAILS** For temporary structures such as scaffolds and framework. **DUPLEX NAILS** Ideal for framing, carpentry and general construction. SINKER NAILS For asphalt roofing installation. For asphalt roofing installation. High corrosion protection. **ROOFING NAILS** METAL SQUARE **CAP NAILS** Ideal for fastening underlayment substrates and insulation. Limited corrosion protection ACQ APPROVED Ideal for attaching wood to interior brick and concrete. Not suggested for treated lumber or exterior projects. Ideal for attaching wood to brick and concrete. High corrosion protection. Recommended for treated lumber. **MASONRY NAILS** ACQ APPROVED JOIST HANGER Electro Galvanize Ideal for attaching joist hangers to wood framework. High corrosion protection. Recommended for treated lumber. Ideal for attaching joist hangers to wood framework. Not suggested for treated lumber or exterior projects. NAILS PALLET NAILS Ideal for pallet and crate building. Not suggested for treated lumber or exterior (Machine Grade) For clay roofing tile installation. Limited corrosion protection. ROOFING **TILE NAILS**

50 в Bulk Nails

Length	Penny/Diameter	Shank	Coating	Point	Sort Name	Description
-9119411	<i>ji</i> - iailiotoi	Jana	Journa	BOX NAILS	2314 114/110	
2-1/2"	8D		Electro Galvanized		45005	Box 8D 2-1/2in Smooth Electro Galvanized
3-1/2"	16D	SMOOTH	Libbild dalifallizati	N/A	45000 45245	Box 16D 3-1/2in Smooth Electro Galvanized
2-1/2" 3-1/2"	8D 16D		Hot Galvanized		45245 45003	Box 8D 2-1/2in Smooth Hot Galvanized Box 16D 3-1/2in Smooth Hot Galvanized
<u> </u>				COMMON NAI		50x 102 0 1,2m 0 moon 101 danum 100
2"	6D				45028	Common 6D 2in Smooth Bright
2-1/2"	8D				45032	Common 8D 2-1/2in Smooth Bright
3" 3-1/4"	10D 12D				45017 45019	Common 10D 3in Smooth Bright Common 12D 3-1/4in Smooth Bright
3-1/2"	16D		Bright		45021	Common 16D 3-1/2in Smooth Bright
4"	20D	SM00TH		N/A	45023	Common 20D 4in Smooth Bright
5" 6"	40D 60D				45026 45027	Common 40D 5in Smooth Bright Common 60D 6in Smooth Bright
2"	6D				45031	Common 6D 2in Smooth Hot Galvanized
3"	10D		Hot Galvanized		45018	Common 10D 3in Smooth Hot Galvanized
3-1/2"	16D			CUT MACONDY A	45022	Common 16D 3-1/2in Smooth Hot Galvanized
2-1/2"	8D			CUT MASONRY N	45014	Cut Masonry 8D 2-1/2in Temper Hardened Bright
3"	10D	N /A	Bright	A1 /A	45008	Cut Masonry 10D 3in Temper Hardened Bright
2-1/2"	8D	N/A	Hot Galvanized	N/A	45016	Cut Masonry 8D 2-1/2in Temper Hardened Hot Galvanized
3"	10D		Gu.rumeou	DIIDI EV MATI	45013	Cut Masonry 10D 3in Temper Hardened Hot Galvanized
1-3/4"	6D I			DUPLEX NAIL	45034	Duplex 6D 1-3/4in Smooth Bright
2-1/4"	8D	SMOOTH	Bright	N/A	45034 45035	Duplex 8D 2-1/4in Smooth Bright
3"	16D				45033	Duplex 16D 3in Smooth Bright
				JOIST HANGER		
1-1/2" 1-1/2"	9G 9G		Bright Electro Galvanized		45037 45038	Joist Hanger 1-1/2in 9G Smooth Bright Joist Hanger 1-1/2in 9G Smooth Electro Galvanized
1-1/2"	9G	SMOOTH	Hot Galvanized	N/A	45039	Joist Hanger 1-1/2in 9G Smooth Hot Galvanized
1-1/2"	10G		Bright		45036	Joist Hanger 1-1/2in 10G Smooth Bright
			N	IETAL SQUARE CA		
3/4"					45047	Metal Square Cap 3/4in Ring Electro Galvanized
7/8" 1"					45052 45043	Metal Square Cap 7/8in Ring Electro Galvanized Metal Square Cap 1in Ring Electro Galvanized
1-1/4"					45041	Metal Square Cap 1-1/4in Ring Electro Galvanized
1-3/4"		PING	Floring	N /A	45042	Metal Square Cap 1-3/4in Ring Electro Galvanized
2" 2-1/2"		RING	Electro Galvanized	N/A	45045 45044	Metal Square Cap 2in Ring Electro Galvanized Metal Square Cap 2-1/2in Ring Electro Galvanized
3"					45048	Metal Square Cap 2-1/2111 King Electro Galvanized Metal Square Cap 3in Ring Electro Galvanized
3-1/2"					45046	Metal Square Cap 3-1/2in Ring Electro Galvanized
<u>4"</u> 5"					45049 45051	Metal Square Cap 4in Ring Electro Galvanized Metal Square Cap 5in Ring Electro Galvanized
J				PALLET NAIL		i metai oquale cap oni ning Electro Galvanizeu
1-3/4"	ı			No Point	45053	Pallet 1-3/4in x .113 Screw Bright No Point
1-3/4"				Blunt Diamond Point	45242	Pallet 1-3/4in x .113 Sc Bright Blunt Diamond
1-5/8"	112	SCREW		No Point Blunt Diamond Point	45054	Pallet 1-5/8in x .113 Screw Bright No Point Pallet 2in x .113 Screw Bright Diamond Point
2" 2"	.113	SUNEW		No Point	45066 45067	Pallet 2in x .113 Screw Bright No Point
2-1/4"				Blunt Diamond Point	45055	Pallet 2-1/4in x .113 Screw Bright Diamond Point
2-1/4"			Bright	No Point	45057	Pallet 2-1/4in x .113 Screw Bright No Point
2" 2-1/4"		RING		No Point No Point	45069 45059	Pallet 2in x .120 Ring Bright No Point Pallet 2-1/4in x .120 Ring Bright No Point
2"	400			Diamond Point	45059	Pallet 2 in x .120 Screw Bright Diamond Point
2"	.120	SCREW		No Point	45072	Pallet 2in x .120 Screw Bright No Point
2-1/4" 3"		COLLEG		No Point No Point	45060 45073	Pallet 2-1/4in x .120 Screw Bright No Point Pallet 3in x .120 Screw Bright No Point
J	l			ROOFING NAI		i anet on A . 120 ottew bright NO FUNIL
3/4"	I			JUI ING ITAI	45243	Roofing 3/4in Smooth Electro Galvanized
7/8"					45244	Roofing 7/8in Smooth Electro Galvanized
1"					45077	Roofing 1 in Smooth Electro Galvanized
1-1/4" 1-1/2"			Electro Galvanized		45075 45074	Roofing 1-1/4in Smooth Electro Galvanized Roofing 1-1/2in Smooth Electro Galvanized
1-3/4"	400	CMOOTH	Licotto darvanizoa	NI/A	45076	Roofing 1-3/4in Smooth Electro Galvanized
2"	.120	SMOOTH		N/A	45082	Roofing 2in Smooth Electro Galvanized
2-1/2"					45078 45084	Roofing 2-1/2in Smooth Electro Galvanized
3" 2"					45084 45083	Roofing 3in Smooth Electro Galvanized Roofing 2in Smooth Hot Galvanized
2-1/2"			Hot Galvanized		45081	Roofing 2-1/2in Smooth Hot Galvanized
3"					45085	Roofing 3in Smooth Hot Galvanized
411	r			ROOFING TILE N		In a way a wa
4" 6"	.120	SMOOTH	Electro Galvanized	N/A	45086 45087	Roofing Tile 4in Smooth Electro Galvanized
U				SINKER NAIL	45087	Roofing Tile 6in Smooth Electro Galvanized
1-7/8"	6D			SINKEK NAIL	45092	Sinker 6D 1-7/8in Smooth Vinyl
2-3/8"	8D	SMOOTH	Vinul Coated	N/A	45093	Sinker 8D 2-3/8in Smooth Vinyl
3-1/8"	12D	SMOOTH	Vinyl Coated	N/A	45089	Sinker 12D 3-1/8in Smooth Vinyl
3-1/4"	16D			THE COME W	45090	Sinker 16D 3-1/4in Smooth Vinyl
En I				TURF SPIKE NA		Trust Carilles Ein v. 400 Canacath Daile
5" 6"	.192	SMOOTH	Bright	N/A	45246 45247	Turf Spike 5in x .192 Smooth Bright Turf Spike 6in x .192 Smooth Bright
U					7047	Turr Spino oin x . 132 oinooth bright

50 Interchange Pro www.Interchange-Pro.com 51

Collated Nails

Fasteners

1m Collated Nails

Bright / Vinyl Ideal for indoor projects. Excellent holding ower & a clean finish for framing, carpentry and woodworking

Electro Galvanized Ideal for both indoor & light outdoor use. Ensuring strength & protection with its added corrosion resistance coating

Hot Galvanized Ideal for outdoor & high-moistur environments. Durable & rust-resistant. ACQ Approved

1m Collated Nails

Bright / Vinyl Ideal for indoor projects. Excellent holding power & a clean finish for framing, carpentry and woodworking

Electro Galvanized Ideal for both indoor & light outdoor use.

Hot Galvanized Ideal for outdoor & high-moisture environments. Durable & rust-resistant. ACO Approved

Engineered for efficiency, our collated nails are perfect for highvolume fastening with nail guns. Available in a variety of lengths, angles, and finishes to suit framing, siding, roofing, and finish work. Designed for smooth feeding, strong holds, and reduced jamming. **0° PLASTIC COLLATED ROUND HEAD** Smooth & Ring Shank

PLASTIC COLLATED

ROUND HEAD

15° WIRE COLLATED

ROUND HEAD



Round Head

Siding, Fencing, Sheating, Fiber Cement Board, Soffit







Smooth, Ring & Screw Shank Round Head

Wood-to-Wood Construction, Framing, Decking, Fence Building









Smooth Shank Round Head

Siding, Fencing, Sheating Fiber Cement Board, Soffit



34° PAPER COLLATED



Smooth & Ring Shank Clipped Head

Wood-to-Wood Construction, Framing, Decking, Fence Building








Smooth Shank Round Head

Metal Connector Installation





ROUND HEAD JOIST NAILS







Joist Hanger and





Sort Name | Tub Qty | Pallet Qty 0° DPC Plastic Collated Round Head Siding Nails 1-7/8in x .092 Smooth Shank Electro Galvanized 0° Plastic Fencing Collated Nails 1-7/8in x .092 Ring Shank Electro Galvanized 0° Plastic Fencing Collated Nails .092 **Electro Galvanized** 1-3/4in x.092 Ring Shank Electro Galvanized 15° Wire 8.0 Fencing Collated Nails
1-3/4in x.092 Ring Shank Hot Galvanized 15° Wire 8.0 Fencing Collated Nails
2in x .092 Ring Shank Hot Galvanized 15° Wire 8.0 Fencing Collated Nails
2-3/16in x .092 Ring Shank Hot Galvanized 15° Wire 8.0 Fencing Collated Nails 45372 1-3/4" 45375 45323 Ring 1.200 .092 2-3/16" 2-1/4" 45324 2-1/4in x.092 Ring Shank Electro Galvanized 15° Wire 8.0 Fencing Collated Nails 45374 21° DPS Plastic Collated Round Framing Head Nails 2in x .113 Ring Shank Hot Galvanized 21° Plastic Collated Nails 2" Ring 2-1/4in x .148 Smooth Shank Bright 21° Plastic Collated Nails 2-1/4in x .148 Smooth Shank Hot Galvanized 21° Plastic Collated Nails 2-1/4" Smooth 2-1/4in x . 148 Smooth Shank Hot Galvanized 21° Plastic Collated Nails
2-3/8in x . 113 Smooth Shank Bright 21° Plastic Collated Nails
2-3/8in x . 113 Ring Shank Bright 21° Plastic Collated Nails
2-3/8in x . 148 Ring Shank Bright 21° Plastic Collated Nails
2-3/8in x . 113 Ring Shank Hot Galvanized 21° Plastic Collated Nails
2-1/2in x . 131 Smooth Shank Bright 21° Plastic Collated Nails
2-1/2in x . 148 Smooth Shank Bright 21° Plastic Collated Nails
2-1/2in x . 134 Smooth Shank Bright 21° Plastic Collated Nails Smooth .113 2-3/8" .148 Ring .131 .131 Briaht .148 2-1/2" Smooth 2-1/2in x .131 Smooth Shank Hot Galvanized 21° Plastic Collated Nails .131 3in x .120 Smooth Shank Bright 21° Plastic Collated Nails
3in x .120 Rmooth Shank Bright 21° Plastic Collated Nails
3in x .120 Ring Shank Bright 21° Plastic Collated Nails
3in x .131 Smooth Shank Bright 21° Plastic Collated Nails
3in x .120 Ring Shank Hot Galvanized 21° Plastic Collated Nails
3in x .120 Screw Shank Hot Galvanized 21° Plastic Collated Nails .120 1.000 .131 .120 **Hot Galvanized** 45359 3in x .131 Smooth Shank Hot Galvanized 21° Plastic Collated Nails .131 45299 3in x .131 Ring Shank Hot Galvanized 21° Plastic Collated Nails 3-1/4in x .131 Smooth Shank Bright 21° Plastic Collated Nails 3-1/4in x .148 Smooth Shank Bright 21° Plastic Collated Nails 3-1/4in x .131 Smooth Shank Hot Galvanized 21° Plastic Collated Nails 45290 3-1/4 .131 Smooth 45301 Hot Galvanized 3-1/4in x . 148 Smooth Shank Hot Galvanized 21° Plastic Collated Nails 3-1/2in x . 131 Smooth Shank Bright 21° Plastic Collated Nails 148 3-1/2" 45291 .131 ed Head Framing Nails

2in x .120 Ring Shank Hot Galvanized 34° Paper Collated Nails

2-3/8in x .113 Smooth Shank Bright 34° Paper Collated Nails

2-3/8in x .113 Ring Shank Bright 34° Paper Collated Nails

2-3/8in x .113 Ring Shank Hot Galvanized 34° Paper Collated Nails

3in x .120 Smooth Shank Bright 34° Paper Collated Nails

3in x .120 Ring Shank Bright 34° Paper Collated Nails

3in x .131 Smooth Shank Bright 34° Paper Collated Nails

3in x .131 Ring Shank Bright 34° Paper Collated Nails

3in x .131 Ring Shank Hot Galvanized 34° Paper Collated Nails

3-1/4in x .131 Smooth Shank Bright 34° Paper Collated Nails .120 45313 2-3/8" 113 Ring 45314 1,000 .120 45362 45310 Smooth .131 Ring .120 .131 45315 3-1/4" 45311 34° PTJH Paper Collated Round Head Joist Nails 1-1/2in x .131 Smooth Shank Bright High Carbon 34° Joist Collated Nails 1-1/2in x .148 Smooth Shank Bright 34° Joist Collated Nails 1-1/2in x .131 Smooth Shank Hot Galvanized 34° Joist Collated Nails 1-1/2in x .148 Smooth Shank Hot Galvanized 34° Joist Collated Nails Bright .148 1-1/2" .131 **Hot Galvanized** 1,000 .148 2-1/2in x .148 Smooth Shank Bright High Carbon 34° Joist Collated Nails 2-1/2in x .162 Smooth Shank Bright High Carbon 34° Joist Collated Nails 2-1/2in x .148 Smooth Shank Hot Galvanized 34° Joist Collated Nails Bright .162 2-1/2"



NOTES		

Get our flyer digitally! Scan the QR code.

Interchange Pro nails are made from premium-grade steel and engineered for superior performance and durability. Ideal for framing, finishing and specialty applications.

"DA" STYLE ANGLED NAILS	15 _{GA} ANGLED MAIL.	Electro Galvanized Primary Applications Casing, Trim, Base Moulding and Cabinets		
STRAIGHT FINISH NAILS	16 _{GA}	Electro Galvanized Primary Applications Casing, Finish, Trim, Moulding Baseboard and Cabinets		
20° ANGLED FINISH NAILS	16 _{GA}	Electro Galvanized Primary Applications Casing, Finish, Trim, Moulding Baseboard and Cabinets		
BRAD Nails	18 _{GA} BRAD NAIL	Electro Galvanized Primary Applications Casing, Finish, Trim, Corner Round Moulding Baseboard and Cabinets		
"L" STYLE NARROW NAILS	18 _{GA} NARROW CROWN STAPLE	Electro Galvanized Primary Applications Cabinets, Door Frames, Soffit, Picture Frames		
"N" STYLE MEDIUM NAILS	16 _{GA} MEDIUN CROWN STAPLE	Electro Galvanized Primary Applications Crates, Pallets, Sheathing and Cabinet Backs		
HEADLESS PIN NAILS	23 _{GA}	Electro Galvanized Primary Applications Fine Trim Work		
Get our flyer d	SOLD IN RECLOSABLE COMPACT BOXES			

Length	Penny/Diameter	Shank	Coating	Point	Sort Name	Description					
15 ga "DA" Style Angled Finish Nails											
1-1/2"					45248	DA 1-1/2in 15ga Electo Galvanized Chisel Point					
2"	15G	N/A	Electro Galvanized	Chisel	45249	DA 2in 15ga Electo Galvanized Chisel Point					
2-1/2"					45250	DA 2-1/2in 15ga Electo Galvanized Chisel Point					
	16 ga Straight Finish Nails										
1"					45254	PB 1in 16ga Electo Galvanized Chisel Point					
1-1/4"					45255	PB 1-1/4in 16ga Electo Galvanized Chisel Point					
1-1/2"	16G	N/A	Electro Galvanized	Chisel	45256	PB 1-1/2in 16ga Electo Galvanized Chisel Point					
2"					45257	PB 2in 16ga Electo Galvanized Chisel Point					
2-1/2"					45258	PB 2-1/2in 16ga Electo Galvanized Chisel Point					
	16 ga 20° Angled Finish Nails										
1-1/2"					45261	PBA 1-1/2in 16ga Electo Galvanized Chisel Point					
2"	16G	iG N/A	Electro Galvanized	Chisel	45262	PBA 2in 16ga Electo Galvanized Chisel Point					
2-1/2"	2-1/2"				45263	PBA 2-1/2in 16ga Electo Galvanized Chisel Point					
18 ga Brad Nails											
5/8"			Electro Galvanized		45264	PX 5/8in 18ga Electo Galvanized Chisel Point					
1-1/4"	18G	N/A		Chisel	45265	PX 1-1/4in 18ga Electo Galvanized Chisel Point					
1-1/2"	186	N/A	Electro Galvanized		45266	PX 1-1/2in 18ga Electo Galvanized Chisel Point					
2"					45267	PX 2in 18ga Electo Galvanized Chisel Point					
			18 ga	"L" Style Narrow C	rown Staples						
5/8"					45271	1/4 crn 5/8in 18ga Electro Galvanized Chisel Point					
7/8"					45272	1/4 crn 7/8in 18ga Electo Galvanized Chisel Point					
1"	18G	18G N/A	Electro Galvanized	Chisel	45273	1/4 crn 1in 18ga Electo Galvanized Chisel Point					
1-1/4"					45274	1/4 crn 1-1/4in 18ga Electo Galvanized Chisel Point					
1-1/2"					45275	1/4 crn 1-1/2in 18ga Electo Galvanized Chisel Point					
			16 ga '	'N" Style Medium (Crown Staples						
1-1/2"	16G	N/A	Electro Galvanized	Chisel	45276	7/16crn 1-1/2in 16ga Electo Galvanized Chisel Point					
2"	100	IN/A	Liedilu daivailized	CIIISCI	45278	7/16crn 2in 16ga Electo Galvanized Chisel Point					
			:	23 ga Headless Mid	cro Pins						
1/2"			Electro Galvanized	Chisel	45279	MP 1/2in 23ga Electo Galvanized Diamond Point					
3/4"	23G	N/A			45281	MP 3/4in 23ga Electo Galvanized Diamond Point					
1"					45282	MP 1in 23ga Electo Galvanized Diamond Point					









Fasteners

Decking & Construction Screws

Designed for outdoor durability, decking screws offer strong, secure fastening for wood, composite, or PVC decking. With corrosionresistant coatings and self-drilling tips, they ensure clean finishes, reduced splitting, and long-lasting hold in all weather conditions.



Deep star drive recess to prevent cam-out on all screws

ACQ APPROVED

ACQ APPROVED

Use wood deck screws for a natural

CD

COMPOSITE DECK SCREW



√ #8, #9, 1-5/8" - 3" Screws

- ✓ Undercut Head prevents mushrooming
- ✓ Dual threads improve performance
- ✓ Type 17 tip eliminates the need to pre-drill
- ✓ T20 Bit Included
- ✓ Top 3 most popular colors for composite/PVC decks









Specially designed for use in composite, or PVC decking.

WD

WOOD **DECK SCREW**

Flat Head Sharp Cutting Point



√ #8, #9 or #10. 1-1/4" - 4" Screws

- ✓ Reinforced head with nibs for better countersinking
- ✓ Dual thread design reduces splitting
- ✓ Sharp cutting tip specially designed for hardwood.
- ✓ T25 Bit Included
- ✓ Avaliable in 3 colors









Specially designed for use in wood decking and coated for pressure treated wood.

CS

CONSTRUCTION **SCREW**




- ✓ #8, #9 or #10, 1-1/4" - 4" Screws
- ✓ Flat head with nibs provides a smooth clean finish
- ✓ Designed for strength and durability
- ✓ Type 17 tip eliminates the need to pre-drill
- ✓ T25 Bit Included ✓ Avaliable in Zinc






Zinc coating for interior projects.

Decking & Construction Screws

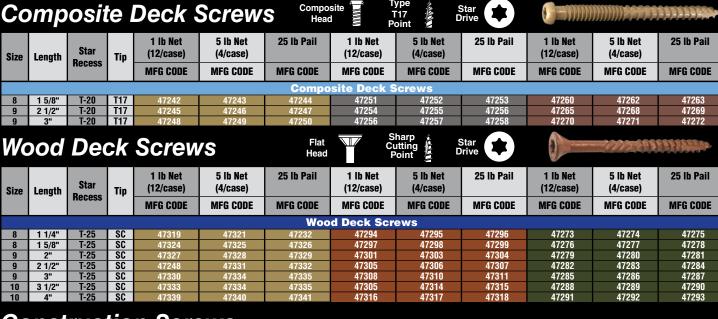

Construction Screws

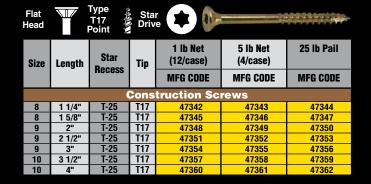











NOTES		•
		

56 **Interchange Pro** www.Interchange-Pro.com 57

Drywall & Metal Framing Screws

Our premium drywall and framing screws are engineered to provide superior performance for all your construction and

renovation projects. If you're installing drywall or framing a structure, our screws offer strength, reliability, and ease of use.

Sharp Point

noisture exposure. Has a dull matte black finish.

Zinc Ideal for indoor projects. Provides double the moisture rotection vs phosphate. Has a shiny silver or yellow finish.

Drywall & Metal Framing Screws

ance – best suited for indoor applications with minima

Zinc Ideal for indoor projects. Provides double the moisture

DRYWALL TO WOOD Primary Applications Drywall to Wood DRYWALL TO LIGHT GAUGE METAL Primary Applications Drywall to Light Metal - 25 gauge **DRYWALL TO MEDIUM GAUGE METAL Primary Applications** Drywall to Metal - 20 gauge to 14 gauge SD #2 Head Board, Exterior Sleathing **LATH TO METAL Primary Applications** Lath to Metal - 20 gauge to 14 gauge SD #2 **METAL TO LIGHT GAUGE METAL Primary Applications** Lath to Light Metal - 25 gauge to 20 gauge **METAL TO MEDIUM GAUGE METAL Primary Applications** Pan Mod Truss Hex Washer SD SD #2 #3 Metal to Thick Metal - 20 gauge to 14 gauge **LATH TO WOOD Primary Applications** Lath to Wood Mod Truss Head

Length	Penny/Diameter	Head	Coating	Point	Manufacture Code	Description				
				Drywall to	Wood					
1-1/4"					47229	Drywall #6 1-1/4in Crs Bugle Shrp Phos - 8M				
1-5/8"	#6		Phosphate		47230	Drywall #6 1-5/8in Crs Bugle Shrp Phos - 5M				
2"		Bugle	riiospiiate	Sharp	47231	Drywall #6 2 Crs Bugle Shrp Phos - 3.5M				
2"	#7	Dugie		Ollarp	47370	Drywall #7 2in Crs Bugle Shrp Phos - 3.5M				
1-1/4"	#6		Yellow Zinc		47236	Drywall #6 1-1/4in Crs Bugle Shrp YZinc - 8M				
2"	"0				47237	Drywall #6 2in Crs Bugle Shrp YZinc - 3.5M				
			Di	rywall to Light (Gauge Metal					
1-1/8"					47232	Drywall #6 1-1/8in Fine Bugle Shrp Phos - 10M				
1-1/4"	#6	Bugle	Phosphate	Sharp	47233	Drywall #6 1-1/4in Fine Bugle Shrp Phos - 8M				
1-5/8"	πυ	Dugie	i nospilate	onarp	47234	Drywall #6 1-5/8in Fine Bugle Shrp Phos - 5M				
2"					47235	Drywall #6 2in Fine Bugle Shrp Phos - 3.5M				
Drywali to Metal										
1-1/4"	#6	Bugle	Zinc	SD #2	47363	Drywall #6 1-1/4in Fine Bugle SD Zinc - 8M				
1-7/8"	πυ				47364	Drywall #6 1-7/8in Fine Bugle SD Zinc - 4M				
				Lath to W	lood					
1"	#8	Mod Truss	Zinc	Oh	47238	Lath #8 1in Fine Mod Truss SD Zinc - 8M				
1-5/8"	#0		ZIIIG	Sharp	47239	Lath #8 1-5/8in Fine Mod Truss SD - 8M				
				Lath to M	letal					
1"	#8	Mod Truss	Zinc	SD #2	47240	Lath #8 1in Fine Mod Truss SD Zinc - 8M				
1-5/8"	#0		ZIIIG	3D #Z	47241	Lath #8 1-5/8in Fine Mod Truss SD Zinc - 5MS				
				Metal to Metal L	ight Gauge.					
7/16"	#7	Pan	Phosphate	Sharp	47368	Framing #7 7/16in Pan Sharp Phos - 10M				
1"	#8	Mod Truss	Zinc	Sharp	47238	Lath #8 1in Fine Mod Truss SD Zinc - 5M				
1-5/8"	8"		ZIIIG	Silaip	47239	Lath #8 1-5/8in Fine Mod Truss SD - 8M				
			Me	etal to Metal Me	edium Gauge					
1/2"	#8	Mod Truss		SD #2	47365	Framing #8 1/2in Fine Truss SD Zinc - 10M				
7/16"	#7	Pan		SD #2	47369	Framing #7 7/16in Pan SD Zinc - 10M				
3/4"	#10	Mod Truss	7:	SD #3	47366	Framing #10 3/4in Fine Truss SD3 Zinc - 5M				
3/4"	#10	Hex Washer	z Zinc	₩3	47367	Framing #10 3/4in Hex SD3 Zinc - 6M				
1"	"0			OD #0	47240	Lath #8 1in Fine Mod Truss SD Zinc - 8M				
1-5/8"	#8	Mod Truss		SD #2	47241	Lath #8 1-5/8in Fine Mod Truss SD Zinc - 5MS				



NOTES			

Get our flyer digitally! Scan the QR code.



58 **Interchange Pro** www.Interchange-Pro.com



CONSTRUCTION SUPPLIES



PVC WATER HOSE

Water Hose

Water Hose

Durable and reliable, our water hoses are built to withstand tough construction site conditions. Our rubber and PVC water hoses are heavy duty, kink resistant, abrasion resistant and made to handle extreme weather conditions - yet they are lightweight and portable. Ideal for dust control, equipment cleaning and other general water transfer on the job.

Superior **Fittings**

Interchange PRO now carries heavy duty floor protection. The highest quality in the industry!

Heavy Duty Floor Protection

RUBBER WATER HOSE

- √ 3/4" Solid brass fittings
- ✓ 20% Lighter than standard rubber hose
- ✓ Suitable for use with hot water up to 180°F
- ✓ 500 PSI minimum burst pressure
- ✓ Ozone Resistant / Abrasion Resistant / Kink Resistant
- ✓ Bend Restrictor for added protection
- ✓ 3:1 Safety Factor







3/4" Solid Brass


Coupling

3/4" Solid

Nozzle

Model Model Manf Manf Diameter Length RBW5850 84782 RBW3450 84785 50' 50' Rubber Water 5/8" 75' RBW5875 84783 3/4" 100' RBW34100 84786 Hose 100' RBW58100 84784

PVC WATER HOSE



- ✓ Tough, weather-resistant PVC cover
- ✓ High-strength polyester-braided radial reinforcement
- ✓ 500 PSI minimum burst pressure

Interchange Pro

- ✓ Kink-free 3-ply construction
- ✓ 4-finger grip bend restrictor
- Lightweight and portable

Туре	Diameter	Length	Model	Manf	Diameter	Length	Model	Manf
PVC		50'	PVCW5850	84565		50'	PVCW3450	84568
Water	5/8"	75'	PVCW5875	84566	3/4"	100'	PVCW34100	84569
Hose		100'	PVCW58100	84567				





FEATURES:

- √ 40MIL thick
- √ 38" X 100' designed for a 2" overlap at the seam
- ✓ Liquid Resistant
- ✓ Recyclable
- ✓ Individually wrapped
- √ 16 Rolls to a pallet








38" x 100'

www.Interchange-Pro.com 63

62

Roofing Underlayment

Synthetic roof underlayment is durable, tear-resistant, and can endure UV and moisture exposure. It's built to handle foot traffic during installation and remains effective even after rough handling.

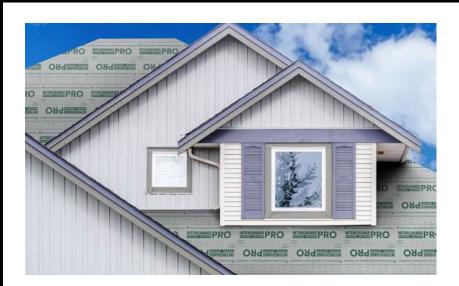

Repels Moisture: Crafted from durable plastic, it effectively repels

water to prevent moisture infiltration and resists mold growth, offering superior protection

compared to felt.

Lightweight: Up to four times lighter than felt, making it easier

to handle.

Fast installation: Fewer rolls needed compared to felt, reducing the

time spent on the job.

Safety: Slip-resistant surfaces and clear overlap guides

improve worker safety and installation accuracy.



Standards / Approvals:

ESR 5197 • ASTM D8257 • ASTM D226 · ASTM E108 Class A • Florida FBC#FL 42105 · AC188 · CAN/CSA A123.3

Stucco Tape

This tape features a durable, moisture-resistant polyethylene (PE) film backing with a synthetic rubber-based pressure-sensitive adhesive, providing strong adhesion to a variety of surfaces. Designed for high conformability without excessive stretching, the stiffer backing enhances ease of handling in certain applications.



Applications:

Patching, sealing, bundling & wrapping.

Also used for splicing and surface protection, vapor barrier seaming, wire hold down, multipurpose convention applications, short term masking for EIFS and holding poly sheeting barrier film.



Product Details							
Width	2"						
Length	60YD						
Backing	Polyethylene (PE) Film						
Adhesive	Synthetic Rubber						
Adhesion to Steel	75 (20.5 N/25mm)						
Tensile Strength	23 (100.7 N/25mm)						
Elongation	75						
Total Thickness	7.0 (0.178mm)						
Application Temperature Range	+45° to +150°F (+7°C ~ +65°C)						
Operating Temperature Range	+20°F ~ +200°F (-7°C ~ +93°C)						

www.Interchange-Pro.com 64 Interchange Pro 65

4' x 250' Synthetic

Part No. 45389 Item No. 475567

EPRO. ■

Annealed Black Tie Wire


Our tie wire is a durable, flexible, and easy-to-use solution for securing rebar and other materials. Made from high-quality, annealed steel, it provides exceptional strength while remaining pliable for quick and efficient tying. Ideal for concrete reinforcement, fencing, and general construction applications. Designed to fit standard dispensing reels for additional convenience.



Box/MOQ	Diameter	Coating	Weight	Part Number	Sort Na	me	Hole Style	Description
20 Rolls	16G	Black	3.5 lbs	84861	TW16B-3	S.5RH	Round	16ga Round Hole Annealed Black 3.5lb/rl
20 Rolls	16.5G	Black	3.5 lbs	84862	TW16.5B-3.5RH		Round	16.5ga Round Hole Annealed Black 3.5lb/rl
20 Rolls	16G	Black	3.5 lbs	84863	TW16B-3.5SH		Square	16ga Square Hole Annealed Black 3.5lb/rl
20 Rolls	16.5G	Black	3.5 lbs	84864	TW16.5B-	3.5SH	Square	16.5ga Square Hole Annealed Black 3.5lb/rl



Square Hole

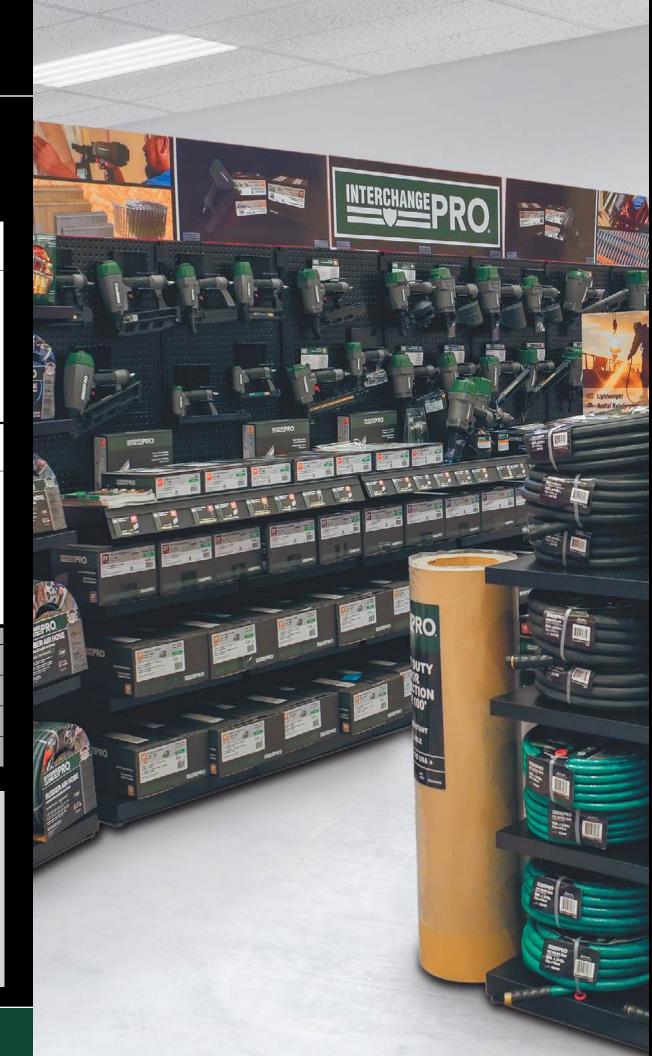



DISPLAY & POI

Рор

∞

Display

2' Gondolas & Accessories

The ultimate display solution for any product and any space. Versatile 2' racks will cover all your display needs with ease. Modular "Easy Add" sections allow you to customize and expand to any width and height.

Get our flyer digitally! Scan the QR code.





Gondola Accessories



Back Panel Item# 98842



Shelves Item# 98843



Channel Card Holder

Item# 448-101 23"x 16"

2 Gondola **Connectors** Item# 98844



4"X 2.625" Fastener

Tool Holder (5 pk) tem# TH332580BLACK


Display Cards

Poly Air Hose 1/4 Pallet Display

This lightweight, durable cardboard display features three sturdy shelves and a space-saving footprint—perfect for any retail floor. Easy to set up and move, it holds 24 to 60 Poly Air Hoses, making restocking and merchandising quick and efficient.









	POLY	AIR HOSE	
Diameter	Length	Model	Manf
	25'	PU1425-FF-BLU	84556
1/4"	50'	PU1450-FF-BLU	84557
	100'	PU14100-FF-BLU	84558

See pg 10 for more information on our Poly Air Hoses









NOTES		•

Interchange Pro www.Interchange-Pro.com 69

Tool Part Kits

Tool	Kit Name	Description
	NSR8321PROFRAMERKO	BUMPER
	NSR8321PROFRAMERK1	ORINGS
	NSR8321PROFRAMERK2	PISTON/DRIVER
	NSR8321PROFRAMERK3	HEAD CAP ASSY
NSR83-21PROFRAMER	NSR8321PROFRAMERK4	TRIGGER KIT
	NSR8321PROFRAMERK5	MAG ASSY
	NSR8321PROFRAMERK6	GUIDE BODY ASSY
	NSR8321PROFRAMERK7	SAFETY ASSY
	NSR8321PROFRAMERK8	FEEDER KIT
	NSR8321PROK1	ORING KIT
	NSR8321PROK2	PISTON/DRIVER
	NSR8321PROK3	HEAD CAP ASSY
	NSR8321PROK4	TRIGGER KIT
NSR83-21PRO	NSR8321PROK5	MAG ASSY
.101100 211 113	NSR8321PROK6	GUIDE BODY
	NSR8321PROK7	SAFETY ASSY
	NSR8321PROK8	FEEDER KIT
	NSR8321PROK9	BUMPER
	NSC8328PROK1	ORINGS
	NSC8328PROK2	PISTON/DRIVER ASSY
	NSC8328PROK3	HEAD CAP ASSY
	NSC8328PROK4	TRIGGER KIT
NSC83-28PRO	NSC8328PROK5	MAG ASSY Guide Body
	NSC8328PROK6	
	NSC8328PROK7 NSC8328PROK8	SAFETY ASSY FEEDER KIT
	NSC8328PROK9	BUMPER KIT
	NSCOSZOPHUK9	BUWIFEN KII
	CN5650PROK1	ORINGS
	CN5650PROK2	PISTON/DRVR ASSY
CN565	CN5650PROK3	HEAD CAP ASSY
	CN5650PROK5	MAG ASSY
CN565-0PRO	CN5650PROK6	GUIDE BODY ASSY
	CN5650PROK7	SAFETY ASSY
	CN5650PROK9	BUMPER
	CN5650PROK4 TRIGGER ASSY	
	CN5650PROK8	FEEDER ASSY
	CN56515PROK1	ORINGS
	CN56515PROK2	PISTON/DRVR ASSY
	CN56515PROK3	HEAD CAP ASSY
	CN56515PROK4	TRIGGER ASSY
CN565-15PRO	CN56515PROK5	MAG ASSY
	CN56515PROK6	GUIDE BODY ASSY
	CN56515PROK7	AFETY ASSY
	CN56515PROK8	FEEDER ASSY
	CN56515PROK9	BUMPER

Tool	Kit Name	Description
NSJH38-34PRO	NSJH38-34PROK1	ORINGS
	NSJH38-34PROK2	PISTON/DRVR ASSY
	NSJH38-34PROK3	HEAD CAP ASSY
	NSJH38-34PROK4	TRIGGER ASSY
	NSJH38-34PROK5	MAG ASSY
	NSJH38-34PROK6	GUIDE BODY ASSY
	NSJH38-34PROK7	SAFETY ASSY
	NSJH38-34PROK8	FEEDER ASSY
	NSJH38-34PROK9	BUMPER
	NSJH64-34PROK1	ORINGS
	NSJH64-34PROK2	PISTON/DRVR ASSY
	NSJH64-34PROK3	HEAD CAP ASSY
	NSJH64-34PROK4	TRIGGER ASSY
NSJH64-34PRO	NSJH64-34PROK5	MAG ASSY
	NSJH64-34PROK6	GUIDE BODY ASSY
	NSJH64-34PROK7	SAFETY ASSY
	NSJH64-34PROK8	FEEDER ASSY
	NSJH64-34PROK9	BUMPER
	SP4016-4PROK5	MAG ASSY
	SP4016-PROK1	ORINGS
	SP4016-PROK2	PISTON/DRVR ASSY
	SP4016-PROK3	HEAD CAP ASSY
SP4016PR0	SP4016-PROK6	GUIDE BODY ASSY
	SP4016-PROK7	SAFETY ASSY
	SP4016-PROK8	FEEDER ASSY
	SP4016-PROK9	BUMPER
	SP4016PROK4	TRIGGER ASSY
	SN5016-4PROK5	MAG ASSY
	SN5016-PROK1	ORINGS
	SN5016-PROK2	PISTON/DRVR ASSY
	SN5016-PROK3	HEAD CAP ASSY
SN5016PRO	SN5016-PROK6	GUIDE BODY ASSY
	SN5016-PROK7	SAFETY ASSY
	SN5016-PROK8	FEEDER ASSY
	SN5016-PROK9	BUMPER
	SN5016PROK4	TRIGGER ASSY
	BULK PARTS	TOCK
	CRN4500PROK1	ORINGS
	CRN4500PROK2	PISTON/DRIVER
	CRN4500PROK3	HEAD CAP ASSY
ODMATOODDC	CRN4500PROK4	TRIGGER KIT
CRN4500PRO	CRN4500PROK5	MAG ASSY
	CRN4500PROK6	GUIDE BODY ASSY
	CRN4500PROK7	SAFETY ASSY
	CRN4500PROK8	FEEDER KIT
	CRN4500PROK9	BUMPER







Get our flyers & more digitally!

Scan the QR code.



www.Interchange-Pro.com 1-800-745-6735.









70 71



The state of the s

www.Interchange-Pro.com



Fasteners
Accessories
Construction Supplies

To order, contact your local sales representative or call please call 1-800-745-6735.