

**INTERCHANGE
PRO**



Introducing Interchange PRO

Product Catalog



Introduction



About Our Brand

Founded in 1982, *Interchange Brands, LLC* began by supplying replacement nails and staples, quickly becoming one of the nation's largest sources for interchangeable fasteners. At the time when replacement options were limited and fragmented - often imported from Europe - the company brought order to the market, providing dealers with compatible staples and later expanding to support tool manufactures lacking their own fastener programs.

In 2022, we began the journey of rebranding as **Interchange PRO**, marking a new chapter of growth and innovation. Our product line now spans a wide range of tools, accessories, fasteners, construction supplies and display/point of purchase solutions. Our team is expanding, strengthening customer support, and increasing engagement to better serve our customers. We also enhanced our digital presence, continually updating product information and resources on www.Interchange-Pro.com to keep you informed. We remain committed to providing the best service and solutions in the industry.

Interchange PRO is a trusted brand specializing in high-quality construction products and tools for professionals and DIY enthusiasts. Renowned for its durable fasteners, nails, screws, and accessories, Interchange PRO delivers innovative solutions for a variety of projects. With a focus on performance and reliability, our products ensure efficiency and lasting results.



Table of Contents

Fastener Reference 4

Nails & Corrosion	4	Collated Nails	5	Collated Staples	7
Finishes & Applications	4	Collated Finish & Brads	6		

Pneumatic Tools 9

Roofing Tools	10	Joist Hanger Tools	10	Staplers	11
Siding/Fencing Tools	10	Framing Tools	10	Finish Tools	11

Accessories 13

Air Hose	14	Oils & Lubricants	15	Nail Gun Hangers	16
--------------------	----	-----------------------------	----	----------------------------	----

Fasteners 17

Collated Nails	18	1 & 5 lb Bulk Nails	44	Decking & Construction	
Collated Finish	32	50 lb Bulk Nails	50	Screws	56
Collated Staples	36	1M Collated Nails	52	Drywall & Metal Framing	
		1M Finish Nails	54	Screws	58

Construction Supplies 61

Water Hose	62	Roofing Underlayment	64	Tie Wire	66
Floor Protection	63	Masonry Stucco Tape	65		

Display & POP 67

2' Gondolas & Accessories	68	Poly Hose Display	69
-------------------------------------	----	-----------------------------	----

Looking for our
Tool Part Kits?... See Page 70

Fastener Reference



Nails & Corrosion

Fastener performance in wood depends on the fastener's metal and coating, the wood's chemical makeup, and environmental conditions.

- Galvanizing protects steel from rust, but salt, humidity, and pollution can break it down over time.
- Certain woods, like redwood and cedar, contain tannins that react with zinc coatings, causing stains.
- Wood acidity, preservatives, and fire retardants can corrode some metals.

For harsh environments, aluminum or stainless steel fasteners are best. For unusual applications, seek advice from lumber dealers, building associations, manufacturers, or engineers.

Finishes & Applications

INTERIOR - Limited corrosion protection - Suggested for interior applications. Do not use in treated lumber or where rust and corrosion is a concern.

Bright: Uncoated steel finish. Not for use in treated lumber.

Vinyl Coated: Provides ease of nail driving and improved holding power.

EXTERIOR - Higher corrosion resistance - Suggested for exterior use.

Electro-Galvanized: Limited corrosion protection. Applied to steel through an electrical charge. Meets ASTM A-641 standards.

Hot Galvanized: The coating on hot galvanized nails could be hot dipped zinc, hot dipped wire zinc or thermal diffused zinc. All hot galvanized nails comply with ASTM A153 standards.

Stainless Steel: Provides the best corrosion resistance for use in cedar, redwood and treated lumber.

Aluminum: Provides the best corrosion resistance for specialty exterior applications such as gutters and trimming. Do not use with treated lumber.



Coating Guide

Bright Ideal for indoor projects. Excellent holding power & a clean finish for framing, carpentry and woodworking.

Hot Galvanized Ideal for outdoor & high-moisture environments. Durable & rust-resistant. ACQ Approved.

Electro Galvanized Ideal for indoor use. Ensuring strength & protection with its added corrosion resistance coating.

Stainless Steel Provides the best corrosion resistance. For use in cedar, redwood and treated lumber.

Electro Galvanized Ideal for light outdoor use. Ensuring strength & protection with its added corrosion resistance coating.

Aluminum Provides the best corrosion resistance for specialty exterior applications such as gutters and trimming. Do not use with treated lumber.



Collated Nails



DPS 21° Round Head - Plastic Strip Collated

1-1/2" - 5" Length | .109 - .162 Diameter

BRIGHT ELECTRO-GALVANIZED HOT-GALVANIZED STAINLESS STEEL

Framing, Decking, Sheathing, Subflooring and Truss Construction

Use InterchangePRO® tools NSR83-21 PRO and/or NSR83-21 PRO FRAMER



PTJH 34° Round Head - Metal Connector - Paper Tape Collated

1-1/2" - 2-1/2" Length | .113 - .162 Diameter

BRIGHT ELECTRO-GALVANIZED HOT-GALVANIZED

Joist Hanger and Metal Connector Installation

Use InterchangePRO® tools NSJH38-34 PRO and/or NSJH64-34 PRO



PT / PTOR 30° - 34° Clipped or Offset Round Head - Paper Collated

2" - 3-1/2" Length | .113 - .148 Diameter

BRIGHT ELECTRO-GALVANIZED HOT-GALVANIZED

Framing, Decking, Sheathing, Subflooring and Truss Construction

Use InterchangePRO® NSC90-34 PRO tool



BW 28° Clipped Head - Wire Strip Collated

2" - 3-1/2" Length | .113 - .131 Diameter

BRIGHT ELECTRO-GALVANIZED HOT-GALVANIZED

Framing, Decking, Sheathing, Subflooring and Truss Construction

Use InterchangePRO® NSC83-28 PRO tool



HWCF / MWCL 15° Round Head - Wire Coil Collated

1-1/4" - 4" Length | .083 - .148 Diameter

BRIGHT ELECTRO-GALVANIZED ELECTRO-GALVANIZED HOT-GALVANIZED STAINLESS STEEL

Floor/Wall Framing, Siding, Decking, Sheathing, Subflooring, Fencing, Wood Shingles, Pallets, Boxes and Crating

Use InterchangePRO® CN565-15 PRO tool



MPC 15° Round Head - Plastic Coil Collated

1-3/4" - 2-1/2" Length | .092 - .099 Diameter

ELECTRO-GALVANIZED ELECTRO-GALVANIZED HOT-GALVANIZED STAINLESS STEEL

Siding, Fencing, and Decking

Use InterchangePRO® CN565-15 PRO tool



CR 15° Roofing Nails - Wire Coil Collated

3/4" - 2-1/2" Length | .120 Diameter

ELECTRO-GALVANIZED HOT-GALVANIZED STAINLESS STEEL

Asphalt/Fiberglass Shingles, Roofing Felt, Foam/Fiberboard Sheathing and Insulation Board

Use InterchangePRO® CRN4500 PRO tool



DPC 0° Round Head - Plastic Sheet Collated

1-1/2" - 5" Length | .086 - .148 Diameter

BRIGHT ELECTRO-GALVANIZED ELECTRO-GALVANIZED HOT-GALVANIZED STAINLESS STEEL ALUMINUM

Siding, Fencing, and Decking

Use InterchangePRO® CN565-0 PRO tool



DPRC 20° Round Head - Plastic Rope Coil Collated

1-3/4" - 1-7/8" Length | .086 Diameter

HOT-GALVANIZED STAINLESS STEEL

Siding, Fencing, Shingle and Decking

Use InterchangePRO® CN50-20 PRO tool



Collated Finish Nails and Brads




BA 25° Angled Finish Nails

1-1/2" - 2-1/2" Length | 15 Gauge

ELECTRO-GALVANIZED

Paneling and Trim, Frame Assembly, Door and Window Casings and Cabinet Building



DA 34° Angled Finish Nails

Recommended use with InterchangePRO® tool DA250 PRO

1" - 2-1/2" Length | 15 Gauge

ELECTRO-GALVANIZED **STAINLESS STEEL**

Paneling and Trim, Frame Assembly, Door and Window Casings and Cabinet Building



MP 23 Gauge Micro Pins

1/2" - 1-3/8" Length | 23 Gauge

ELECTRO-GALVANIZED

Finish, Trim, Cabinets, Mirror and Picture Frames



PB Medium Head Finish Nails

Recommended use with InterchangePRO® tool FN250 PRO

2" - 3-1/2" Length | .113 - .131 Diameter

ELECTRO-GALVANIZED **STAINLESS STEEL**

Paneling and Trim, Frame Assembly, Door and Window Casings and Cabinet Building




PBA 20° Angled Medium Head Finish Nails

1-1/2" - 2-1/2" Length | 16 Gauge

ELECTRO-GALVANIZED

Paneling and Trim, Frame Assembly, Door and Window Casings and Cabinet Building



PX 18 Gauge Medium Head Brads

Recommended use with InterchangePRO® tool BN200 PRO

1/2" - 2" Length | 18 Gauge

ELECTRO-GALVANIZED

Decorative Mouldings, Picture Frame Assembly, Trim and Cabinet Building



PY 18 Gauge Slight Head Brads

5/8" - 1" Length | 18 Gauge

ELECTRO-GALVANIZED

Decorative Mouldings, Picture Frame Assembly, Trim and Cabinet Building



PZ 18 Gauge Headless Pins

1/2" - 3/4" Length | 18 Gauge

ELECTRO-GALVANIZED

Decorative Mouldings, Picture Frame Assembly, Trim and Cabinet Building



Collated Staples

Fine Wire Staples



A Series 3/16" Crown Staple

22 Gauge - 1/4" - 1/2" Leg

ELECTRO GALVANIZED



D Series 3/16" Crown Staple

22 Gauge - 5/8" Leg

ELECTRO GALVANIZED



B Series 1/2" Crown Staple

22 Gauge - 1/4" - 1/2" Leg

ELECTRO GALVANIZED



C Series 3/8" Crown Staple

22 Gauge - 5/32" - 5/8" Leg

ELECTRO GALVANIZED



5400 Series 3/16" Crown Staple

20 Gauge - 1/2" Leg

ELECTRO GALVANIZED



7500 Series 7/16" Crown Staple

20 Gauge - 3/8" Leg

ELECTRO GALVANIZED



F Series 1/2" Crown Staple

20 Gauge - 1/4" - 1/2" Leg

ELECTRO GALVANIZED



G Series 3/8" Crown Staple

20 Gauge - 1/2" Leg

ELECTRO GALVANIZED



5000 Series 1/2" Crown Staple

20 Gauge - 1/4" - 9/16" Leg

ELECTRO GALVANIZED

Hammer Tacker Staples



A11 Series 3/8" Crown Staple

Tacker Staples - 1/4" - 9/16" Leg

ELECTRO GALVANIZED



A19 Series 3/8" Crown Staple

Tacker Staples - 1/4" Leg

ELECTRO GALVANIZED STAINLESS STEEL



SHCR Series 3/8" Crown Staple

20 Gauge - 3/8" Leg

ELECTRO GALVANIZED



STCR Series 3/8" Crown Staple

20-23 Gauge - 1/4" - 9/16" Leg

ELECTRO GALVANIZED

Collated Staples

Medium Wire Staples



L Series 1/4" Crown Staple
 18 Gauge - 3/8" - 1-1/2" Leg
 Use InterchangePRO® SL150 PRO tool
ELECTRO GALVANIZED



SX Series 7/32" Crown Staple
 18 Gauge - 5/8" - 1-3/8" Leg
ELECTRO GALVANIZED



GSN Series 3/16" Crown Staple
 18 Gauge - 5/8" - 1-1/2" Leg
ELECTRO GALVANIZED



M Series 3/8" Crown Staple
 18 Gauge - 3/8" - 1-1/2" Leg
 Use InterchangePRO® SM125LN PRO tool
ELECTRO GALVANIZED



J Series 7/16" Crown Staple
 18 Gauge - 3/8" - 5/8" Leg
ELECTRO GALVANIZED



K Series 1/4" Crown Staple
 19 Gauge - 3/4" Leg
ELECTRO GALVANIZED

Heavy Wire Staples



N Series 7/16" Crown Staple
 16 Gauge - 1/2" - 2" Leg
 Use InterchangePRO® SN5016 PRO tool
ELECTRO GALVANIZED **STAINLESS STEEL**



P Series 1" Crown Staple
 16 Gauge - 3/8" - 2" Leg
 Use InterchangePRO® SP406 PRO tool
ELECTRO GALVANIZED



GSW Series 15/16" Crown Staple
 14 Gauge - 7/8" Leg
ELECTRO GALVANIZED



GSW Series 15/16" Crown Staple
 16 Gauge - 5/8" - 2" Leg
ELECTRO GALVANIZED



GS16 Series 1/2" Crown Staple
 16 Gauge - 3/4" - 2" Leg
ELECTRO GALVANIZED **STAINLESS STEEL**



Q Series 7/16" Crown Staple
 15 Gauge - 1-1/4" - 2-1/2" Leg
ELECTRO GALVANIZED



BCS Series 1/2" Crown Staple
 16 Gauge - 1" - 2" Leg
ELECTRO GALVANIZED



BCS Series 1" Crown Staple
 16 Gauge - 3/4" - 2" Leg
ELECTRO GALVANIZED



BCS-FS Series 1/2" Crown
 15 Gauge - 1-1/2" - 2" Leg
ELECTRO GALVANIZED



7600 Series 7/16" Crown Staple
 16 Gauge - 1" - 2" Leg
ELECTRO GALVANIZED



TOOLS

Pneumatic Tools



Durable, high performance tools designed for professional fastening tasks. Our selection helps you work faster, safer and with precision on every roofing job. Built to withstand tough job site conditions.

Pneumatic

Tools

	NSC83-28 PRO Framing Nailer Part No. 65740	NSC90-34 PRO Framing Nailer Part No. 65745	NSR83-21 PRO Framing Nailer Part No. 65730	NSR83-21 PRO Framer Framing Nailer Part No. 65735	CRN4500 PRO Roofing Nailer Part No. 65750
Item Info					
Fastener Type					
Fastener Range	Length: 2" to 3-1/2" Shank Dia.: .113" to .131" Head Dia.: .275" to .283"	Length: 2" to 3-1/2" Shank Dia.: .113" to .131" Head Dia.: .275" to .283"	Length: 2" to 3-1/2" Shank Dia.: .113" to .131" Head Dia.: .275" to .283"	Length: 2" to 3-1/2" Shank Dia.: .113" to .131" Head Dia.: .275" to .283"	Length: 2" to 3-1/2" Shank Dia.: .113" to .131" Head Dia.: .275" to .283"
Magazine Capacity	86-94 Nails	86-94 Nails	64 Nails	64 Nails	86-94 Nails
Firing Mode	Selectable trigger - Bump or Sequential Fire	Bump or Sequential trigger options	Bump Fire	Bump Fire	Selectable trigger - Bump or Sequential Fire
Operating Pressure	70-120psi, 4.8-8.3 bar	70-120psi, 4.8-8.3 bar	70-120psi, 4.8-8.3 bar	70-120psi, 4.8-8.3 bar	70-120psi, 4.8-8.3 bar
Weight	8.4 lbs., 3.8 kgs.	8.4 lbs., 3.8 kgs.	8.2 lbs., 3.7 kgs.	8.2 lbs., 3.7 kgs.	8.4 lbs., 3.8 kgs.
	CN565-0 PRO Coil Nailer Part No. 65770	CN565-15 PRO Siding Nailer Part No. 65765	CN50-20 PRO Coil Nailer Part No. 65781	NSJH38-34 PRO Joist Hanger Nailer Part No. 65755	NSJH64-34 PRO Joist Hanger Nailer Part No. 65760
Item Info					
Fastener Type		 			
Fastener Range	Length: 1-1/4" to 2-1/2" Shank Dia.: .080" to .105" Head Dia.: .216" to .236"	Length: Plastic: 1-1/4" to 2-1/2" Wire: 1-3/4" to 2-1/2" Shank Dia.: .083" to .099" Head Dia.: .197" to .236"	Length: 1-3/4" to 2" Shank Dia.: .086" to .092" Head Dia.: .197" to .224"	Length: 1-1/2" Shank Dia.: .131" / .148" Head Dia.: 0.28"	Length: 1-1/2" and 2-1/2" Shank Dia.: .131" / .148" / .162" Head Dia.: 0.28"
Magazine Capacity	300 Nails	200 Plastic Nails 250-400 Wire Nails	385 Nails	30 Nails	30 Nails
Firing Mode	Selectable trigger - Bump or Sequential Fire	Selectable trigger - Bump or Sequential Fire	Bump Fire	Sequential Fire	Sequential Fire
Operating Pressure	70-120psi, 4.8-8.3 bar	70-120psi, 4.8-8.3 bar	70-120psi, 4.8-8.3 bar	70-120psi, 4.8-8.3 bar	70-120psi, 4.8-8.3 bar
Weight	5.07 lbs., 2.3 kgs.	4.4 lbs., 2.0 kgs.	4.8 lbs., 2.2 kgs.	4.96 lbs., 2.25 kgs.	5.9 lbs., 2.7 kgs.

Pneumatic Tools



Tools

Pneumatic

NEW!
BN200 PRO
Brad Nailer
Part No. 65776



18 GA
BRAD NAIL

Length: 5/8" to 2"
Shank Dia.: 18 Gauge

110 Collated Brads

Selectable trigger -
Bump or Sequential Fire

70-120psi, 4.8-8.3 bar

2.7 lbs., 1.24 kgs.

NEW!
SL150 PRO
Narrow Crown Stapler
Part No. 65777



18 GA
NARROW CROWN
STAPLE

Crown: 1/4"
Leg Length: 3/8" to 1-1/2"
Gauge: 18 Gauge

107 Staples

Selectable trigger -
Bump or Sequential Fire

70-120psi, 4.8-8.3 bar

2.6 lbs., 1.2 kgs.

NEW!
FN250 PRO
Finish Nailer
Part No. 65775



16 GA
STRAIGHT NAIL

Length: 1-1/4" to 2-1/2"
Shank Dia.: 16 Gauge

107 Collated Brads

Selectable trigger -
Bump or Sequential Fire

70-120psi, 4.8-8.3 bar

3.8 lbs., 1.72 kgs.

NEW!
DA250 PRO
Finish Nailer
Part No. 65778



15 GA
ANGLED NAIL

Length: 1-1/4" to 2-1/2"
Shank Dia.: 15 Gauge

107 Collated Nails

Selectable trigger -
Bump or Sequential Fire

70-120psi, 4.8-8.3 bar

4.6 lbs., 2.1 kgs.

NEW!
MPN16 PRO
Finish Nailer
Part No. 65779



Length: 2" to 3-1/2"
Shank Dia.: .08" to 0.162"
Head Dia.: .344"

Single

Single

70-120psi, 4.8-8.3 bar

1.1 lbs., 0.49 kgs.

SP4016 PRO
Wide Crown Stapler
Part No. 65772



16 GA
WIDE CROWN
STAPLE

Crown: 1"
Leg Length: 5/8" to 1-1/2"
Gauge: 16 Gauge

140 Staples

Bump or Sequential
trigger options

70-120psi, 4.8-8.3 bar

5.29 lbs., 2.4 kgs.

SN5016 PRO
Medium Crown Stapler
Part No. 65771



16 GA
MEDIUM CROWN
STAPLE

Crown: Medium 7/16"
Leg Length: 1" to 2"
Gauge: 16 Gauge

140 Staples

Selectable trigger -
Bump or Sequential Fire

70-120psi, 4.8-8.3 bar

4.3 lbs., 1.94 kgs.

SM125LN PRO
Medium Crown Stapler
Part No. 65780



18 GA
MEDIUM CROWN
STAPLE

Crown: Medium 3/8"
Leg Length: 5/8" to 1-1/4"
Gauge: 18 Gauge

100 Staples

Trigger Fire
(no safety)

70-120psi, 4.8-8.3 bar

2.97 lbs., 1.35 kgs.

SM150V PRO
"M" Wire Stapler
Part No.



**NEW
TOOL
COMING
SOON!**

HN500A
Coil Nailer
Part No. 64281



0°
COIL SIDING NAIL


Length: 3-1/2" to 5-1/8"
Shank Dia.: .120" to 150"
Head Dia.: .335" to .354"

150 Nails

Sequential Fire

70-120psi, 4.8-8.3 bar

13.42 lbs., 6.10 kgs.

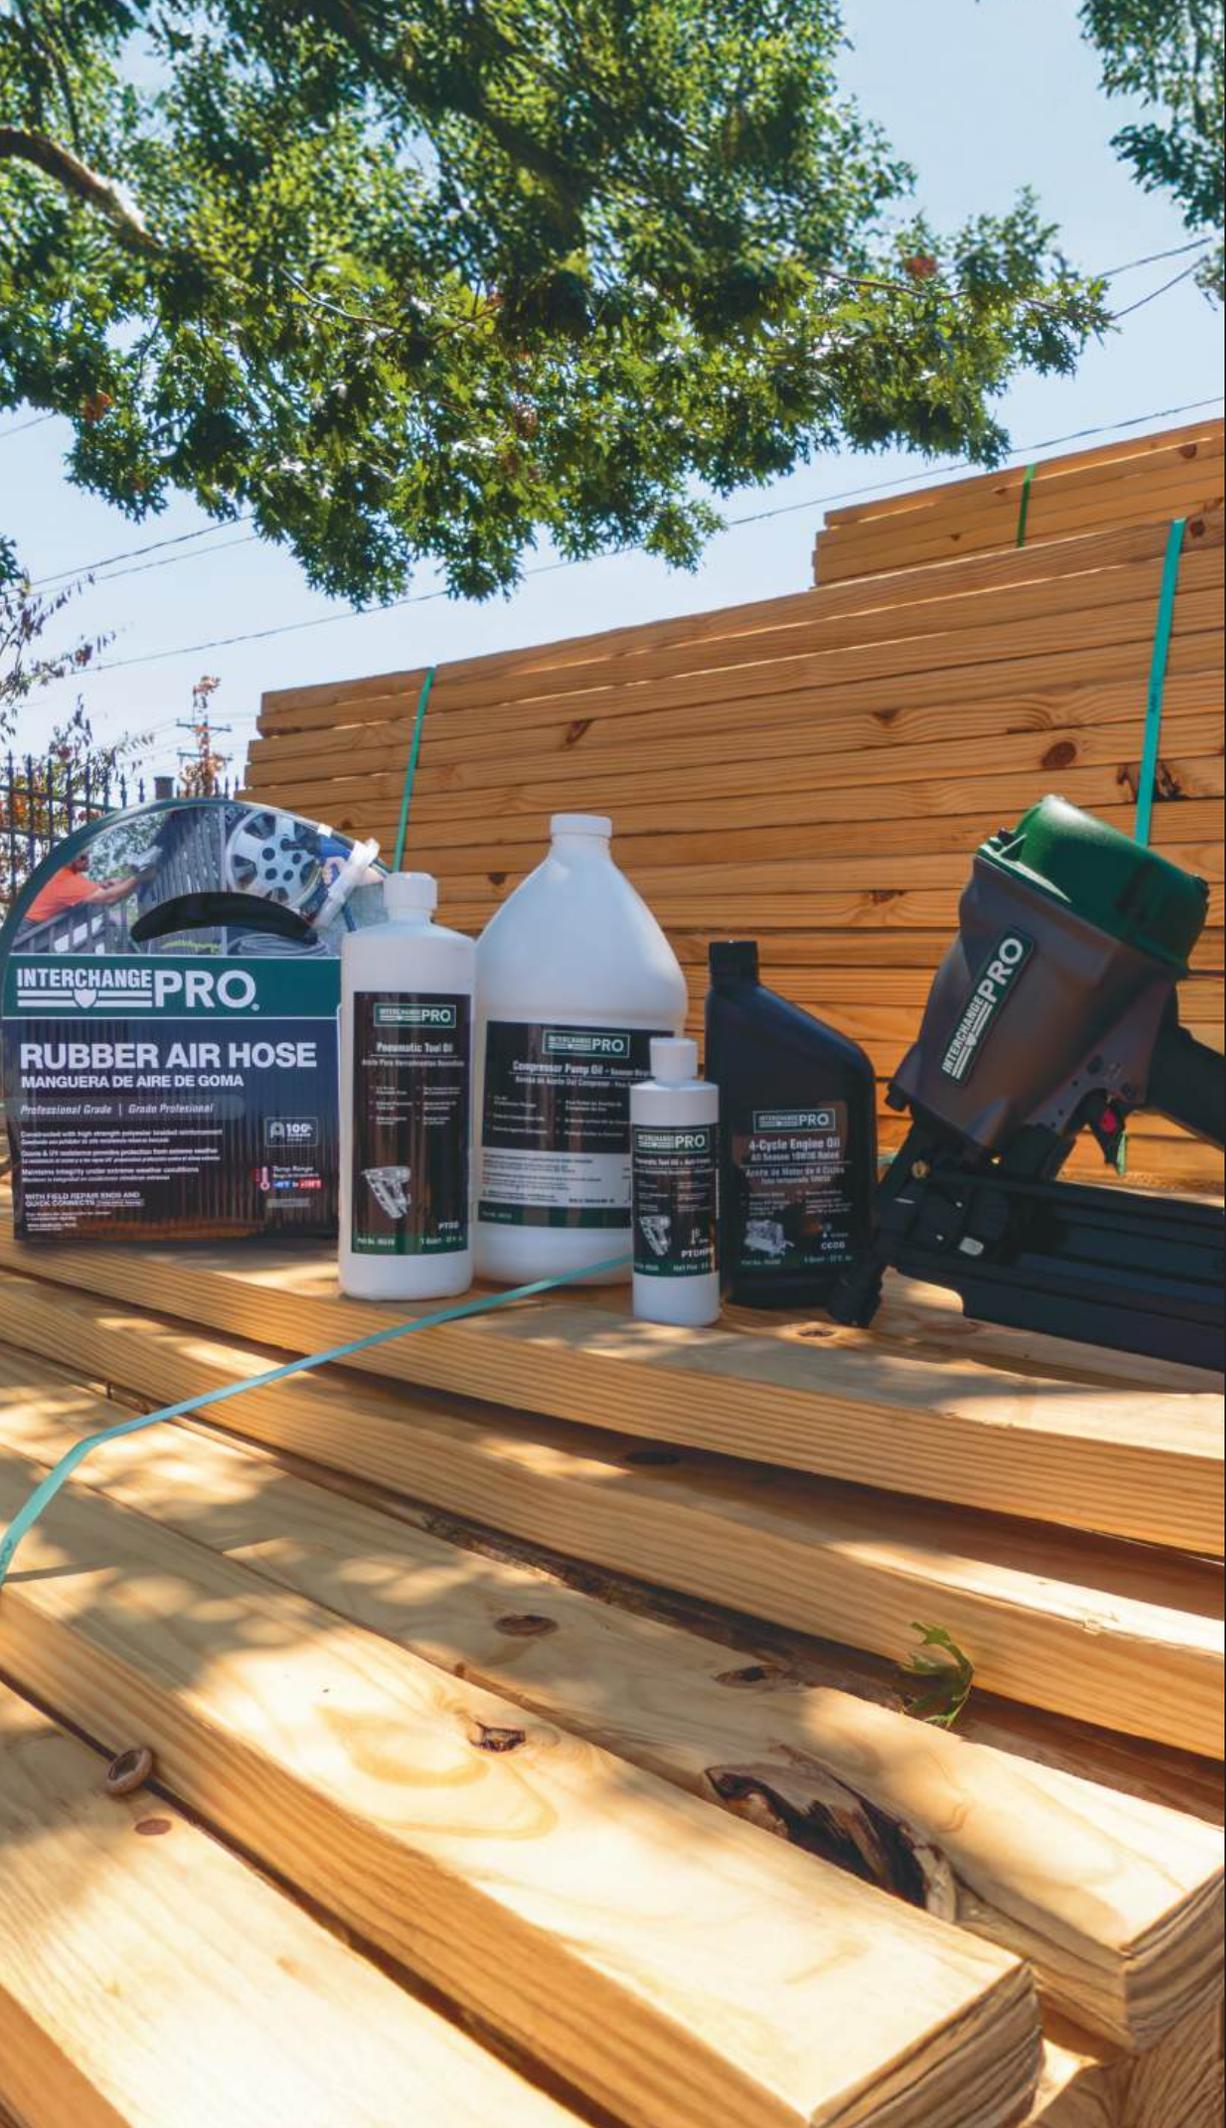

ACCESSORIES

Air Hoses



Our air hose collection includes durable poly, flexible rubber and tough PVC options. Each are built to handle demanding job site conditions while maintaining performance and reliability.



Fast-Fix Technology!

- Field Repair Ends
- Brass 6-ball coupler and male plug installed
- Constructed with strong polyester reinforcement
- Withstands temperatures from -40°F to 165° F
- Ultra Lightweight and Flexible in cold weather

POLY AIR HOSE

SORT NAME	MFG. NO.	DESCRIPTION
PU1425-FF-BLU	84556	1/4" X 25' BLUE
PU1450-FF-BLU	84557	1/4" X 50' BLUE
PU14100-FF-BLU	84558	1/4" X 100' BLUE



- Heavy-Duty 100% Rubber Construction
- 20% Lighter than standard rubber air hose
- Extreme Ozone & UV Resistance provides protection from extreme weather
- Flexibility in extreme conditions from -40°F to 190° F
- Constructed with high-strength polyester-braided reinforcement
- 4-finger grip bend restrictor for better ergonomics
- Oil Resistant Core & Cover
- Safety Factor 4:1

RUBBER AIR HOSE

SORT NAME	MFG. NO.	SIZE
RB1450-SC	84776	1/4" X 50'
RB14100-SC	84777	1/4" X 100'
RB3850-SC	84778	3/8" X 50'
RB38100-SC	84779	3/8" X 100'
RB1250-SC	84780	*1/2" X 50'
RB12100-SC	84781	*1/2" X 100'

*1/2" Hose assemblies do not come with Fast Fix hose ends or Quick Couplers

Accessories Air Hose

PVC, Poly & Recoil



PVC AIR HOSE KIT

SORT NAME	MFG. NO.	SIZE
PV3825KIT-10	84789	3/8" x 25' HOSE

QUICK START AIR HOSE KIT INCLUDES:

- | | |
|-----------------------------|-----------------|
| 1 - PVC Air Hose | 1 - Pencil |
| 1 - Blow Gun | Type Gauge |
| 1 - I/M 1/4" Female Coupler | 1 - Ball Foot |
| 2 - I/M 1/4" Female Plugs | Tire Chuck |
| 1 - I/M 1/4" Male Coupler | |
| 3 - I/M 1/4" Male Plugs | 1 - Teflon Tape |



AIR HOSE DISPLAY

SORT NAME	ITEM NO.
FG00176	444971

DESCRIPTION

DISPLAY FOR POLY AIR HOSE
 Sizes 1/4" X 25-ft, 1/4" x 50-ft, 1/4" x 100-ft
 Compact (Approx. 2-ft x 2-ft footprint)
 Lightweight cardboard pop-up design
 Holds 24 to 60 Hoses

Also Available!

RECOIL AIR HOSE

PREMIUM FIELD REPAIRABLE

Poly Recoil 3/8" x 25'

PUR3825-10-SC
84788



RECOIL AIR HOSE

ECONOMY

1/4" x 25" Poly Recoil
 Air Hose, 120 PSI

PUR1425-5-SC
84787




Oils & Lubricants

Our oils and lubricants are engineered to maximize performance and extend equipment life. Tool oils reduce friction, wear, and corrosion to keep tools running efficiently, while compressor oils help dissipate heat, protect critical components, and ensure smooth, reliable operation.

Pneumatic Tool Oil

For Summer or Winter


Lubricates internal parts of pneumatic tools, reducing friction and preventing wear. It also helps protect against rust, corrosion, and moisture damage for smooth, reliable performance.



Compressor Pump Oil

For Summer or Winter

Lubricates the pump components, reducing friction and wear. It helps ensure smooth operation, cools the pumps, and protects against rust and corrosion during summer or winter.



Compressor Engine Oil

4-Cycle Engine Oil

Lubricates and protects compressor parts, reducing friction, wear and tear. It ensures smooth operation and extends equipment life.



Accessories
Oils & Lubricants

Size	Sort Name	Season	Part Number	Description
Pneumatic Tool Oil				
Half Pint - 8 fl. oz.	PTOHP	Summer	95540	Pneumatic Tool Oil 8oz
Half Pint - 8 fl. oz.	PTOHPW	Winter	95545	Pneumatic Tool Oil 8oz with Anti-Freeze
1 Quart - 32 fl. oz.	PTOQ	Summer	95550	Pneumatic Tool Oil 32oz
1 Gallon - 128 fl. oz.	PTOG	Summer	95530	Pneumatic Tool Oil 1gal
Compressor Pump Oil				
1 Quart - 32 fl. oz.	CPOQS	Summer	95510	Compressor Pump Oil Summer 32oz
1 Quart - 32 fl. oz.	CPOQW	Winter	95520	Compressor Pump Oil Winter 32oz
1 Gallon - 128 fl. oz.	CPOGS	Summer	95515	Compressor Pump Oil 1gal
Compressor Engine Oil				
1 Quart - 32 fl. oz.	CEOQ	All Season	95500	Engine Oil 10w30 quart

NOTES







FASTENERS





DPS

21° Round Head Plastic Collated Strip Nails



Fasteners Collated Nails

BRIGHT				
Length	Dia	Shank	QTY	Part No.
1-1/2"	.148	SMOOTH	6 M	12210
2"	.113	SMOOTH	6 M	12015
2-1/4"	.120	SMOOTH	5 M	12020
2-1/4"	.148	RING	4 M	14863
2-1/4"	.148	RING	5 M	12223
2-1/4"	.148	SCREW	4 M	14864
2-1/4"	.148	SMOOTH	4 M	12099
2-3/8"	.113	RING	2 M	12044
2-3/8"	.113	RING	5 M	12030
2-3/8"	.113	SCREW	5 M	12035
2-3/8"	.113	SMOOTH	2 M	12041
2-3/8"	.113	SMOOTH	5 M	12025
2-3/8"	.148	RING	4 M	12232
2-3/8"	.148	SCREW	4 M	12236
2-3/8"	.148	SMOOTH	4 M	12052
2-3/8"	.148	SMOOTH	4 M	12226
2-1/2"	.131	RING	5 M	12051
2-1/2"	.131	SMOOTH	2 M	12162
2-1/2"	.131	SMOOTH	5 M	12050
2-3/4"	.120	SCREW	4 M	12073
3"	.120	RING	4 M	12064
3"	.120	SCREW	4 M	12063
3"	.120	SMOOTH	2 M	12059
3"	.120	SMOOTH	4 M	12060
3"	.131	RING	4 M	12074
3"	.131	SCREW	4 M	12075
3"	.131	SMOOTH	4 M	12070
3"	.148	SMOOTH	4 M	12300
3-1/4"	.120	SMOOTH	4 M	12110
3-1/4"	.131	SCREW	4 M	12117
3-1/4"	.131	SMOOTH	2 M	12126
3-1/4"	.131	SMOOTH	3 M	12145
3-1/4"	.131	SMOOTH	4 M	12115
3-1/4"	.131	SMOOTH	4 M	12116
3-1/4"	.148	SMOOTH	3 M	12343
3-1/2"	.131	SMOOTH	4 M	12148
3-1/2"	.135	SMOOTH	4 M	12152
3-1/2"	.162	SMOOTH	3 M	12158
3-3/4"	.131	SMOOTH	1.25 M	12149
5"	.148	SMOOTH	1.8 M	12160

ELECTRO GALVANIZED				
Length	Dia	Shank	QTY	Part No.
2"	.113	RING	6 M	12017
2"	.113	SMOOTH	6 M	12016
2-3/8"	.113	RING	5 M	12042
2-3/8"	.113	SMOOTH	5 M	12040
2-1/2"	.131	SMOOTH	5 M	12055
3"	.120	RING	4 M	12066
3"	.120	SCREW	4 M	12069
3"	.120	SMOOTH	4 M	12061
3"	.131	RING	4 M	12087
3"	.131	SMOOTH	4 M	12085
3-1/4"	.120	SCREW	4 M	12112
3-1/4"	.131	SCREW	4 M	12122
3-1/4"	.131	SMOOTH	4 M	12125



NSR83-21 PRO
Framing Nailer
Part No. 65730
See Page 10




NSR83-21 PRO
Framer
Framing Nailer
Part No. 65735
See Page 10





DPS

21° Round Head Plastic Collated Strip Nails



HOT GALVANIZED				
Length	Dia	Shank	QTY	Part No.
2"	.113	RING	2 M	12006
2"	.113	RING	6 M	12008
2-1/4"	.120	SCREW	2 M	13106
2-1/4"	.148	SMOOTH	4 M	10199
2-3/8"	.113	RING	2 M	12036
2-3/8"	.113	RING	5 M	12038
2-3/8"	.113	SMOOTH	2 M	12034
2-3/8"	.113	SMOOTH	5 M	12037
2-3/8"	.148	RING	4 M	12159
2-3/8"	.148	SMOOTH	4 M	12146
2-1/2"	.131	RING	5 M	12161
2-1/2"	.131	SMOOTH	4 M	12033
2-1/2"	.131	SMOOTH	5 M	12024
3"	.120	RING	2 M	12054
3"	.120	RING	4 M	12053
3"	.120	SCREW	4 M	12072
3"	.120	SMOOTH	4 M	12062
3"	.131	RING	2 M	12084
3"	.131	RING	4 M	12083
3"	.131	SMOOTH	2 M	12079
3"	.131	SMOOTH	4 M	12082
3"	.148	SMOOTH	4 M	12097
3-1/4"	.120	RING	2 M	12119
3-1/4"	.120	RING	4 M	12109
3-1/4"	.120	SCREW	2 M	12103
3-1/4"	.131	SCREW	2 M	12141
3-1/4"	.131	SCREW	4 M	12142
3-1/4"	.131	SMOOTH	2 M	12139
3-1/4"	.131	SMOOTH	4 M	12140
3-1/4"	.148	SMOOTH	3 M	12056
3-1/2"	.162	SMOOTH	3 M	12156

STAINLESS STEEL - 304				
Length	Dia	Shank	QTY	Part No.
2"	.113	RING	1 M	12005
2-3/8"	.113	RING	1 M	21054
3"	.120	RING	1 M	12012
3"	.120	RING	4 M	12067
3"	.131	RING	1 M	12078
3"	.131	SCREW	1 M	12077

STAINLESS STEEL - 316				
Length	Dia	Shank	QTY	Part No.
2"	.109	RING	1 M	12004
2-3/8"	.113	RING	1 M	12026
2-1/2"	.120	SCREW	1 M	12027
3"	.120	RING	1 M	12094
3"	.131	RING	1 M	12098
3"	.131	SCREW	1 M	12093
3-1/4"	.120	RING	1 M	12101
3-1/4"	.131	SCREW	1 M	12127

BRIGHT

Uncoated Steel Finish. Ideal for indoor projects.
Complies with ASTM F1667 Standards.

ELECTRO GALVANIZED

Limited Corrosion Protection.
Ideal for both Indoor & Light Outdoor use.
Complies with ASTM F1667 & A641 Standards.

ELECTRO GALVANIZED

Limited Corrosion Protection.
Ideal for both Indoor & Light Outdoor use.
Complies with ASTM F1667 & A641 Standards.

HOT GALVANIZED

High Corrosion Protection - ACQ Approved.
Ideal for outdoor & high-moisture environments.
Complies with ASTM F1667 & A153 Standards.

STAINLESS STEEL

High Corrosion Protection - ACQ Approved.
Ideal for outdoor & high-moisture environments.
Ideal for use in Cedar, Redwood and Treated Lumber.

ALUMINUM

High Corrosion Protection.
Ideal for specialty exterior projects.
Do not use in treated lumber.

These Interchange PRO nails are designed to fit most brands of tools.

Interchange PRO DPS nails are used for framing, decking, sheathing, subflooring, truss construction and more applications.

The coating on Hot Galvanized nails could be hot dipped zinc, hot dipped wire zinc or thermal diffused zinc. All hot galvanized nails comply with ASTM A153 standards.

Fasteners Collated Nails

30°-34°
PAPER TAPE

PT

30°-34° Clipped Head Paper Collated Nails



BRIGHT				
Length	Dia	Shank	QTY	Part No.
2"	.113	RING	5 M	10420
2"	.113	SMOOTH	5 M	10410
2-1/4"	.113	SMOOTH	1 M	10450
2-3/8"	.113	RING	2 M	10472
2-3/8"	.113	RING	5 M	10470
2-3/8"	.113	SMOOTH	2 M	10462
2-3/8"	.113	SMOOTH	5 M	10460
2-3/8"	.120	RING	5 M	10496
2-3/8"	.120	SMOOTH	5 M	10494
2-3/4"	.120	SMOOTH	2.5 M	13095
3"	.120	RING	2.5 M	10510
3"	.120	SMOOTH	2 M	10502
3"	.120	SMOOTH	2.5 M	10500
3"	.131	RING	2.5 M	10537
3"	.131	SMOOTH	2 M	10532
3"	.131	SMOOTH	2.5 M	10530
3-1/4"	.120	SMOOTH	2.5 M	10547
3-1/4"	.131	RING	2.5 M	10555
3-1/4"	.131	SMOOTH	2 M	10558
3-1/4"	.131	SMOOTH	2.5 M	10550
3-1/2"	.131	SMOOTH	2.5 M	10570

ELECTRO GALVANIZED				
Length	Dia	Shank	QTY	Part No.
2"	.113	RING	5 M	10440
2-3/8"	.113	RING	5 M	10490
2-3/8"	.113	SMOOTH	5 M	10480
3"	.120	RING	2.5 M	10520
3-1/4"	.120	RING	2.5 M	10548

HOT GALVANIZED				
Length	Dia	Shank	QTY	Part No.
2"	.113	RING	2 M	10780
2-3/8"	.113	RING	2 M	10784
2-3/8"	.113	RING	5 M	10495
2-3/8"	.113	SMOOTH	2 M	10782
2-3/8"	.113	SMOOTH	5 M	10485
2-3/8"	.120	RING	2 M	10788
2-3/8"	.120	RING	5 M	10492
3"	.120	RING	2 M	10790
3"	.120	RING	2.5 M	10525
3"	.131	RING	2.5 M	10546
3"	.131	SMOOTH	2 M	10792
3"	.131	SMOOTH	2.5 M	10545
3-1/4"	.120	RING	2 M	10793
3-1/4"	.120	RING	2.5 M	10549
3-1/4"	.131	RING	2 M	10796
3-1/4"	.131	RING	2.5 M	10567
3-1/4"	.131	SMOOTH	2 M	10794
3-1/4"	.131	SMOOTH	2.5 M	10565
3-1/2"	.131	RING	2 M	10799
3-1/2"	.131	SMOOTH	2 M	10798




The NSC90-34 PRO can be used for both PT and PTOR Fasteners.

These Interchange PRO nails are designed to fit most brands of tools. Interchange PRO PT and PTOR nails are used for framing, decking, sheathing, siding, fencing and truss construction.

30°-34°
PAPER TAPE

PTOR

30°-34° Offset Round Head Paper Collated Nails



BRIGHT

Length	Dia	Shank	QTY	Part No.
2"	.113	SMOOTH	5.5 M	54383
2-3/8"	.113	RING	5 M	10683
2-3/8"	.113	SMOOTH	5 M	10681
2-1/2"	.131	SMOOTH	2.5 M	10707
2-3/4"	.120	SMOOTH	3 M	10708
3"	.120	SMOOTH	2.5 M	10686
3"	.131	SMOOTH	2.5 M	10694
3-1/4"	.120	RING	2.5 M	10805
3-1/4"	.131	SMOOTH	2.5 M	10699

HOT GALVANIZED

Length	Dia	Shank	QTY	Part No.
2"	.113	RING	2 M	10800
2-3/8"	.113	RING	2 M	10802
2-3/8"	.113	SMOOTH	5 M	10682
3"	.120	RING	2 M	10804
3"	.120	RING	2.5 M	10692
3"	.131	SMOOTH	2 M	54382
3"	.148	SMOOTH	2 M	50141
3-1/4"	.131	RING	2 M	10808
3-1/2"	.131	SMOOTH	2 M	54381



The coating on Hot Galvanized nails could be hot dipped zinc, hot dipped wire zinc or thermal diffused zinc. All hot galvanized nails comply with ASTM A153 standards.

STAINLESS STEEL - 304

Length	Dia	Shank	QTY	Part No.
2-3/8"	.113	RING	1 M	10679
3"	.120	RING	1 M	10693
3-1/4"	.120	RING	1 M	10701



BRIGHT

Uncoated Steel Finish. Ideal for indoor projects.
Complies with ASTM F1667 Standards.

ELECTRO GALVANIZED

Limited Corrosion Protection.
Ideal for both Indoor & Light Outdoor use.
Complies with ASTM F1667 & A641 Standards.

ELECTRO GALVANIZED

Limited Corrosion Protection.
Ideal for both Indoor & Light Outdoor use.
Complies with ASTM F1667 & A641 Standards.

HOT GALVANIZED

High Corrosion Protection - ACQ Approved.
Ideal for outdoor & high-moisture environments.
Complies with ASTM F1667 & A153 Standards.

STAINLESS STEEL

High Corrosion Protection - ACQ Approved.
Ideal for outdoor & high-moisture environments.
Ideal for use in Cedar, Redwood and Treated Lumber.

ALUMINUM

High Corrosion Protection.
Ideal for specialty exterior projects.
Do not use in treated lumber.


Fasteners

Collated Nails



BW

28° Clipped Head - Wire Strip Collated Nails

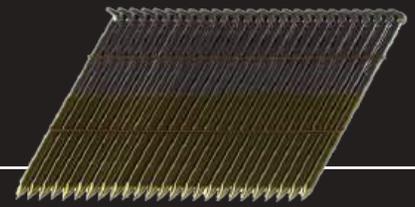

BRIGHT				
Length	Dia	Shank	QTY	Part No.
2"	.113	SMOOTH	2 M	10011
2-3/8"	.113	RING	2 M	10051
2-3/8"	.113	SMOOTH	2 M	10041
3"	.120	SMOOTH	2 M	10081
3"	.131	SMOOTH	2 M	10101
3-1/4"	.120	SMOOTH	2 M	10121
3-1/4"	.131	SMOOTH	2 M	10131
3-1/2"	.131	SMOOTH	2 M	10151

ELECTRO GALVANIZED				
Length	Dia	Shank	QTY	Part No.
2-3/8"	.113	SMOOTH	2 M	10061
3"	.131	SMOOTH	2 M	10111

HOT GALVANIZED				
Length	Dia	Shank	QTY	Part No.
2"	.113	RING	2 M	10035
2-3/8"	.113	RING	2 M	10077
3"	.120	RING	2 M	10099
3-1/4"	.131	RING	2 M	10143



Find our Interchange PRO Air Hose on page 14.

These Interchange PRO nails are designed to fit most brands of tools.

Interchange PRO BW nails are used for framing, subflooring, decking, sheathing, siding, truss construction and framing applications.




NSC83-28 PRO
Framing Nailer
 Part No. 65740
See Page 10



PTJH

34° Round Head Paper Tape Collated Joist Nails

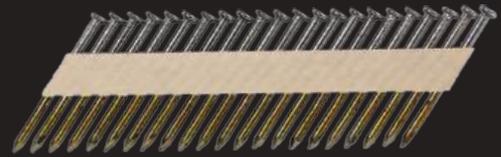

BRIGHT				
Length	Dia	Shank	QTY	Part No.
1-1/2"	.131	SMOOTH	4 M	10605
1-1/2"	.148	SMOOTH	1 M	10589
1-1/2"	.148	SMOOTH	3 M	10610
2-1/2"	.131	SMOOTH	2.5 M	10618
2-1/2"	.148	SMOOTH	2.5 M	10620
2-1/2"	.162	SMOOTH	2 M	10616

ELECTRO GALVANIZED				
Length	Dia	Shank	QTY	Part No.
1-1/2"	.131	SMOOTH	4 M	10604
1-1/2"	.148	SMOOTH	3 M	10609



NSJH38-34 PRO
Joist Hanger Nailer
 Part No. 65755
See Page 10



NSJH64-34 PRO
Joist Hanger Nailer
 Part No. 65760
See Page 10



HOT GALVANIZED				
Length	Dia	Shank	QTY	Part No.
1-1/2"	.131	SMOOTH	4 M	10606
1-1/2"	.148	SMOOTH	1 M	10590
1-1/2"	.148	SMOOTH	3 M	10608
2-1/2"	.148	SMOOTH	2.5 M	10612
2-1/2"	.162	SMOOTH	2 M	10617

Interchange PRO PTJH nails are used for joist hanging and metal connector installation applications.

The coating on Hot Galvanized nails could be hot dipped zinc, hot dipped wire zinc or thermal diffused zinc. All hot galvanized nails comply with ASTM A153 standards.



BRIGHT
 Uncoated Steel Finish. Ideal for indoor projects.
 Complies with ASTM F1667 Standards.

ELECTRO GALVANIZED
 Limited Corrosion Protection.
 Ideal for both Indoor & Light Outdoor use.
 Complies with ASTM F1667 & A641 Standards.

ELECTRO GALVANIZED
 Limited Corrosion Protection.
 Ideal for both Indoor & Light Outdoor use.
 Complies with ASTM F1667 & A641 Standards.

HOT GALVANIZED
 High Corrosion Protection - ACQ Approved.
 Ideal for outdoor & high-moisture environments.
 Complies with ASTM F1667 & A153 Standards.

STAINLESS STEEL
 High Corrosion Protection - ACQ Approved.
 Ideal for outdoor & high-moisture environments.
 Ideal for use in Cedar, Redwood and Treated Lumber.

ALUMINUM
 High Corrosion Protection.
 Ideal for specialty exterior projects.
 Do not use in treated lumber.

Fasteners
Collated Nails



HWCF

15° Round Head - Wire Coil Collated Nails



BRIGHT					
Pitch	Length	Dia	Shank	QTY	Part No.
6.8	1-1/4"	.083	RING	16 M	16060
6.8	1-1/4"	.083	SMOOTH	14 M	16057
6.8	1-1/4"	.086	RING	10.5 M	16058
6.8	1-1/4"	.086	SCREW	10.5 M	16071
8.0	1-1/4"	.099	RING	9 M	16279
6.8	1-1/2"	.083	RING	14 M	80241
6.8	1-1/2"	.083	RING	16 M	16061
6.8	1-1/2"	.086	RING	10.5 M	16077
6.8	1-1/2"	.086	SCREW	10.5 M	16072
6.8	1-1/2"	.092	SCREW	9 M	16714
8.0	1-1/2"	.099	SCREW	14.4 M	38582
8.0	1-1/2"	.099	SMOOTH	12 M	16396
8.0	1-1/2"	.113	SMOOTH	4.5 M	16342
6.8	1-3/4"	.083	RING	16 M	16062
6.8	1-3/4"	.086	RING	10.5 M	14163
6.8	1-3/4"	.086	SCREW	10.5 M	16083
6.8	1-3/4"	.086	SCREW	14 M	16486
6.8	1-3/4"	.086	SCREW	14 M	16095
8.0	1-3/4"	.099	SCREW	12 M	16112
8.0	1-3/4"	.099	SCREW	9 M	16110
8.0	1-3/4"	.099	SCREW	9 M	16111
6.8	2"	.086	SCREW	9 M	16092
8.0	2"	.092	SCREW	9 M	16183
6.8	2"	.092	SCREW	9 M	16094
8.0	2"	.099	RING	9 M	16271
8.0	2"	.099	RING	9 M	19776
8.0	2"	.099	SCREW	9 M	16115
8.0	2"	.099	SCREW	9 M	16116
8.0	2"	.113	RING	3 M	16517
8.0	2"	.113	RING	9 M	16501
8.0	2"	.113	SCREW	9 M	16537
6.8	2-1/4"	.090	RING	9 M	16190
8.0	2-1/4"	.099	RING	9 M	13101
8.0	2-1/4"	.099	SCREW	9 M	16119
8.0	2-1/4"	.099	SCREW	9 M	16120
8.0	2-1/4"	.113	SCREW	6.75 M	16197
8.0	2-1/4"	.113	SCREW	9 M	16141
8.0	2-1/4"	.113	SMOOTH	4.5 M	16239
8.0	2-3/8"	.113	RING	3 M	16535
8.0	2-3/8"	.113	RING	4.5 M	16198
8.0	2-3/8"	.113	RING	5 M	16177
8.0	2-3/8"	.113	SMOOTH	5 M	16240

BRIGHT (Cont.)					
Pitch	Length	Dia	Shank	QTY	Part No.
8.0	2-1/2"	.099	RING	9 M	16132
8.0	2-1/2"	.099	SCREW	9 M	16128
8.0	2-1/2"	.099	SCREW	9 M	16125
8.0	2-1/2"	.113	SCREW	6 M	16138
8.0	2-1/2"	.113	SCREW	6 M	16237
8.0	2-1/2"	.131	RING	4.5 M	16444
8.0	2-1/2"	.131	SCREW	4.5 M	16431
8.0	2-1/2"	.131	SMOOTH	4.2 M	14162
8.0	2-1/2"	.131	SMOOTH	4.5 M	16439
8.0	2-1/2"	.131	SMOOTH	5.6 M	14113
8.0	2-1/2"	.148	SMOOTH	4 M	16454
8.0	2-3/4"	.099	SCREW	5 M	16254
8.0	2-3/4"	.099	SCREW	5 M	16251
8.0	2-3/4"	.113	RING	4.5 M	16522
8.0	2-3/4"	.113	RING	6.75 M	16903
8.0	2-3/4"	.113	SCREW	4.5 M	16453
8.0	2-3/4"	.120	RING	4.5 M	16250
8.0	2-3/4"	.120	RING	4.5 M	19772
8.0	2-3/4"	.120	SCREW	4.5 M	16246
8.0	3"	.113	SCREW	5 M	16255
8.0	3"	.113	SCREW	5.4 M	48715
8.0	3"	.120	RING	4 M	16262
8.0	3"	.120	RING	4.5 M	16451
8.0	3"	.120	RING	4.5 M	16227
8.0	3"	.120	SCREW	4 M	16170
8.0	3"	.120	SCREW	4.5 M	16169
8.0	3"	.120	SMOOTH	2.5 M	16450
8.0	3"	.120	SMOOTH	4.5 M	16153
8.0	3"	.131	SMOOTH	2.5 M	16460
8.0	3"	.131	SMOOTH	4.2 M	16263
8.0	3"	.131	SMOOTH	4.5 M	16260
8.0	3"	.135	RING	4.5 M	16277
8.0	3"	.135	SMOOTH	4.5 M	16280
8.0	3-1/4"	.120	SCREW	4.5 M	16462
8.0	3-1/4"	.120	SMOOTH	4 M	16164
8.0	3-1/4"	.131	SMOOTH	4 M	16474
8.0	3-1/2"	.120	SCREW	2.5 M	19778
8.0	3-1/2"	.131	SCREW	2.5 M	16471
8.0	3-1/2"	.131	SCREW	4 M	16525
8.0	4"	.131	SCREW	4.5 M	13096
8.0	4"	.131	SMOOTH	3 M	16825



HWCF

15° Round Head - Wire Coil Collated Nails



ELECTRO GALVANIZED

Pitch	Length	Dia	Shank	QTY	Part No.
6.8	1-3/4"	.086	SCREW	10.5 M	16285
8.0	1-3/4"	.099	SCREW	9 M	16234
8.0	2"	.099	SCREW	9 M	16527
8.0	2-1/4"	.099	SCREW	9 M	16163
8.0	2-3/8"	.113	RING	4.5 M	16249
8.0	2-3/8"	.113	RING	5 M	16134
8.0	2-3/8"	.113	SMOOTH	3 M	16442
8.0	2-3/8"	.113	SMOOTH	5 M	16268
8.0	2-1/2"	.099	SCREW	9 M	16287
8.0	2-1/2"	.131	RING	4 M	16229
8.0	2-1/2"	.131	RING	4.5 M	16235
8.0	2-1/2"	.131	SCREW	4.5 M	16283
8.0	2-1/2"	.131	SMOOTH	4.5 M	16113
8.0	2-3/4"	.099	SCREW	5 M	16284
8.0	2-3/4"	.113	SCREW	4.5 M	16282
8.0	3"	.113	SCREW	5 M	16281
8.0	3"	.120	RING	4.5 M	16286
8.0	3"	.120	RING	4.5 M	16201
8.0	3"	.120	SCREW	4.5 M	16193
8.0	3"	.120	SMOOTH	4.5 M	16180
8.0	3"	.131	SMOOTH	4.5 M	16289
8.0	3-1/4"	.120	SMOOTH	4 M	16288
8.0	3-1/4"	.131	SMOOTH	4 M	16478
8.0	3-1/2"	.131	RING	4.5 M	13100

ELECTRO GALVANIZED

Pitch	Length	Dia	Shank	QTY	Part No.
6.8	1-1/2"	.083	RING	16 M	16064
6.8	1-3/4"	.083	RING	16 M	16089
6.8	1-3/4"	.083	RING	16 M	16076
6.8	1-3/4"	.086	RING	10.5 M	16084
6.8	1-3/4"	.090	RING	9 M	14683
8.0	1-3/4"	.092	RING	3.6 M	16066
6.8	1-3/4"	.092	RING	3.6 M	16906
8.0	1-3/4"	.092	RING	9 M	16727
8.0	1-3/4"	.099	RING	9 M	16220
8.0	1-3/4"	.099	SMOOTH	9 M	16518
6.8	2"	.086	RING	10.5 M	13098
8.0	2"	.092	RING	3.6 M	16747
8.0	2"	.092	RING	9 M	16771
8.0	2"	.092	SMOOTH	3.6 M	16735
8.0	2"	.092	SMOOTH	9 M	16748
8.0	2"	.099	RING	1 M	16276
8.0	2"	.099	RING	9 M	16114
6.8	2-1/4"	.090	RING	9 M	16749
8.0	2-1/4"	.092	RING	3.6 M	16764
6.8	2-1/4"	.092	RING	3.6 M	16905
8.0	2-1/4"	.092	SMOOTH	3.6 M	16753
8.0	2-1/4"	.092	SMOOTH	9 M	16760
8.0	2-3/8"	.099	RING	9 M	16127
8.0	2-3/8"	.099	SMOOTH	9 M	16130

These Interchange PRO nails are designed to fit most brands of tools.

Interchange PRO HWCF and MWCL nails are used for siding, fencing, decking, shingles, subflooring, pallets and crafting.

HWCF Listing Continued on Next Page ...



BRIGHT
 Uncoated Steel Finish. Ideal for indoor projects.
 Complies with ASTM F1667 Standards.

ELECTRO GALVANIZED
 Limited Corrosion Protection.
 Ideal for both Indoor & Light Outdoor use.
 Complies with ASTM F1667 & A641 Standards.

ELECTRO GALVANIZED
 Limited Corrosion Protection.
 Ideal for both Indoor & Light Outdoor use.
 Complies with ASTM F1667 & A641 Standards.

Fasteners
Collated Nails



HWCF

15° Round Head - Wire Coil Collated Nails



HOT GALVANIZED					
Pitch	Length	Dia	Shank	QTY	Part No.
8.0	1-1/4"	.092	RING	3.6 M	16063
8.0	1-1/2"	.092	RING	3.6 M	16720
6.8	1-3/4"	.086	RING	10.5 M	16736
8.0	1-3/4"	.092	RING	3.6 M	16745
8.0	1-3/4"	.092	RING	6 M	13102
8.0	1-3/4"	.099	RING	9 M	16521
6.8	2"	.090	RING	3.6 M	16082
8.0	2"	.092	RING	3.6 M	16743
8.0	2"	.092	RING	9 M	13103
8.0	2"	.099	RING	4.5 M	16272
8.0	2"	.099	RING	9 M	16172
8.0	2-1/4"	.092	RING	3.6 M	16766
8.0	2-1/4"	.092	SMOOTH	3.6 M	16761
8.0	2-3/8"	.113	RING	4 M	16211
8.0	2-1/2"	.092	RING	3.6 M	16770

STAINLESS STEEL - 304					
Pitch	Length	Dia	Shank	QTY	Part No.
6.8	1-1/2"	.092	RING	1 M	16898
8.0	1-1/2"	.092	RING	3.6 M	16723
6.8	1-3/4"	.083	RING	3.6 M	80314
8.0	1-3/4"	.092	RING	3.6 M	16733
8.0	1-3/4"	.099	RING	9 M	16513
8.0	2"	.092	RING	3.6 M	19107
8.0	2-1/4"	.092	RING	3.6 M	16768
8.0	2-1/2"	.092	RING	3.6 M	16762

STAINLESS STEEL - 316					
Pitch	Length	Dia	Shank	QTY	Part No.
6.8	1-3/4"	.086	RING	3.6 M	16232
8.0	2"	.099	RING	3.6 M	16233
6.8	2-1/4"	.090	RING	3.6 M	16231




HOT GALVANIZED (Cont.)					
Pitch	Length	Dia	Shank	Qty	Part No.
8.0	2-1/2"	.131	RING	4.5 M	16228
8.0	2-1/2"	.131	SMOOTH	4.5 M	16135
8.0	3"	.120	RING	4 M	16179
8.0	3"	.120	RING	4.5 M	16257
8.0	3"	.120	SCREW	4 M	16458
8.0	3"	.120	SCREW	4.5 M	16256
8.0	3"	.120	SMOOTH	2.5 M	16195
8.0	3"	.131	RING	4.5 M	14279
8.0	3"	.131	SCREW	4 M	14277
8.0	3"	.131	SMOOTH	4.2 M	14278
8.0	3"	.131	SMOOTH	4.5 M	16265
8.0	3-1/4"	.131	RING	2.5 M	16491
8.0	3-1/4"	.131	SMOOTH	4 M	16464
8.0	3-1/2"	.131	RING	4.5 M	13116

These Interchange PRO nails are designed to fit most brands of tools.

Interchange PRO HWCF and MWCL nails are used for siding, fencing, decking, shingles, subflooring, pallets and crafting.


The coating on Hot Galvanized nails could be hot dipped zinc, hot dipped wire zinc or thermal diffused zinc. All hot galvanized nails comply with ASTM A153 standards.

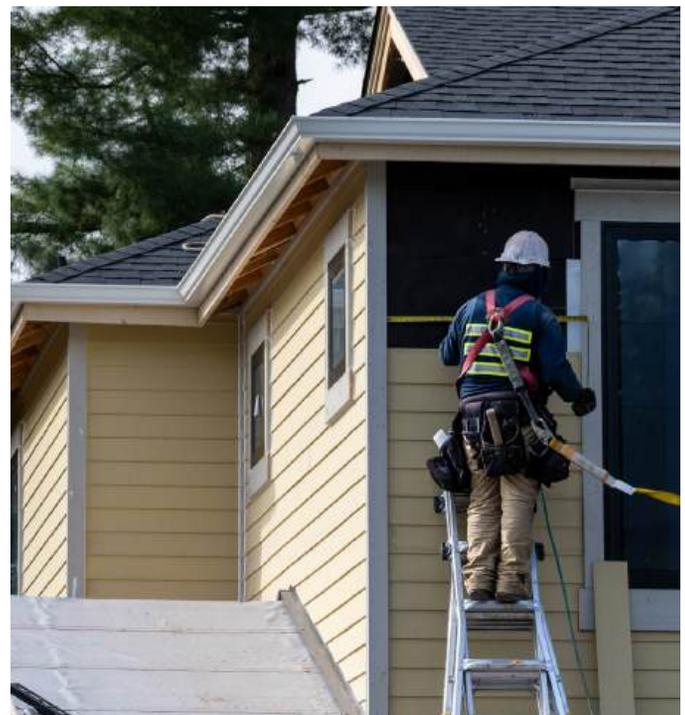



MWCL

15° Round Head - Wire Coil - Large Coil Collated Nails



BRIGHT				
Length	Dia	Shank	QTY	Part No.
1-1/4"	.083	RING	14 M	16729
1-1/2"	.099	SCREW	9 M	16786
1-5/8"	.099	SMOOTH	9 M	13094
1-3/4"	.086	RING	4.5 M	16772
1-3/4"	.086	SCREW	9 M	16779
1-3/4"	.099	SCREW	9 M	16788
1-3/4"	.099	SCREW	9 M	16789
2"	.099	RING	8.4 M	16811
2"	.099	RING	9 M	16793
2"	.099	SCREW	9 M	16795
2"	.099	SCREW	9 M	16790
2"	.113	SMOOTH	7.5 M	19766
2-1/4"	.099	RING	9 M	16801
2-1/4"	.099	SCREW	9 M	16792
2-3/8"	.113	RING	5 M	13092
2-1/2"	.099	RING	9 M	16904
2-1/2"	.099	SCREW	9 M	16807
2-1/2"	.113	RING	5 M	16802
2-1/2"	.131	RING	5 M	16808
2-1/2"	.131	SMOOTH	4.5 M	18355
2-3/4"	.120	RING	4 M	16901
2-3/4"	.131	SMOOTH	5 M	16812
3"	.120	RING	4 M	16815
3"	.120	SCREW	4.5 M	16813
3-1/4"	.131	SMOOTH	4 M	16820
3-1/2"	.131	RING	4.5 M	13097

HOT GALVANIZED				
Length	Dia	Shank	QTY	Part No.
1-1/2"	.090	RING	14 M	16731
1-3/4"	.090	RING	9 M	16777
2-1/2"	.131	RING	5 M	13090
2-1/2"	.131	SMOOTH	4 M	16804
2-3/4"	.131	SMOOTH	5 M	16814
3"	.131	RING	4 M	13107
3"	.148	SMOOTH	3 M	13089
3-1/4"	.131	SMOOTH	4 M	16824
3-1/4"	.131	SMOOTH	5 M	13088

STAINLESS STEEL - 304				
Length	Dia	Shank	QTY	Part No.
1-1/2"	.086	RING	16 M	16717
1-1/2"	.092	RING	9 M	16778



BRIGHT
 Uncoated Steel Finish. Ideal for indoor projects.
 Complies with ASTM F1667 Standards.

ELECTRO GALVANIZED
 Limited Corrosion Protection.
 Ideal for both Indoor & Light Outdoor use.
 Complies with ASTM F1667 & A641 Standards.

ELECTRO GALVANIZED
 Limited Corrosion Protection.
 Ideal for both Indoor & Light Outdoor use.
 Complies with ASTM F1667 & A641 Standards.

HOT GALVANIZED
 High Corrosion Protection - ACQ Approved.
 Ideal for outdoor & high-moisture environments.
 Complies with ASTM F1667 & A153 Standards.

STAINLESS STEEL
 High Corrosion Protection - ACQ Approved.
 Ideal for outdoor & high-moisture environments.
 Ideal for use in Cedar, Redwood and Treated Lumber.


ALUMINUM
 High Corrosion Protection.
 Ideal for specialty exterior projects.
 Do not use in treated lumber.

Fasteners
Collated Nails



MPC

15° Round Head - Plastic Sheet Collated Nails



ELECTRO GALVANIZED				
Length	Dia	Shank	QTY	Part No.
1-7/8"	.099	SMOOTH	6 M	16849

ELECTRO GALVANIZED				
Length	Dia	Shank	QTY	Part No.
2-1/4"	.092	SMOOTH	4.8 M	16858

HOT GALVANIZED				
Length	Dia	Shank	QTY	Part No.
1-3/4"	.092	RING	6 M	16862
2"	.092	RING	6 M	16847
2"	.092	SMOOTH	6 M	16846
2-1/4"	.092	RING	4.8 M	16861
2-1/4"	.092	SMOOTH	4.8 M	16860
2-1/2"	.092	RING	4.8 M	16880
2-1/2"	.092	SMOOTH	4.8 M	16878

STAINLESS STEEL - 304				
Length	Dia	Shank	QTY	Part No.
2"	.092	RING	6 M	16864



These Interchange PRO nails are designed to fit most brands of tools.

Interchange PRO MPC nails are used for siding, fencing, shingle and decking applications.



CN565-15 PRO
Siding Nailer
 Part No. 65765
See Page 10


Collated Nails

Fasteners



DPC

0° Round Head Plastic Sheet Collated Nails



BRIGHT				
Length	Dia	Shank	QTY	Part No.
1-1/2"	.105	SMOOTH	10.8 M	14006
2"	.099	SCREW	9 M	14020
2-1/4"	.099	SCREW	7.2 M	14032
4-1/2"	.148	SMOOTH	1.8 M	14045
5"	.148	SMOOTH	1.8 M	14036

ELECTRO GALVANIZED				
Length	Dia	Shank	QTY	Part No.
1-3/4"	.092	RING	10.8 M	16838
1-7/8"	.092	RING	9 M	14009
1-7/8"	.092	SMOOTH	9 M	14008
2-1/4"	.092	RING	7.2 M	14048
2-1/4"	.092	SMOOTH	7.2 M	14047
2-1/4"	.099	RING	7.2 M	14034

HOT GALVANIZED				
Length	Dia	Shank	QTY	Part No.
1-7/8"	.086	RING	3.6 M	14016
2-1/4"	.092	SMOOTH	3.6 M	14033
2-1/2"	.092	SMOOTH	4 M	14049

STAINLESS STEEL - 304				
Length	Dia	Shank	QTY	Part No.
1-7/8"	.086	RING	3.6 M	14018
1-7/8"	.099	RING	7.2 M	14011
2-1/4"	.099	RING	7.2 M	14012

These Interchange PRO nails are designed to fit most brands of tools. Interchange PRO DPC nails are used for siding, fencing, shingle and decking applications.



BRIGHT
Uncoated Steel Finish. Ideal for indoor projects.
Complies with ASTM F1667 Standards.

ELECTRO GALVANIZED
Limited Corrosion Protection.
Ideal for both Indoor & Light Outdoor use.
Complies with ASTM F1667 & A641 Standards.

ELECTRO GALVANIZED
Limited Corrosion Protection.
Ideal for both Indoor & Light Outdoor use.
Complies with ASTM F1667 & A641 Standards.

HOT GALVANIZED
High Corrosion Protection - ACQ Approved.
Ideal for outdoor & high-moisture environments.
Complies with ASTM F1667 & A153 Standards.

STAINLESS STEEL
High Corrosion Protection - ACQ Approved.
Ideal for outdoor & high-moisture environments.
Ideal for use in Cedar, Redwood and Treated Lumber.

ALUMINUM
High Corrosion Protection.
Ideal for specialty exterior projects.
Do not use in treated lumber.

Fasteners
Collated Nails



DPRC

20° Round Head - Plastic Rope Coil Collated Nails



HOT GALVANIZED				
Length	Dia	Shank	QTY	Part No.
1-3/4"	.086	SCREW	12.8 M	52033
1-7/8"	.086	RING	12.8 M	52024

STAINLESS STEEL - 304				
Length	Dia	Shank	QTY	Part No.
1-7/8"	.086	RING	12.8 M	52023

These Interchange PRO nails are designed to fit most brands of tools. Interchange PRO DPRC nails are used for siding, fencing, shingle and decking applications.



CN50-20 PRO Plastic Coil Nailer

Part No. 65781

See Page 10



BRIGHT
Uncoated Steel Finish. Ideal for indoor projects.
Complies with ASTM F1667 Standards.

ELECTRO GALVANIZED
Limited Corrosion Protection.
Ideal for both Indoor & Light Outdoor use.
Complies with ASTM F1667 & A641 Standards.

ELECTRO GALVANIZED
Limited Corrosion Protection.
Ideal for both Indoor & Light Outdoor use.
Complies with ASTM F1667 & A641 Standards.

HOT GALVANIZED
High Corrosion Protection - ACQ Approved.
Ideal for outdoor & high-moisture environments.
Complies with ASTM F1667 & A153 Standards.

STAINLESS STEEL
High Corrosion Protection - ACQ Approved.
Ideal for outdoor & high-moisture environments.
Ideal for use in Cedar, Redwood and Treated Lumber.

ALUMINUM
High Corrosion Protection.
Ideal for specialty exterior projects.
Do not use in treated lumber.



CR

15° Wire Coil Collated Roofing Nails



ELECTRO GALVANIZED

Length	Dia	Shank	QTY	Part No.
3/4"	.120	SMOOTH	7.2 M	16005
7/8"	.120	SMOOTH	7.2 M	16010
1"	.120	SMOOTH	7.2 M	16020
1-1/4"	.120	RING	1 M	16033
1-1/4"	.120	RING	7.2 M	16035
1-1/4"	.120	SMOOTH	7.2 M	16030
1-1/2"	.120	RING	7.2 M	16042
1-1/2"	.120	SMOOTH	7.2 M	16040
1-3/4"	.120	RING	1 M	16052
1-3/4"	.120	SMOOTH	7.2 M	16050

HOT GALVANIZED

Length	Dia	Shank	QTY	Part No.
3/4"	.120	SMOOTH	7.2 M	16006
7/8"	.120	SMOOTH	7.2 M	19104
1"	.120	SMOOTH	7.2 M	16021
1-1/4"	.120	RING	7.2 M	16036
1-1/4"	.120	SMOOTH	7.2 M	16031
1-1/2"	.120	RING	7.2 M	16039
1-1/2"	.120	SMOOTH	7.2 M	16041
1-3/4"	.120	RING	7.2 M	16049
1-3/4"	.120	SMOOTH	7.2 M	16051
1-3/4"	.120	SMOOTH	7.2 M	16046

STAINLESS STEEL - 304

Length	Dia	Shank	QTY	Part No.
3/4"	.120	RING	7.2 M	19106
7/8"	.120	RING	7.2 M	16529
1"	.120	RING	7.2 M	16530
1-1/4"	.120	RING	7.2 M	16037
1-1/2"	.120	RING	7.2 M	16533
1-3/4"	.120	RING	3.6 M	16045
1-3/4"	.120	RING	7.2 M	16534



CRN4500 PRO
Roofing Nailer

Part No. 65750

See Page 10



Fasteners

Collated Nails

Interchange PRO CR nails are used for asphalt and fiberglass shingles, roofing felt, foam and fiberboard sheathing and installation board.

The coating on Hot Galvanized nails could be hot dipped zinc, hot dipped wire zinc or thermal diffused zinc. All hot galvanized nails comply with ASTM A153 standards.



BA

25° Angled Finish Brads



DA

34° Angled Finish Brads

ELECTRO GALVANIZED				
Length	Gauge	POINT	QTY	Part No.
1-1/2"	15ga	CHISEL	3.5 M	22040
2"	15ga	CHISEL	3.5 M	22060
2-1/4"	15ga	CHISEL	3.5 M	22070
2-1/2"	15ga	CHISEL	3.5 M	22080
2-1/2"	15ga	CHISEL	5 M	22170

These Interchange PRO fasteners are designed to fit most brands of tools.

BRIGHT				
Length	Gauge	POINT	QTY	Part No.
1"	15ga	CHISEL	4 M	22115
1-1/4"	15ga	CHISEL	4 M	22125
1-1/4"	15ga	CHISEL	4 M	24110 *
1-1/2"	15ga	CHISEL	4 M	22135
1-1/2"	15ga	CHISEL	4 M	24115 *
1-3/4"	15ga	CHISEL	4 M	22145
2"	15ga	CHISEL	4 M	22155
2"	15ga	CHISEL	4 M	24130 *
2-1/4"	15ga	CHISEL	4 M	22165
2-1/2"	15ga	CHISEL	4 M	22175
2-1/2"	15ga	CHISEL	4 M	24145 *

ELECTRO GALVANIZED				
Length	Gauge	POINT	QTY	Part No.
1-1/2"	15ga	CHISEL	4 M	22136
1-3/4"	15ga	CHISEL	4 M	22146
2"	15ga	CHISEL	4 M	22156
2"	15ga	CHISEL	4 M	24135 *
2-1/2"	15ga	CHISEL	4 M	22176
2-1/2"	15ga	CHISEL	4 M	24150 *

STAINLESS STEEL - 304				
Length	Gauge	POINT	QTY	Part No.
2"	15ga	CHISEL	4 M	22163
2-1/2"	15ga	CHISEL	4 M	22177

* Industrial Fasteners feature a higher tensile strength



Fasteners Collated Finish



PB

Medium Head Finish Nails



MP

23 Gauge Micro Pins

ELECTRO GALVANIZED

Length	Gauge	POINT	QTY	Part No.
7/8"	16ga	CHISEL	2.5 M	21207
1"	16ga	CHISEL	2.5 M	21211
1-1/4"	16ga	CHISEL	2.5 M	21231
1-1/2"	16ga	CHISEL	2.5 M	21241
1-3/4"	16ga	CHISEL	2.5 M	21251
2"	16ga	CHISEL	2.5 M	21261
2-1/4"	16ga	CHISEL	2.5 M	21271
2-1/2"	16ga	CHISEL	2.5 M	21281
3"	16ga	CHISEL	2.5 M	21206

STAINLESS STEEL - 304

Length	Gauge	POINT	QTY	Part No.
2"	16ga	CHISEL	2.5 M	21262
2-1/2"	16ga	CHISEL	2.5 M	21282

BRIGHT

Uncoated Steel Finish. Ideal for indoor projects.
Complies with ASTM F1667 Standards.

ELECTRO GALVANIZED

Limited Corrosion Protection.
Ideal for both indoor and light outdoor use.
Complies with ASTM F1667 & A641 Standards.

STAINLESS STEEL

High corrosion protection - ACQ Approved.
Ideal for outdoor & high-moisture environments.
Ideal for use in Cedar, Redwood and Treated Lumber.

ELECTRO GALVANIZED

Length	Gauge	POINT	QTY	Part No.
1/2"	23ga	DIAMOND	10 M	23220 *
5/8"	23ga	DIAMOND	10 M	23225 *
3/4"	23ga	DIAMOND	10 M	23219 *
1"	23ga	DIAMOND	10 M	23234 *
1-3/16"	23ga	DIAMOND	10 M	23235 *
1-1/4"	23ga	DIAMOND	10 M	23236 *
1-3/8"	23ga	DIAMOND	10 M	23238 *

* Industrial Fasteners feature a higher tensile strength



Fasteners
Collated Finish



FN250 PRO
Finish Nailer
Part No. 65775
See Page 11

18_{GA}
BRAD NAIL

PX / PY / PZ

Finish Nails

PX Finish Nails

18 Gauge Medium Head Brads

ELECTRO GALVANIZED				
Length	Gauge	POINT	QTY	Part No.
1/2"	18ga	CHISEL	5 M	23110
5/8"	18ga	CHISEL	5 M	23120
3/4"	18ga	CHISEL	5 M	23130
3/4"	18ga	CHISEL	5 M	22213
7/8"	18ga	CHISEL	5 M	23140
1"	18ga	CHISEL	5 M	23150
1-3/16"	18ga	CHISEL	5 M	23160
1-1/4"	18ga	CHISEL	5 M	23170
1-1/2"	18ga	CHISEL	5 M	23180
1-5/8"	18ga	CHISEL	5 M	23188
1-3/4"	18ga	CHISEL	5 M	23190
2"	18ga	CHISEL	5 M	23195



PY Finish Nails

18 Gauge Slight Head Brads

ELECTRO GALVANIZED				
Length	Gauge	POINT	QTY	Part No.
5/8"	18ga	CHISEL	5 M	23020
3/4"	18ga	CHISEL	5 M	23030
1"	18ga	CHISEL	5 M	23050

PZ Finish Nails

18 Gauge Headless Pins

ELECTRO GALVANIZED				
Length	Gauge	POINT	QTY	Part No.
1/2"	18ga	CHISEL	5 M	23200 *

* Industrial Fasteners feature a higher tensile strength

These Interchange PRO nails are designed to fit most brands of tools.

BRIGHT

Uncoated Steel Finish. Ideal for indoor projects.
Complies with ASTM F1667 Standards.

ELECTRO GALVANIZED


Limited Corrosion Protection.
Ideal for both indoor and light outdoor use.
Complies with ASTM F1667 & A641 Standards.

STAINLESS STEEL

High corrosion protection - ACQ Approved.
Ideal for outdoor & high-moisture environments.
Ideal for use in Cedar, Redwood and Treated Lumber.

Fine Wire Staples

20 - 22 Gauge

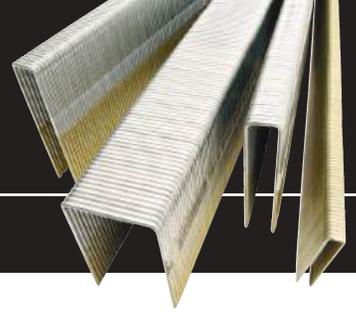

A Series

22 Gauge - 3/16" Crown
1/4" - 1/2" Leg

Length	Crown	POINT	QTY	Part No.
3/8"	3/16"	CHISEL	10 M	30007



B Series

22 Gauge - 1/2" Crown
1/4" - 1/2" Leg

Length	Crown	POINT	QTY	Part No.
1/4"	1/2"	CHISEL	10 M	30018
3/8"	1/2"	CHISEL	10 M	30020
1/2"	1/2"	CHISEL	10 M	30030



C Series


22 Gauge - 3/8" Crown
5/32" - 5/8" Leg

Length	Crown	POINT	QTY	Part No.
3/16"	3/8"	CHISEL	10 M	30305
1/4"	3/8"	CHISEL	10 M	30306
3/8"	3/8"	CHISEL	10 M	30309
1/2"	3/8"	CHISEL	10 M	30312
1/2"	3/8"	CHISEL	20 M	47376
9/16"	3/8"	CHISEL	10 M	30314
5/8"	3/8"	CHISEL	10 M	30316
5/8"	3/8"	CHISEL	12 M	47377
5/8"	3/8"	CHISEL	12 M	47374



Fine Wire Staples

20 - 22 Gauge

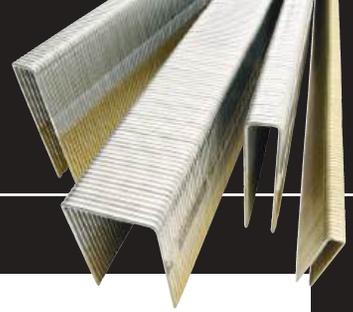

D Series

22 Gauge - 3/16" Crown
5/8" Leg

Length	Crown	POINT	QTY	Part No.
5/8"	3/16"	CHISEL	10 M	30015



F Series

20 Gauge - 1/2" Crown
1/4" - 1/2" Leg

Length	Crown	POINT	QTY	Part No.
1/4"	1/2"	CHISEL	5 M	30405
3/8"	1/2"	CHISEL	5 M	30409
1/2"	1/2"	CHISEL	5 M	30412



G Series

20 Gauge - 3/8" Crown
1/2" Leg

Length	Crown	POINT	QTY	Part No.
1/2"	3/8"	CHISEL	5 M	30065



5400 Series

20 Gauge - 3/16" Crown
1/2" Leg

Length	Crown	POINT	QTY	Part No.
3/8"	3/16"	CHISEL	5 M	30609
9/16"	3/16"	DIVERGENT	5 M	30614

These Interchange PRO staples are designed to fit most brands of tools.

Interchange PRO Fine Wire Staples are used for screening, light trim, mouldings, picture frames, cabinet backing, weather stripping, insulation, roofing felt, upholstery, building paper and carpet and pad.

ELECTRO GALVANIZED

Limited Corrosion Protection.


Ideal for both indoor & light outdoor use.
Complies with ASTM F1667 & A641 Standards.

STAINLESS STEEL

High Corrosion Protection - ACQ Approved.
Ideal for outdoor & high moisture environments.
Ideal for use in Cedar, Redwood and Treated Lumber.

Medium Wire Staples

18 - 19 Gauge

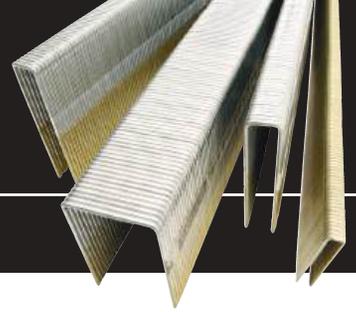

J Series

18 Gauge - 7/16" Crown
3/8" - 5/8" Leg

ELECTRO GALVANIZED				
Length	Crown	POINT	QTY	Part No.
5/8"	7/16"	CHISEL	5 M	30075



K Series

19 Gauge - 1/4" Crown
3/4" Leg

ELECTRO GALVANIZED				
Length	Crown	POINT	QTY	Part No.
5/8"	1/4"	CHISEL	5 M	30040



L Series

18 Gauge - 1/4" Crown
3/8" - 1-1/2" Leg


ELECTRO GALVANIZED				
Length	Crown	POINT	QTY	Part No.
3/8"	1/4"	CHISEL	5 M	32302
1/2"	1/4"	CHISEL	5 M	32305
1/2"	1/4"	CHISEL	5 M	32261 *
5/8"	1/4"	CHISEL	5 M	32263 *
5/8"	1/4"	CHISEL	5 M	32310
3/4"	1/4"	CHISEL	5 M	32264 *
3/4"	1/4"	CHISEL	5 M	32320
7/8"	1/4"	CHISEL	5 M	32265 *
7/8"	1/4"	CHISEL	5 M	32330
1"	1/4"	CHISEL	5 M	32340
1"	1/4"	CHISEL	5 M	32266 *
1-1/8"	1/4"	CHISEL	5 M	32267 *
1-1/8"	1/4"	CHISEL	5 M	32345
1-1/4"	1/4"	CHISEL	5 M	32268 *
1-1/4"	1/4"	CHISEL	5 M	32350
1-3/8"	1/4"	CHISEL	5 M	30207
1-1/2"	1/4"	CHISEL	5 M	32270 *
1-1/2"	1/4"	CHISEL	5 M	32360



* Industrial Fasteners feature a higher tensile strength

Medium Wire Staples

18 - 19 Gauge

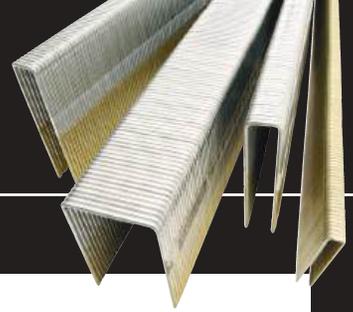

M Series

18 Gauge - 3/8" Crown
3/8" - 1-1/2" Leg



ELECTRO GALVANIZED				
Length	Crown	POINT	QTY	Part No.
3/8"	3/8"	CHISEL	5 M	32416
1/2"	3/8"	CHISEL	5 M	32405
5/8"	3/8"	CHISEL	5 M	32411
3/4"	3/8"	CHISEL	5 M	32415
7/8"	3/8"	CHISEL	5 M	32417
1"	3/8"	CHISEL	5 M	32420
1-1/8"	3/8"	CHISEL	5 M	32422
1-1/4"	3/8"	CHISEL	5 M	32425
1-1/2"	3/8"	CHISEL	5 M	32430



GSN Series

18 Gauge - 3/16" Crown
5/8" - 1-1/2" Leg

ELECTRO GALVANIZED				
Length	Crown	POINT	QTY	Part No.
5/8"	3/16"	CHISEL	5 M	32110
3/4"	3/16"	CHISEL	5 M	32120
7/8"	3/16"	CHISEL	5 M	32130
1"	3/16"	CHISEL	5 M	32140
1-1/8"	3/16"	CHISEL	5 M	32145
1-1/4"	3/16"	CHISEL	5 M	32150
1-1/2"	3/16"	CHISEL	5 M	32160



SX Series

18 Gauge - 7/32" Crown
5/8" - 1-3/8" Leg

ELECTRO GALVANIZED				
Length	Crown	POINT	QTY	Part No.
5/8"	7/32"	CHISEL	5 M	30210
3/4"	7/32"	CHISEL	5 M	30220
7/8"	7/32"	CHISEL	5 M	30230
1"	7/32"	CHISEL	5 M	30240
1-1/8"	7/32"	CHISEL	3 M	30245
1-3/16"	7/32"	CHISEL	3 M	30248
1-1/4"	7/32"	CHISEL	3 M	30249
1-3/8"	7/32"	CHISEL	3 M	30251


ELECTRO GALVANIZED
Limited Corrosion Protection.
Ideal for both indoor & light outdoor use.
Complies with ASTM F1667 & A641 Standards.

STAINLESS STEEL
High Corrosion Protection - ACQ Approved.
Ideal for outdoor & high moisture environments.
Ideal for use in Cedar, Redwood and Treated Lumber.

These Interchange PRO staples are designed to fit most brands of tools. Interchange PRO Medium Wire Staples are used for cabinet building, underlayment, mouldings, aluminum and steel siding, soffit and fascia.

Heavy Wire Staples

14 - 16 Gauge



16
GA
MEDIUM CROWN
STAPLE

N Series

16 Gauge - 7/16" Crown
3/8" - 2" Leg

STAINLESS STEEL - 304

Length	Crown	POINT	QTY	Part No.
1-1/4"	7/16"	CHISEL	10 M	34252
1-1/2"	7/16"	CHISEL	10 M	34262
1-3/4"	7/16"	CHISEL	10 M	34272
2"	7/16"	CHISEL	10 M	34282



SN5016 PRO
*Medium
Crown Stapler*
Part No. 65771
See Page 11

ELECTRO GALVANIZED

Length	Crown	POINT	QTY	Part No.
1"	7/16"	CHISEL	10 M	34241
1"	7/16"	DIVER- GENT POINT	10 M	34343
1/2"	7/16"	CHISEL	10 M	34220
1-1/2"	7/16"	CHISEL	10 M	34261
1-1/4"	7/16"	CHISEL	10 M	34251
1-1/8"	7/16"	CHISEL	10 M	34246
1-3/4"	7/16"	CHISEL	10 M	34271
1-3/8"	7/16"	CHISEL	10 M	34256
2"	7/16"	CHISEL	10 M	34281
3/4"	7/16"	CHISEL	10 M	34228
3/4"	7/16"	CHISEL	10 M	34229
5/8"	7/16"	CHISEL	10 M	34227
7/8"	7/16"	CHISEL	10 M	34232

16
GA
WIDE CROWN
STAPLE

P Series

16 Gauge - 1" Crown
3/8" - 2" Leg



SP4016 PRO
*Wide
Crown Stapler*
Part No. 65772
See Page 11

ELECTRO GALVANIZED

Length	Crown	POINT	QTY	Part No.
5/8"	1"	CHISEL	10 M	36211
3/4"	1"	CHISEL	10 M	36221
7/8"	1"	CHISEL	10 M	36231
1"	1"	CHISEL	10 M	36241
1-1/4"	1"	CHISEL	10 M	36251
1-1/4"	1"	CHISEL	10 M	36252
1-1/2"	1"	CHISEL	10 M	36262
1-1/2"	1"	CHISEL	10 M	36263 *
1-3/4"	1"	CHISEL	5 M	36270
2"	1"	CHISEL	5 M	36280

* Industrial Fasteners feature a higher tensile strength

15
GA
MEDIUM CROWN
Q-WIRE STAPLE

Q Series


15 Gauge - 7/16" Crown
1-1/4" - 2-1/2" Leg

ELECTRO GALVANIZED

Length	Crown	POINT	QTY	Part No.
1-1/4"	7/16"	CHISEL	5 M	38255
1-1/2"	7/16"	CHISEL	5 M	38260
1-3/4"	7/16"	CHISEL	5 M	38270
2"	7/16"	CHISEL	5 M	38280
2-1/2"	7/16"	CHISEL	5 M	38290

Heavy Wire Staples

14 - 16 Gauge

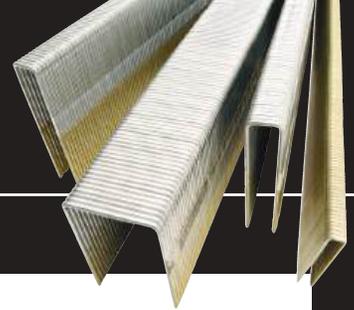

BCS Wide Crown

16 Gauge - 1" Crown
3/4" - 2" Leg

ELECTRO GALVANIZED				
Length	Crown	POINT	QTY	Part No.
5/8"	1"	CHISEL	10 M	36016
3/4"	1"	CHISEL	10 M	36019
7/8"	1"	CHISEL	10 M	36021
1"	1"	CHISEL	10 M	36025
1-1/4"	1"	CHISEL	10 M	36033
1-1/2"	1"	CHISEL	10 M	36039
1-3/4"	1"	CHISEL	10 M	36045
2"	1"	CHISEL	5 M	36050



BCS Med Crown

16 Gauge - 1/2" Crown
1" - 2" Leg

ELECTRO GALVANIZED				
Length	Crown	POINT	QTY	Part No.
1"	1/2"	CHISEL	10 M	34441
1-1/4"	1/2"	CHISEL	10 M	34451
1-1/2"	1/2"	CHISEL	10 M	34461
1-3/4"	1/2"	CHISEL	10 M	34471
2"	1/2"	CHISEL	10 M	34481



BCS-FS Series

15 Gauge - 1/2" Crown
1-1/2" - 2" Leg

ELECTRO GALVANIZED				
Length	Crown	POINT	QTY	Part No.
1-1/2"	1/2"	CHISEL	9.66 M	38165
2"	1/2"	CHISEL	7.72 M	38185

ELECTRO GALVANIZED

Limited Corrosion Protection.
Ideal for both indoor & light outdoor use.
Complies with ASTM F1667 & A641 Standards.

STAINLESS STEEL

High Corrosion Protection - ACQ Approved.
Ideal for outdoor & high moisture environments.
Ideal for use in Cedar, Redwood and Treated Lumber.

These Interchange PRO staples are designed to fit most brands of tools.
Interchange PRO Heavy Wire Staples are used for cedar and shake shingles; subflooring; wall sheathing; roof decking; aluminum, steel and composition siding; lathing; bridging; component assembly and fencing.



LCN Series


16 Gauge
2" Leg



BRIGHT				
Length	Crown	POINT	Qty	Part No.
2"	—	—	5 M	25300

Heavy Wire Staples

14 - 16 Gauge



16^{GA}
MEDIUM CROWN
STAPLE

GS16 Series

16 Gauge - 1/2" Crown
3/4" - 2" Leg

ELECTRO GALVANIZED				
Length	Crown	POINT	QTY	Part No.
3/4"	1/2"	CHISEL	10 M	34135
1"	1/2"	CHISEL	10 M	34141
1-1/4"	1/2"	CHISEL	10 M	34151
1-1/2"	1/2"	CHISEL	10 M	34161
1-3/4"	1/2"	CHISEL	10 M	34171
2"	1/2"	CHISEL	10 M	34181

STAINLESS STEEL - 304				
Length	Crown	POINT	QTY	Part No.
1-1/4"	1/2"	CHISEL	10 M	34152
1-1/2"	1/2"	CHISEL	10 M	34162
1-3/4"	1/2"	CHISEL	10 M	34172
2"	1/2"	CHISEL	1 M	34182

14^{GA}
WIDE CROWN
STAPLE

GSW 14 Ga

14 Gauge - 15/16" Crown
7/8" Leg

ELECTRO GALVANIZED				
Length	Crown	POINT	QTY	Part No.
7/8"	15/16"	CHISEL	10 M	25167
7/8"	15/16"	CHISEL	5 M	36105

16^{GA}
WIDE CROWN
STAPLE

GSW 16 Ga

16 Gauge - 15/16" Crown
5/8" - 2" Leg

ELECTRO GALVANIZED				
Length	Crown	POINT	QTY	Part No.
5/8"	15/16"	CHISEL	10 M	36100
7/8"	15/16"	CHISEL	10 M	36121
1"	15/16"	CHISEL	10 M	36125
1-1/4"	15/16"	CHISEL	10 M	36133
1-1/2"	15/16"	CHISEL	10 M	36137
1-3/4"	15/16"	CHISEL	5 M	36144
2"	15/16"	CHISEL	10 M	36180
2"	15/16"	CHISEL	5 M	36150

16^{GA}
MEDIUM CROWN
STAPLE DUO-FAST

7600 Series

16 Gauge - 7/16" Crown
1" - 2" Leg


ELECTRO GALVANIZED				
Length	Crown	POINT	QTY	Part No.
1"	7/16"	CHISEL	10 M	34341
1-1/4"	7/16"	CHISEL	10 M	34351
1-1/2"	7/16"	CHISEL	10 M	34361
1-3/4"	7/16"	CHISEL	10 M	34371
2"	7/16"	CHISEL	10 M	34381

Collated Staples

Fasteners

Tacker Staples

20 - 23 Gauge

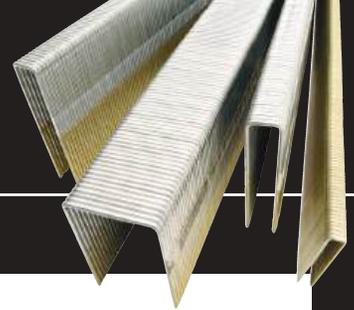

5000 Series

20 Gauge - 1/2" Crown
1/4" - 9/16" Leg

ELECTRO GALVANIZED				
Length	Crown	POINT	QTY	Part No.
1/4"	1/2"	CHISEL	5 M	30810
5/16"	1/2"	CHISEL	5 M	30820
5/16"	1/2"	CHISEL	5 M	30821
3/8"	1/2"	CHISEL	5 M	30830
1/2"	1/2"	CHISEL	5 M	30835
9/16"	1/2"	CHISEL	5 M	30840



A11 Series

20 Gauge - 3/8" Crown
1/4" - 9/16" Leg

ELECTRO GALVANIZED				
Length	Crown	POINT	QTY	Part No.
1/4"	3/8"	CHISEL	5 M	30516
5/16"	3/8"	CHISEL	5 M	30517
3/8"	3/8"	CHISEL	5 M	30519
1/2"	3/8"	CHISEL	5 M	30521
9/16"	3/8"	CHISEL	5 M	30523



A19 Series

23 Gauge - 3/8" Crown
1/4" Leg

ELECTRO GALVANIZED				
Length	Crown	POINT	QTY	Part No.
1/4"	3/8"	CHISEL	5 M	30506

STAINLESS STEEL - 304				
Length	Crown	POINT	QTY	Part No.
1/4"	3/8"	CHISEL	5 M	30019



SHCR Series

20 Gauge - 3/8" Crown
3/8" Leg

ELECTRO GALVANIZED				
Length	Crown	POINT	QTY	Part No.
1/4"	3/8"	CHISEL	5 M	30719
3/8"	3/8"	CHISEL	5 M	30710
3/8"	3/8"	CHISEL	5 M	30720
9/16"	3/8"	CHISEL	5 M	30730



STCR Series

20-23 Gauge - 3/8" Crown
1/4" - 9/16" Leg

ELECTRO GALVANIZED				
Length	Crown	POINT	QTY	Part No.
5/16"	7/16"	CHISEL	5 M	30716

These Interchange PRO staples are designed to fit most brands of tools.



ICB-A11-Tacker
Hammer Tacker Stapler
Part No. 64210

Uses
A11 Series
Staples

ELECTRO GALVANIZED	
Limited Corrosion Protection. Ideal for both indoor & light outdoor use. Complies with ASTM F1667 & A641 Standards.	
STAINLESS STEEL	
High Corrosion Protection - ACQ Approved. Ideal for outdoor & high moisture environments. Ideal for use in Cedar, Redwood and Treated Lumber.	

Fasteners
Collated Staples

1 lb & 5 lb Bulk Nails

Bright / Vinyl Ideal for indoor projects. Excellent holding power & a clean finish for framing, carpentry and woodworking.

Electro Galvanized Ideal for both indoor & light outdoor use. Ensuring strength & protection with its added corrosion resistance coating.

Hot Galvanized Ideal for outdoor & high-moisture environments. Durable & rust-resistant. ACQ Approved

Interchange Pro nails are made from premium-grade steel and engineered for superior performance and durability. Ideal for framing, finishing and specialty applications.

Fasteners Bulk Nails

 <p>FINISH NAILS</p> <p>Available in 1 lb</p>	<p>Bright </p> <p>Ideal for attaching trim and finishing work with a concealed head. Not suggested for treated lumber or exterior projects.</p>	<p>Hot Galvanized  ACQ APPROVED</p> <p>Ideal for attaching trim and finishing work with a concealed head. High corrosion protection. Recommended for treated lumber.</p>
 <p>CASING NAILS</p> <p>Available in 1 lb</p>	<p>Hot Galvanized  ACQ APPROVED</p> <p>Ideal for attaching case molding for windows or doors. High corrosion protection. Recommended for treat lumber.</p>	
 <p>COMMON NAILS</p> <p>Available in 1 lb 5 lb</p>	<p>Bright </p> <p>Ideal for framing and general construction. Not suggested for treated lumber or exterior projects.</p>	<p>Hot Galvanized  ACQ APPROVED</p> <p>Ideal for framing and general construction. High corrosion protection. Recommended for treated lumber.</p>
 <p>BOX NAILS</p> <p>Available in 1 lb 5 lb</p>	<p>Bright </p> <p>Ideal for light duty construction such as boxes and crates. Not suggested for treated lumber or exterior projects.</p>	<p>Hot Galvanized  ACQ APPROVED</p> <p>Ideal for light duty construction such as boxes and crates. High corrosion protection. Recommended for treated lumber.</p>
 <p>SINKER NAILS</p> <p>Available in 1 lb 5 lb</p>	<p>Bright </p> <p>Ideal for framing, carpentry and general construction. Not suggested for treated lumber or exterior projects.</p>	
 <p>DUPLEX NAILS</p> <p>Available in 1 lb 5 lb</p>	<p>Bright </p> <p>For temporary structures such as scaffolds and framework. Not suggested for treated lumber or exterior projects.</p>	
 <p>JOIST HANGER NAILS</p> <p>Available in 1 lb 5 lb</p>	<p>Bright </p> <p>Ideal for attaching joist hangers to wood framework. Not suggested for treated lumber or exterior projects.</p>	<p>Hot Galvanized  ACQ APPROVED</p> <p>Ideal for attaching trim and finishing work with a concealed head. High corrosion protection. Recommended for treated lumber.</p>

Get our flyer digitally!

Scan the QR code.



SOLD IN RECLOSABLE COMPACT BOXES

1 lb & 5 lb Bulk Nails

Bright / Vinyl Ideal for indoor projects. Excellent holding power & a clean finish for framing, carpentry and woodworking.

Electro Galvanized Ideal for both indoor & light outdoor use. Ensuring strength & protection with its added corrosion resistance coating.

Hot Galvanized Ideal for outdoor & high-moisture environments. Durable & rust-resistant. ACQ Approved

<p>FLUTED MASONRY NAILS</p> <p>Available in 1 lb</p>	<p>Bright </p> <p>Ideal for attaching wood to uncured concrete or masonry. Not suggested for treated lumber or exterior projects.</p>
<p>CUT MASONRY NAILS</p> <p>Available in 1 lb 5 lb</p>	<p>Bright  Hot Galvanized  ACQ APPROVED</p> <p>Ideal for attaching wood to brick and concrete. Not suggested for treated lumber or exterior projects.</p> <p>Ideal for attaching wood to brick and concrete. High corrosion protection. Recommended for treated lumber.</p>
<p>ROOFING NAILS</p> <p>Available in 1 lb 5 lb</p>	<p>Electro Galvanized </p> <p>For asphalt roofing installation. Limited corrosion protection.</p>
<p>ROOFING NAILS W/ NEOPRENE WSHR</p> <p>Available in 1 lb 5 lb</p>	<p>Electro Galvanized </p> <p>Ideal for steel and fiberglass roofing. Limited corrosion protection.</p>
<p>PLASTIC CAP</p> <p>Available in 1 lb</p>	<p>Electro Galvanized </p> <p>For asphalt roofing installation. Limited corrosion protection.</p>
<p>UNDERLAYMENT NAILS</p> <p>Available in 1 lb</p>	<p>Bright </p> <p>Ideal for fastening plywood or composition underlayment over existing subfloor. Not suggested for treated lumber or exterior projects.</p>
<p>PATIO/DECK NAILS</p> <p>Available in 1 lb</p>	<p>Hot Galvanized  ACQ APPROVED</p> <p>Ideal for patio and deck construction. High corrosion protection. Recommended for treated lumber.</p>
<p>POLE BARN NAILS</p> <p>Available in 1 lb 5 lb</p>	<p>Bright </p> <p>Ideal for load-bearing, wood framed structures where high holding strength is necessary. Not suggested fro treated lumber or exterior projects.</p>

1 lb & 5 lb Bulk Nails

Bright / Vinyl Ideal for indoor projects. Excellent holding power & a clean finish for framing, carpentry and woodworking.

Electro Galvanized Ideal for both indoor & light outdoor use. Ensuring strength & protection with its added corrosion resistance coating.

Hot Galvanized Ideal for outdoor & high-moisture environments. Durable & rust-resistant. ACQ Approved

Interchange Pro nails are made from premium-grade steel and engineered for superior performance and durability. Ideal for framing, finishing and specialty applications.

Fasteners Bulk Nails

BOX NAILS

Length	Penny	Shank	Finish	Manf No - 1lb	Manf No - 5lb	Description
2"	6D	SMOOTH	Bright	N/A	45121	Box 6D 2In Smooth Bright
2-1/2"	8D			45124	N/A	Box 8D 2.5In Smooth Bright
3"	10D			45126	N/A	Box 10D 3In Smooth Bright
3-1/4"	12D			45127	N/A	Box 12D 3.25In Smooth Bright
3-1/2"	16D			45129	N/A	Box 16D 3.5In Smooth Bright
2"	6D		Hot Galvanized	45123	45381	Box 6D 2In Smooth Hot Galvanized
2-1/2"	8D			45125	45382	Box 8D 2.5In Smooth Hot Galvanized
3-1/4"	12D			45128	N/A	Box 12D 3.25In Smooth Hot Galvanized
3-1/2"	16D			45130	45378	Box 16D 3.5In Smooth Hot Galvanized

CASING NAILS

Length	Penny	Shank	Finish	Manf No - 1lb	Manf No - 5lb	Description
2"	6D	SMOOTH	Hot Galvanized	45141	N/A	Casing 6D 2In Smooth Hot Galvanized
2-1/2"	8D			45142		Casing 8D 2.5In Smooth Hot Galvanized
3-1/2"	16D			45144		Casing 16D 3.5In Smooth Hot Galvanized

COMMON NAILS

Length	Penny	Shank	Finish	Manf No - 1lb	Manf No - 5lb	Description
2"	6D	SMOOTH	Bright	45095	45096	Common 6D 2In Smooth Bright
2-1/2"	8D			45102	45103	Common 8D 2.5In Smooth Bright
3"	10D			45106	45107	Common 10D 3In Smooth Bright
3-1/4"	12D			45111	45112	Common 12D 3.25In Smooth Bright
3-1/2"	16D			45115	45116	Common 16D 3.5In Smooth Bright
2"	6D		Hot Galvanized	45097	45099	Common 6D 2In Smooth Hot Galvanized
2-1/2"	8D			45104	45105	Common 8D 2.5In Smooth Hot Galvanized
3"	10D			45108	45109	Common 10D 3In Smooth Hot Galvanized
3-1/4"	12D			45113	45114	Common 12D 3.25In Smooth Hot Galvanized
3-1/2"	16D			45117	45119	Common 16D 3.5In Smooth Hot Galvanized

CUT MASONRY NAILS

Length	Penny	Shank	Coating	Manf No - 1lb	Manf No - 5lb	Description
1-1/2"	4D	N/A	Bright	45204	N/A	Cut Masonry 4D 1.5in Bright
2-1/2"	8D			45205	45384	Cut Masonry 8D 2.5in Bright
2-1/2"	8D		Hot Galvanized	45237	45239	Cut Masonry 8D 2.5in Hot Galvanized

DRYWALL NAILS

Length	Gauge	Shank	Coating	Manf No - 1lb	Manf No - 5lb	Description
1-3/8"	13ga	SMOOTH	Phosphate	45410	45411	Drywall 13ga 1.375in Smooth Phosphate
1-5/8"	13ga			45416	45413	Drywall 13ga 1.625in Smooth Phosphate

DUPLEX NAILS

Length	Penny	Shank	Coating	Manf No - 1lb	Manf No - 5lb	Description
2-1/4"	8D	SMOOTH	Bright	45145	45146	Duplex 8D 2.25in Smooth Bright
3"	16D			45149	45152	Duplex 16D 3in Smooth Bright

1 lb & 5 lb Bulk Nails

Bright / Vinyl Ideal for indoor projects. Excellent holding power & a clean finish for framing, carpentry and woodworking.

Electro Galvanized Ideal for both indoor & light outdoor use. Ensuring strength & protection with its added corrosion resistance coating.

Hot Galvanized Ideal for outdoor & high-moisture environments. Durable & rust-resistant. ACQ Approved

Length	Penny/ Diameter	Shank	Coating	Manf No - 1lb	Manf No - 5lb	Description
--------	--------------------	-------	---------	---------------	---------------	-------------

FENCE STAPLES

Length	Gauge	Shank	Coating	Manf No - 1lb	Manf No - 5lb	Description
1-1/4"	9ga	--	Hot Galvanized	45206	N/A	Fence Staples 9ga 1.25in Hot Galvanized
1-1/2"	9ga			45207		Fence Staples 9ga 1.5in Hot Galvanized

FINISH NAILS

Length	Penny	Shank	Coating	Manf No - 1lb	Manf No - 5lb	Description
1-1/4"	3D	SMOOTH	Bright	45159	N/A	Finish 3D 1.25in Smooth Bright
1-1/2"	4D			45162		Finish 4D 1.5in Smooth Bright
2"	6D			45164		Finish 6D 2in Smooth Bright
2-1/2"	8D			45166		Finish 6D 2in Smooth Bright
3"	10D			45169		Finish 10D 3in Smooth Bright
3-1/2"	16D		45172	Finish 16D 3.5in Smooth Bright		
1-1/4"	3D		Hot Galvanized	45161		Finish 3D 1.25in Smooth Hot Galvanized
1-1/2"	4D			45163		Finish 4D 1.5in Smooth Hot Galvanized
2"	6D			45165		Finish 6D 2in Smooth Hot Galvanized
2-1/2"	8D			45167		Finish 8D 2.5in Smooth Hot Galvanized
3"	10D	45171		Finish 10D 3in Smooth Hot Galvanized		
3-1/2"	16D	45173	Finish 16D 3.5in Smooth Hot Galvanized			

FLUTED MASONRY NAILS

Length	Diameter	Shank	Coating	Manf No - 1lb	Manf No - 5lb	Description
3/4"	N/A	FLUTED	Bright	45193	N/A	Fluted Masonry Nails 1in Fluted Bright
1"				45195		Fluted Masonry Nails 1.5in Fluted Bright
1-1/4"				45196		Fluted Masonry Nails 1.25in Fluted Bright
1-1/2"				45197		Fluted Masonry Nails 2in Fluted Bright
2"				45198		Fluted Masonry Nails 2.5in Fluted Bright
2-1/2"				45199		Fluted Masonry Nails 3in Fluted Bright
3"				45203		Fluted Masonry Nails 0.75in Fluted Bright

JOIST HANGER NAILS

Length	Gauge	Shank	Coating	Manf No - 1lb	Manf No - 5lb	Description
1-1/2"	9ga	SMOOTH	Bright	45153	45154	Joist Hanger 9ga 1.5in Smooth Bright
2-1/2"	8ga			N/A	45383	Joist Hanger 8ga 2.5in Smooth Bright
1-1/2"	9ga		Hot Galvanized	45155	45156	Joist Hanger 9ga 1.5in Smooth Hot Galvanized
2-1/2"	8ga			45157	45158	Joist Hanger 8ga 2.5in Smooth Hot Galvanized

PATIO AND DECK NAILS

Length	Penny	Shank	Coating	Manf No - 1lb	Manf No - 5lb	Description
2"	6D	RING	Hot Galvanized	45213	N/A	Patio/Deck 6D 2in Ring Hot Galvanized
2"	6D	SCREW		45209		Patio/Deck 6D 2in Screw Hot Galvanized
2-1/2"	8D	RING		45215		Patio/Deck 8D 2.5in Ring Hot Galvanized
2-1/2"	8D	SCREW		45214		Patio/Deck 8D 2.5in Screw Hot Galvanized
3-1/4"	12D	RING		45216		Patio/Deck 16D 3.5in Ring Hot Galvanized
3-1/2"	16D	RING		45219		Patio/Deck 16D 3.5in Screw Hot Galvanized
3-1/2"	16D	SCREW		45217		Patio/Deck 12D 3.25in Ring Hot Galvanized

Fasteners

Bulk Nails

1 lb & 5 lb Bulk Nails

Bright / Vinyl Ideal for indoor projects. Excellent holding power & a clean finish for framing, carpentry and woodworking.

Electro Galvanized Ideal for both indoor & light outdoor use. Ensuring strength & protection with its added corrosion resistance coating.

Hot Galvanized Ideal for outdoor & high-moisture environments. Durable & rust-resistant. ACQ Approved

Interchange Pro nails are made from premium-grade steel and engineered for superior performance and durability. Ideal for framing, finishing and specialty applications.

Length	Penny/ Diameter	Shank	Coating	Manf No - 1lb	Manf No - 5lb	Description
PLASTIC CAP NAILS						
Length	Gauge	Shank	Coating	Manf No - 1lb	Manf No - 5lb	Description
1"	12ga	RING	Electro Galvanized	45189	N/A	Plastic Cap 12ga 1in Ring Electro Galvanized
1-1/2"	12ga			45191		Plastic Cap 12ga 1.5in Ring Electro Galvanized
2"	12ga			45192		Plastic Cap 12ga 2in Ring Electro Galvanized
POLE BARN NAILS						
Length	Penny	Shank	Coating	Manf No - 1lb	Manf No - 5lb	Description
2-1/2"	8D	RING	Bright	45233	N/A	Pole Barn 8D 2.5in Ring Bright
3"	10D			N/A	45235	Pole Barn 10D 3in Ring Bright
3-1/2"	16D			N/A	45236	Pole Barn 16D 3.5in Ring Bright
POULTRY NET STAPLES						
Length	Diameter	Shank	Coating	Manf No - 1lb	Manf No - 5lb	Description
3/4"	N/A	N/A	Hot Galvanized	45221	N/A	Poultry Net Staples 0.75in Hot Galvanized
ROOFING NAILS						
Length	Gauge	Shank	Coating	Manf No - 1lb	Manf No - 5lb	Description
3/4"	11ga	SMOOTH	Electro Galvanized	45174	45331	Roofing 11ga 0.75in Smooth Electro Galvanized
7/8"	11ga			45328	45332	Roofing 11ga 0.875in Smooth Electro Galvanized
1"	11ga			45175	45176	Roofing 11ga 1in Smooth Electro Galvanized
1-1/4"	11ga			45177	45179	Roofing 11ga 1.25in Smooth Electro Galvanized
1-1/2"	11ga			45180	45333	Roofing 11ga 1.5in Smooth Electro Galvanized
1-3/4"	11ga			45181	45183	Roofing 11ga 1.75in Smooth Electro Galvanized
1-3/4"	10ga	RING		45240	45241	Roofing 10ga 1.75in Ring Electro Galvanized w/NEOPRENE WASHER
2"	11ga			45184	N/A	Roofing 11ga 2in Ring Electro Galvanized
2"	11ga	SMOOTH		45186	45187	Roofing 11ga 2in Smooth Electro Galvanized
2-1/2"	11ga			45329	45334	Roofing 11ga 2.5in Smooth Electro Galvanized
3"	11ga			45330	45336	Roofing 11ga 3in Smooth Electro Galvanized
SINKER NAILS						
Length	Penny	Shank	Coating	Manf No - 1lb	Manf No - 5lb	Description
1-7/8"	6D	SMOOTH	Vinyl	45131	45132	Sinker 6D 1.875in Smooth Vinyl
2-3/8"	8D			45133	45134	Sinker 8D 2.375in Smooth Vinyl
3-1/8"	12D			45135	45136	Sinker 16D 3.25in Smooth Vinyl
3-1/4"	16D			45137	45138	Sinker 12D 3.125in Smooth Vinyl
3-3/4"	20D			45139	N/A	Sinker 20D 3.75in Smooth Vinyl
UNDERLAYMENT NAILS						
Length	Gauge	Shank	Coating	Manf No - 1lb	Manf No - 5lb	Description
1-1/4"	12.5ga	RING	Bright	45230	N/A	Underlayment 12.5ga 1.5in Ring Bright
1-1/2"	12.5ga			45231		Underlayment 12.5ga 1.25in Ring Bright

Fasteners Bulk Nails

Bulk Nails

Bright / Vinyl Ideal for indoor projects. Excellent holding power & a clean finish for framing, carpentry and woodworking.

Electro Galvanized Ideal for both indoor & light outdoor use. Ensuring strength & protection with its added corrosion resistance coating.

Hot Galvanized Ideal for outdoor & high-moisture environments. Durable & rust-resistant. ACQ Approved



NOTES





50 lb Bulk Nails


Interchange Pro nails are made from premium-grade steel and engineered for superior performance and durability. Ideal for framing, finishing and specialty applications.

Bright / Vinyl Ideal for indoor projects. Excellent holding power & a clean finish for framing, carpentry and woodworking.

Electro Galvanized Ideal for both indoor & light outdoor use. Ensuring strength & protection with its added corrosion resistance coating.

Hot Galvanized Ideal for outdoor & high-moisture environments. Durable & rust-resistant. ACQ Approved

Fasteners Bulk Nails

 <p>COMMON NAILS</p>	<p>Bright</p>  <p>Ideal for framing and general construction. Not suggested for treated lumber or exterior projects.</p>	<p>Hot Galvanized</p>  <p>ACQ APPROVED</p> <p>Ideal for framing and general construction. High corrosion protection. Recommended for treated lumber.</p>
 <p>BOX NAILS</p>	<p>Bright</p>  <p>Ideal for light duty construction such as boxes and crates. Not suggested for treated lumber or exterior projects.</p>	<p>Hot Galvanized</p>  <p>ACQ APPROVED</p> <p>Ideal for exterior light duty construction. High corrosion protection. Recommended for treated lumber.</p>
 <p>DUPLEX NAILS</p>	<p>Bright</p>  <p>For temporary structures such as scaffolds and framework.</p>	
 <p>SINKER NAILS</p>	<p>Vinyl</p>  <p>Ideal for framing, carpentry and general construction. Not suggested for treated lumber or exterior projects.</p>	
 <p>ROOFING NAILS</p>	<p>Electro Galvanized</p>  <p>For asphalt roofing installation. Limited corrosion protection.</p>	<p>Hot Galvanized</p>  <p>ACQ APPROVED</p> <p>For asphalt roofing installation. High corrosion protection. Recommended for treated lumber.</p>
 <p>METAL SQUARE CAP NAILS</p>	<p>Electro Galvanized</p>  <p>Ideal for fastening underlayment substrates and insulation. Limited corrosion protection.</p>	
 <p>CUT MASONRY NAILS</p>	<p>Bright</p>  <p>Ideal for attaching wood to interior brick and concrete. Not suggested for treated lumber or exterior projects.</p>	<p>Hot Galvanized</p>  <p>ACQ APPROVED</p> <p>Ideal for attaching wood to brick and concrete. High corrosion protection. Recommended for treated lumber.</p>
 <p>JOIST HANGER NAILS</p>	<p>Bright Electro Galvanized</p>  <p>Ideal for attaching joist hangers to wood framework. Not suggested for treated lumber or exterior projects.</p>	<p>Hot Galvanized</p>  <p>ACQ APPROVED</p> <p>Ideal for attaching joist hangers to wood framework. High corrosion protection. Recommended for treated lumber.</p>
 <p>PALLET NAILS (Machine Grade)</p>	<p>Bright</p>   <p>Ideal for pallet and crate building. Not suggested for treated lumber or exterior projects.</p>	
 <p>ROOFING TILE NAILS</p>	<p>Electro Galvanized</p>  <p>For clay roofing tile installation. Limited corrosion protection.</p>	

50 lb Bulk Nails

Length	Penny/Diameter	Shank	Coating	Point	Sort Name	Description	
BOX NAILS							
2-1/2"	8D	SMOOTH	Electro Galvanized	N/A	45005	Box 8D 2-1/2in Smooth Electro Galvanized	
3-1/2"	16D		Hot Galvanized		45000	Box 16D 3-1/2in Smooth Electro Galvanized	
2-1/2"	8D		Hot Galvanized		45245	Box 8D 2-1/2in Smooth Hot Galvanized	
3-1/2"	16D		Hot Galvanized		45003	Box 16D 3-1/2in Smooth Hot Galvanized	
COMMON NAILS							
2"	6D	SMOOTH	Bright	N/A	45028	Common 6D 2in Smooth Bright	
2-1/2"	8D				45032	Common 8D 2-1/2in Smooth Bright	
3"	10D				45017	Common 10D 3in Smooth Bright	
3-1/4"	12D				45019	Common 12D 3-1/4in Smooth Bright	
3-1/2"	16D				45021	Common 16D 3-1/2in Smooth Bright	
4"	20D				45023	Common 20D 4in Smooth Bright	
5"	40D		45026		Common 40D 5in Smooth Bright		
6"	60D		45027		Common 60D 6in Smooth Bright		
2"	6D		Hot Galvanized		45031	Common 6D 2in Smooth Hot Galvanized	
3"	10D				45018	Common 10D 3in Smooth Hot Galvanized	
3-1/2"	16D				45022	Common 16D 3-1/2in Smooth Hot Galvanized	
CUT MASONRY NAILS							
2-1/2"	8D	N/A	Bright	N/A	45014	Cut Masonry 8D 2-1/2in Temper Hardened Bright	
3"	10D		Hot Galvanized		45008	Cut Masonry 10D 3in Temper Hardened Bright	
2-1/2"	8D		Hot Galvanized		45016	Cut Masonry 8D 2-1/2in Temper Hardened Hot Galvanized	
3"	10D		Hot Galvanized		45013	Cut Masonry 10D 3in Temper Hardened Hot Galvanized	
DUPLEX NAILS							
1-3/4"	6D	SMOOTH	Bright	N/A	45034	Duplex 6D 1-3/4in Smooth Bright	
2-1/4"	8D				45035	Duplex 8D 2-1/4in Smooth Bright	
3"	16D				45033	Duplex 16D 3in Smooth Bright	
JOIST HANGER NAILS							
1-1/2"	9G	SMOOTH	Bright	N/A	45037	Joist Hanger 1-1/2in 9G Smooth Bright	
1-1/2"	9G		Electro Galvanized		45038	Joist Hanger 1-1/2in 9G Smooth Electro Galvanized	
1-1/2"	9G		Hot Galvanized		45039	Joist Hanger 1-1/2in 9G Smooth Hot Galvanized	
1-1/2"	10G		Bright		45036	Joist Hanger 1-1/2in 10G Smooth Bright	
METAL SQUARE CAP NAILS							
3/4"		RING	Electro Galvanized	N/A	45047	Metal Square Cap 3/4in Ring Electro Galvanized	
7/8"					45052	Metal Square Cap 7/8in Ring Electro Galvanized	
1"					45043	Metal Square Cap 1in Ring Electro Galvanized	
1-1/4"					45041	Metal Square Cap 1-1/4in Ring Electro Galvanized	
1-3/4"					45042	Metal Square Cap 1-3/4in Ring Electro Galvanized	
2"					45045	Metal Square Cap 2in Ring Electro Galvanized	
2-1/2"					45044	Metal Square Cap 2-1/2in Ring Electro Galvanized	
3"					45048	Metal Square Cap 3in Ring Electro Galvanized	
3-1/2"					45046	Metal Square Cap 3-1/2in Ring Electro Galvanized	
4"					45049	Metal Square Cap 4in Ring Electro Galvanized	
5"					45051	Metal Square Cap 5in Ring Electro Galvanized	
PALLET NAILS							
1-3/4"	.113	SCREW	Bright	No Point	45053	Pallet 1-3/4in x .113 Screw Bright No Point	
1-3/4"				Blunt Diamond Point	45242	Pallet 1-3/4in x .113 Sc Bright Blunt Diamond	
1-5/8"				No Point	45054	Pallet 1-5/8in x .113 Screw Bright No Point	
2"				Blunt Diamond Point	45066	Pallet 2in x .113 Screw Bright Diamond Point	
2"				No Point	45067	Pallet 2in x .113 Screw Bright No Point	
2-1/4"				Blunt Diamond Point	45055	Pallet 2-1/4in x .113 Screw Bright Diamond Point	
2-1/4"		.120		RING	No Point	45057	Pallet 2-1/4in x .113 Screw Bright No Point
2"					No Point	45069	Pallet 2in x .120 Ring Bright No Point
2-1/4"					No Point	45059	Pallet 2-1/4in x .120 Ring Bright No Point
2"				SCREW	Diamond Point	45071	Pallet 2in x .120 Screw Bright Diamond Point
2"					No Point	45072	Pallet 2in x .120 Screw Bright No Point
2-1/4"					No Point	45060	Pallet 2-1/4in x .120 Screw Bright No Point
3"		No Point	45073	Pallet 3in x .120 Screw Bright No Point			
ROOFING NAILS							
3/4"	.120	SMOOTH	Electro Galvanized	N/A	45243	Roofing 3/4in Smooth Electro Galvanized	
7/8"					45244	Roofing 7/8in Smooth Electro Galvanized	
1"					45077	Roofing 1in Smooth Electro Galvanized	
1-1/4"					45075	Roofing 1-1/4in Smooth Electro Galvanized	
1-1/2"					45074	Roofing 1-1/2in Smooth Electro Galvanized	
1-3/4"					45076	Roofing 1-3/4in Smooth Electro Galvanized	
2"			45082		Roofing 2in Smooth Electro Galvanized		
2-1/2"			45078		Roofing 2-1/2in Smooth Electro Galvanized		
3"			45084		Roofing 3in Smooth Electro Galvanized		
2"			45083		Roofing 2in Smooth Hot Galvanized		
2-1/2"			45081		Roofing 2-1/2in Smooth Hot Galvanized		
3"			45085		Roofing 3in Smooth Hot Galvanized		
ROOFING TILE NAILS							
4"	.120	SMOOTH	Electro Galvanized	N/A	45086	Roofing Tile 4in Smooth Electro Galvanized	
6"					45087	Roofing Tile 6in Smooth Electro Galvanized	
SINKER NAILS							
1-7/8"	6D	SMOOTH	Vinyl Coated	N/A	45092	Sinker 6D 1-7/8in Smooth Vinyl	
2-3/8"	8D				45093	Sinker 8D 2-3/8in Smooth Vinyl	
3-1/8"	12D				45089	Sinker 12D 3-1/8in Smooth Vinyl	
3-1/4"	16D				45090	Sinker 16D 3-1/4in Smooth Vinyl	
TURF SPIKE NAILS							
5"	.192	SMOOTH	Bright	N/A	45246	Turf Spike 5in x .192 Smooth Bright	
6"					45247	Turf Spike 6in x .192 Smooth Bright	

Fasteners

Bulk Nails

1M Collated Nails


Bright / Vinyl Ideal for indoor projects. Excellent holding power & a clean finish for framing, carpentry and woodworking.

Electro Galvanized Ideal for both indoor & light outdoor use. Ensuring strength & protection with its added corrosion resistance coating.

Hot Galvanized Ideal for outdoor & high-moisture environments. Durable & rust-resistant. ACQ Approved

Engineered for efficiency, our collated nails are perfect for high-volume fastening with nail guns. Available in a variety of lengths, angles, and finishes to suit framing, siding, roofing, and finish work. Designed for smooth feeding, strong holds, and reduced jamming.

Fasteners Collated Nails
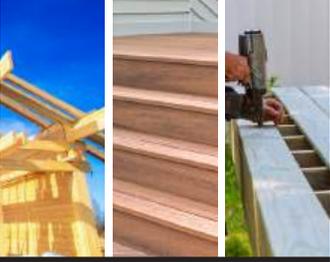
<p>0° PLASTIC COLLATED ROUND HEAD</p>	<p>Electro Galvanized</p> <p>0° COIL, GEORGIA NAIL</p> <p>Smooth & Ring Shank Round Head</p> <p>Siding, Fencing, Sheating, Fiber Cement Board, Soffit</p>		
<p>21° PLASTIC COLLATED ROUND HEAD</p>	<p>Bright Hot Galvanized</p> <p>21° ROUND HEAD NAIL</p> <p>Smooth, Ring & Screw Shank Round Head</p> <p>Wood-to-Wood Construction, Framing, Decking, Fence Building</p>		
<p>15° WIRE COLLATED ROUND HEAD</p>	<p>Electro Galvanized Hot Galvanized</p> <p>15° COIL NAIL</p> <p>Smooth Shank Round Head</p> <p>Siding, Fencing, Sheating, Fiber Cement Board, Soffit</p>		
<p>30°-34° PAPER COLLATED CLIPPED HEAD</p>	<p>Bright Hot Galvanized</p> <p>30°-34° PAPER TAPE</p> <p>Smooth & Ring Shank Clipped Head</p> <p>Wood-to-Wood Construction, Framing, Decking, Fence Building</p>		
<p>34° PAPER COLLATED ROUND HEAD JOIST NAILS</p>	<p>Bright Hot Galvanized</p> <p>MC METAL CONNECTOR NAIL</p> <p>Smooth Shank Round Head</p> <p>Joist Hanger and Metal Connector Installation</p>		

Get our flyer digitally!

Scan the QR code.



NOW AVAILABLE IN DURABLE TUBS

1M Collated Nails

Bright / Vinyl Ideal for indoor projects. Excellent holding power & a clean finish for framing, carpentry and woodworking.

Electro Galvanized Ideal for both indoor & light outdoor use. Ensuring strength & protection with its added corrosion resistance coating.

Hot Galvanized Ideal for outdoor & high-moisture environments. Durable & rust-resistant. ACQ Approved

Length	Diameter	Shank	Coating	Sort Name	Tub Qty	Pallet Qty	Description
0° DPC Plastic Collated Round Head Siding Nails							
1-7/8"	.092	Smooth Ring	Electro Galvanized	45376	1,000	105	1-7/8in x .092 Smooth Shank Electro Galvanized 0° Plastic Fencing Collated Nails
				45377			1-7/8in x .092 Ring Shank Electro Galvanized 0° Plastic Fencing Collated Nails
15° HWCF Paper Collated Round Head Siding Nails							
1-3/4"	.092	Ring	Electro Galvanized	45372	1,200	105	1-3/4in x .092 Ring Shank Electro Galvanized 15° Wire 8.0 Fencing Collated Nails
2"			Hot Galvanized	45323			2in x .092 Ring Shank Hot Galvanized 15° Wire 8.0 Fencing Collated Nails
2-3/16"			Electro Galvanized	45324			2-3/16in x .092 Ring Shank Hot Galvanized 15° Wire 8.0 Fencing Collated Nails
2-1/4"			Electro Galvanized	45374			2-1/4in x .092 Ring Shank Electro Galvanized 15° Wire 8.0 Fencing Collated Nails
21° DPS Plastic Collated Round Framing Head Nails							
2"	.113	Ring	Hot Galvanized	45292	1,000	168	2in x .113 Ring Shank Hot Galvanized 21° Plastic Collated Nails
2-1/4"	.148	Smooth	Bright	45285			105
			Hot Galvanized	45294	2-1/4in x .148 Smooth Shank Hot Galvanized 21° Plastic Collated Nails		
2-3/8"	.113	Smooth	Bright	45283	1,000	168	2-3/8in x .113 Smooth Shank Bright 21° Plastic Collated Nails
				45284			2-3/8in x .113 Ring Shank Bright 21° Plastic Collated Nails
				45356			2-3/8in x .148 Ring Shank Bright 21° Plastic Collated Nails
2-1/2"	.131	Smooth	Hot Galvanized	45296	1,000	168	2-3/8in x .113 Ring Shank Hot Galvanized 21° Plastic Collated Nails
				45286			2-1/2in x .131 Smooth Shank Bright 21° Plastic Collated Nails
				45357			2-1/2in x .148 Smooth Shank Bright 21° Plastic Collated Nails
3"	.120	Ring	Bright	45287	1,000	105	2-1/2in x .131 Smooth Shank Hot Galvanized 21° Plastic Collated Nails
				45288			2-1/2in x .131 Smooth Shank Hot Galvanized 21° Plastic Collated Nails
				45289			3in x .120 Smooth Shank Bright 21° Plastic Collated Nails
				45407			3in x .120 Ring Shank Bright 21° Plastic Collated Nails
3-1/4"	.131	Smooth	Hot Galvanized	45359	1,000	105	3in x .120 Ring Shank Bright 21° Plastic Collated Nails
				45299			3in x .131 Smooth Shank Bright 21° Plastic Collated Nails
				45290			3in x .120 Ring Shank Hot Galvanized 21° Plastic Collated Nails
3-1/2"	.131	Smooth	Bright	45290	1,000	105	3in x .131 Smooth Shank Hot Galvanized 21° Plastic Collated Nails
				45358			3in x .131 Ring Shank Hot Galvanized 21° Plastic Collated Nails
30°-34° PT Paper Collated Clipped Head Framing Nails							
2"	.120	Ring	Hot Galvanized	45313	1,000	168	2in x .120 Ring Shank Hot Galvanized 34° Paper Collated Nails
2-3/8"	.113	Smooth	Bright	45361			1,000
				45307	2-3/8in x .113 Ring Shank Bright 34° Paper Collated Nails		
3"	.120	Smooth	Bright	45309	1,000	168	2-3/8in x .113 Ring Shank Hot Galvanized 34° Paper Collated Nails
				45362			3in x .120 Smooth Shank Bright 34° Paper Collated Nails
				45310			3in x .120 Ring Shank Bright 34° Paper Collated Nails
				45365			3in x .131 Smooth Shank Bright 34° Paper Collated Nails
3-1/4"	.131	Smooth	Hot Galvanized	45315	1,000	168	3in x .120 Ring Shank Hot Galvanized 34° Paper Collated Nails
				45311			3-1/4in x .131 Smooth Shank Bright 34° Paper Collated Nails
34° PTJH Paper Collated Round Head Joist Nails							
1-1/2"	.131	Smooth	Bright	45366	1,000	168	1-1/2in x .131 Smooth Shank Bright High Carbon 34° Joist Collated Nails
				45317			1-1/2in x .148 Smooth Shank Bright 34° Joist Collated Nails
				45316			1-1/2in x .131 Smooth Shank Hot Galvanized 34° Joist Collated Nails
2-1/2"	.148	Smooth	Hot Galvanized	45319	1,000	105	1-1/2in x .148 Smooth Shank Hot Galvanized 34° Joist Collated Nails
				45367			2-1/2in x .148 Smooth Shank Bright High Carbon 34° Joist Collated Nails
				45368			2-1/2in x .162 Smooth Shank Bright High Carbon 34° Joist Collated Nails
2-1/2"	.148	Smooth	Hot Galvanized	45369	1,000	105	2-1/2in x .148 Smooth Shank Hot Galvanized 34° Joist Collated Nails

Fasteners Collated Nails











NOTES

1M Finish Fasteners

Electro Galvanized Ideal for both indoor & light outdoor use. Ensuring strength & protection with its added corrosion resistance coating.

Interchange Pro nails are made from premium-grade steel and engineered for superior performance and durability. Ideal for framing, finishing and specialty applications.

Fasteners
Finish Nails

<p>“DA” STYLE ANGLED NAILS</p>	<p>15^{GA} ANGLED NAIL</p> <p>Electro Galvanized</p> <p>Primary Applications Casing, Trim, Base Moulding and Cabinets</p>		
<p>STRAIGHT FINISH NAILS</p>	<p>16^{GA} STRAIGHT NAIL</p> <p>Electro Galvanized</p> <p>Primary Applications Casing, Finish, Trim, Moulding Baseboard and Cabinets</p>		
<p>20° ANGLED FINISH NAILS</p>	<p>16^{GA} ANGLED NAIL</p> <p>Electro Galvanized</p> <p>Primary Applications Casing, Finish, Trim, Moulding Baseboard and Cabinets</p>		
<p>BRAD NAILS</p>	<p>18^{GA} BRAD NAIL</p> <p>Electro Galvanized</p> <p>Primary Applications Casing, Finish, Trim, Corner Round Moulding Baseboard and Cabinets</p>		
<p>“L” STYLE NARROW NAILS</p>	<p>18^{GA} NARROW CROWN STAPLE</p> <p>Electro Galvanized</p> <p>Primary Applications Cabinets, Door Frames, Soffit, Picture Frames</p>		
<p>“N” STYLE MEDIUM NAILS</p>	<p>16^{GA} MEDIUM CROWN STAPLE</p> <p>Electro Galvanized</p> <p>Primary Applications Crates, Pallets, Sheathing and Cabinet Backs</p>		
<p>HEADLESS PIN NAILS</p>	<p>23^{GA} PIN NAIL</p> <p>Electro Galvanized</p> <p>Primary Applications Fine Trim Work</p>		

Get our flyer digitally!
Scan the QR code.




SOLD IN RECLOSABLE COMPACT BOXES

1M Finish Fasteners

Electro Galvanized Ideal for both indoor & light outdoor use. Ensuring strength & protection with its added corrosion resistance coating.

Length	Penny/Diameter	Shank	Coating	Point	Sort Name	Description
15 ga "DA" Style Angled Finish Nails						
1-1/2"	15G	N/A	Electro Galvanized	Chisel	45248	DA 1-1/2in 15ga Electro Galvanized Chisel Point
2"					45249	DA 2in 15ga Electro Galvanized Chisel Point
2-1/2"					45250	DA 2-1/2in 15ga Electro Galvanized Chisel Point
16 ga Straight Finish Nails						
1"	16G	N/A	Electro Galvanized	Chisel	45254	PB 1in 16ga Electro Galvanized Chisel Point
1-1/4"					45255	PB 1-1/4in 16ga Electro Galvanized Chisel Point
1-1/2"					45256	PB 1-1/2in 16ga Electro Galvanized Chisel Point
2"					45257	PB 2in 16ga Electro Galvanized Chisel Point
2-1/2"					45258	PB 2-1/2in 16ga Electro Galvanized Chisel Point
16 ga 20° Angled Finish Nails						
1-1/2"	16G	N/A	Electro Galvanized	Chisel	45261	PBA 1-1/2in 16ga Electro Galvanized Chisel Point
2"					45262	PBA 2in 16ga Electro Galvanized Chisel Point
2-1/2"					45263	PBA 2-1/2in 16ga Electro Galvanized Chisel Point
18 ga Brad Nails						
5/8"	18G	N/A	Electro Galvanized	Chisel	45264	PX 5/8in 18ga Electro Galvanized Chisel Point
1-1/4"					45265	PX 1-1/4in 18ga Electro Galvanized Chisel Point
1-1/2"					45266	PX 1-1/2in 18ga Electro Galvanized Chisel Point
2"					45267	PX 2in 18ga Electro Galvanized Chisel Point
18 ga "L" Style Narrow Crown Staples						
5/8"	18G	N/A	Electro Galvanized	Chisel	45271	1/4 crn 5/8in 18ga Electro Galvanized Chisel Point
7/8"					45272	1/4 crn 7/8in 18ga Electro Galvanized Chisel Point
1"					45273	1/4 crn 1in 18ga Electro Galvanized Chisel Point
1-1/4"					45274	1/4 crn 1-1/4in 18ga Electro Galvanized Chisel Point
1-1/2"					45275	1/4 crn 1-1/2in 18ga Electro Galvanized Chisel Point
16 ga "N" Style Medium Crown Staples						
1-1/2"	16G	N/A	Electro Galvanized	Chisel	45276	7/16crn 1-1/2in 16ga Electro Galvanized Chisel Point
2"					45278	7/16crn 2in 16ga Electro Galvanized Chisel Point
23 ga Headless Micro Pins						
1/2"	23G	N/A	Electro Galvanized	Chisel	45279	MP 1/2in 23ga Electro Galvanized Diamond Point
3/4"					45281	MP 3/4in 23ga Electro Galvanized Diamond Point
1"					45282	MP 1in 23ga Electro Galvanized Diamond Point

Fasteners
Finish Nails



NOTES



Decking & Construction Screws


Designed for outdoor durability, decking screws offer strong, secure fastening for wood, composite, or PVC decking. With corrosion-resistant coatings and self-drilling tips, they ensure clean finishes, reduced splitting, and long-lasting hold in all weather conditions.



Deep star drive recess to prevent cam-out on all screws

CD

COMPOSITE DECK SCREW



- ✓ #8, #9, 1-5/8" - 3" Screws
- ✓ Undercut Head prevents mushrooming
- ✓ Dual threads improve performance
- ✓ Type 17 tip eliminates the need to pre-drill
- ✓ T20 Bit Included
- ✓ Top 3 most popular colors for composite/PVC decks

TAN BROWN GREY

ACQ APPROVED



Use composite deck screws for easy installation and smooth finish.

Specially designed for use in composite, or PVC decking.

WD

WOOD DECK SCREW



- ✓ #8, #9 or #10, 1-1/4" - 4" Screws
- ✓ Reinforced head with nibs for better countersinking
- ✓ Dual thread design reduces splitting
- ✓ Sharp cutting tip specially designed for hardwood.
- ✓ T25 Bit Included
- ✓ Available in 3 colors

TAN RED GREEN

ACQ APPROVED



Use wood deck screws for a natural appearance and low maintenance.

Specially designed for use in wood decking and coated for pressure treated wood.

CS

CONSTRUCTION SCREW



- ✓ #8, #9 or #10, 1-1/4" - 4" Screws
- ✓ Flat head with nibs provides a smooth clean finish
- ✓ Designed for strength and durability
- ✓ Type 17 tip eliminates the need to pre-drill
- ✓ T25 Bit Included
- ✓ Available in Zinc

ZINC



Use construction screws for framing and general project needs.

Zinc coating for interior projects.

Decking & Construction Screws

Composite Deck Screws

Composite Head



Type T17 Point



Star Drive



Size	Length	Star Recess	Tip	1 lb Net (12/case)	5 lb Net (4/case)	25 lb Pail	1 lb Net (12/case)	5 lb Net (4/case)	25 lb Pail	1 lb Net (12/case)	5 lb Net (4/case)	25 lb Pail
				MFG CODE	MFG CODE	MFG CODE	MFG CODE	MFG CODE	MFG CODE	MFG CODE	MFG CODE	MFG CODE
Composite Deck Screws												
8	1 5/8"	T-20	T17	47242	47243	47244	47251	47252	47253	47260	47262	47263
9	2 1/2"	T-20	T17	47245	47246	47247	47254	47255	47256	47265	47268	47269
9	3"	T-20	T17	47248	47249	47250	47256	47257	47258	47270	47271	47272

Wood Deck Screws

Flat Head



Sharp Cutting Point



Star Drive



Size	Length	Star Recess	Tip	1 lb Net (12/case)	5 lb Net (4/case)	25 lb Pail	1 lb Net (12/case)	5 lb Net (4/case)	25 lb Pail	1 lb Net (12/case)	5 lb Net (4/case)	25 lb Pail
				MFG CODE	MFG CODE	MFG CODE	MFG CODE	MFG CODE	MFG CODE	MFG CODE	MFG CODE	MFG CODE
Wood Deck Screws												
8	1 1/4"	T-25	SC	47319	47321	47322	47294	47295	47296	47273	47274	47275
8	1 5/8"	T-25	SC	47324	47325	47326	47297	47298	47299	47276	47277	47278
9	2"	T-25	SC	47327	47328	47329	47301	47303	47304	47279	47280	47281
9	2 1/2"	T-25	SC	47328	47331	47332	47305	47306	47307	47282	47283	47284
9	3"	T-25	SC	47330	47334	47335	47308	47310	47311	47285	47286	47287
10	3 1/2"	T-25	SC	47333	47334	47335	47305	47314	47315	47288	47289	47290
10	4"	T-25	SC	47339	47340	47341	47316	47317	47318	47291	47292	47293

Construction Screws

Flat Head



Type T17 Point



Star Drive



Size	Length	Star Recess	Tip	1 lb Net (12/case)	5 lb Net (4/case)	25 lb Pail
				MFG CODE	MFG CODE	MFG CODE
Construction Screws						
8	1 1/4"	T-25	T17	47342	47343	47344
8	1 5/8"	T-25	T17	47345	47346	47347
9	2"	T-25	T17	47348	47349	47350
9	2 1/2"	T-25	T17	47351	47352	47353
9	3"	T-25	T17	47354	47355	47356
10	3 1/2"	T-25	T17	47357	47358	47359
10	4"	T-25	T17	47360	47361	47362

Color Legend



Fasteners Decking Screws



NOTES


Drywall & Metal Framing Screws

Our premium drywall and framing screws are engineered to provide superior performance for all your construction and renovation projects. If you're installing drywall or framing a structure, our screws offer strength, reliability, and ease of use.

Phosphate Ideal for indoor projects. Provides a moderate corrosion resistance – best suited for indoor applications with minimal moisture exposure. Has a dull matte black finish.

Zinc Ideal for indoor projects. Provides double the moisture protection vs phosphate. Has a shiny silver or yellow finish.

Fasteners Drywall Screws

<p>DRYWALL TO WOOD</p> <p>Bugle Head  Sharp Point </p>	<p>Phosphate / Zinc</p> <p>Primary Applications Drywall to Wood</p>	 	
<p>DRYWALL TO LIGHT GAUGE METAL</p> <p>Bugle Head  Sharp Point </p>	<p>Phosphate</p> <p>Primary Applications Drywall to Light Metal - 25 gauge to 20 gauge</p>	 	
<p>DRYWALL TO MEDIUM GAUGE METAL</p> <p>Bugle Head  SD #2 </p>	<p>Zinc</p> <p>Primary Applications Drywall to Metal - 20 gauge to 14 gauge Head Board, Exterior Sleathing</p>	 	
<p>LATH TO METAL</p> <p>Mod Truss Head  SD #2 </p>	<p>Zinc</p> <p>Primary Applications Lath to Metal - 20 gauge to 14 gauge</p>	 	
<p>METAL TO LIGHT GAUGE METAL</p> <p>Pan Head  Mod Truss Head  Sharp Point </p>	<p>Phosphate / Zinc</p> <p>Primary Applications Lath to Light Metal - 25 gauge to 20 gauge</p>	 	
<p>METAL TO MEDIUM GAUGE METAL</p> <p>Pan Head  Mod Truss Head  Hex Washer Head  SD #2  SD #3 </p>	<p>Zinc</p> <p>Primary Applications Metal to Thick Metal - 20 gauge to 14 gauge</p>	 	
<p>LATH TO WOOD</p> <p>Mod Truss Head  Sharp Point </p>	<p>Zinc</p> <p>Primary Applications Lath to Wood</p>	 	

Get our flyer digitally!
Scan the QR code.





CONSTRUCTION SUPPLIES



INTERCHANGE PRO

HEAVY DUTY FLOOR PROTECTION 38"

LIQUID RESISTANT RECYCLABLE

MADE IN THE USA

INTERCHANGE PRO

HEAVY DUTY FLOOR PROTECTION 38" X 100'

LIQUID RESISTANT RECYCLABLE

MADE IN THE USA

INTERCHANGE PRO

RUBBER WATER HOSE MANGUERA DE AGUA DE GOMA

Professional Grade • Heavy Performance

50'

5/8"

800'

3/4"

100'

Water Hose

Durable and reliable, our water hoses are built to withstand tough construction site conditions. Our rubber and PVC water hoses are heavy duty, kink resistant, abrasion resistant and made to handle extreme weather conditions - yet they are lightweight and portable. Ideal for dust control, equipment cleaning and other general water transfer on the job.

**Superior
Fittings**



RUBBER WATER HOSE

- ✓ 3/4" Solid brass fittings
- ✓ 20% Lighter than standard rubber hose
- ✓ Suitable for use with hot water up to 180°F
- ✓ 500 PSI minimum burst pressure
- ✓ Ozone Resistant / Abrasion Resistant / Kink Resistant
- ✓ Bend Restrictor for added protection
- ✓ 3:1 Safety Factor




4-Finger Grip Bend Protector

3/4" Solid Brass Nozzle

3/4" Solid Brass Coupling

Type	Diameter	Length	Model	Manf	Diameter	Length	Model	Manf
Rubber Water Hose	5/8"	50'	RBW5850	84782	3/4"	50'	RBW3450	84785
		75'	RBW5875	84783		100'	RBW34100	84786
		100'	RBW58100	84784				

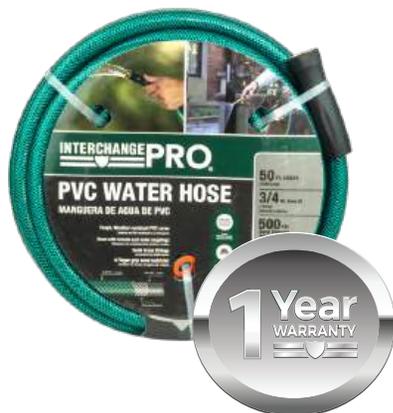

PVC WATER HOSE

- ✓ 3/4" Brass fittings
- ✓ Tough, weather-resistant PVC cover
- ✓ High-strength polyester-braided radial reinforcement
- ✓ 500 PSI minimum burst pressure
- ✓ Kink-free 3-ply construction
- ✓ 4-finger grip bend restrictor
- ✓ Lightweight and portable



Reinforced Bend Protectors

3/4" Brass Coupling

3/4" Brass Nozzle

Type	Diameter	Length	Model	Manf	Diameter	Length	Model	Manf
PVC Water Hose	5/8"	50'	PVCW5850	84565	3/4"	50'	PVCW3450	84568
		75'	PVCW5875	84566		100'	PVCW34100	84569
		100'	PVCW58100	84567				



Construction Water Hose

Heavy Duty Floor Protection

Interchange PRO now carries heavy duty floor protection.
The highest quality in the industry!

FEATURES:

- ✓ 40MIL thick
- ✓ 38" X 100' designed for a 2" overlap at the seam
- ✓ Liquid Resistant
- ✓ Recyclable
- ✓ Individually wrapped
- ✓ 16 Rolls to a pallet

38" x 100'

Part No. 99623
Item No. 438820



Roofing Underlayment

Synthetic roof underlayment is durable, tear-resistant, and can endure UV and moisture exposure. It's built to handle foot traffic during installation and remains effective even after rough handling.



4' x 250' Synthetic

Part No. 45389 Item No. 475567



Repels Moisture: Crafted from durable plastic, it effectively repels water to prevent moisture infiltration and resists mold growth, offering superior protection compared to felt.

Lightweight: Up to four times lighter than felt, making it easier to handle.

Fast installation: Fewer rolls needed compared to felt, reducing the time spent on the job.

Safety: Slip-resistant surfaces and clear overlap guides improve worker safety and installation accuracy.



Standards / Approvals:

ESR 5197 • ASTM D8257 • ASTM D226 • ASTM E108 Class A • Florida FBC#FL 42105 • AC188 • CAN/CSA A123.3

Stucco Tape

This tape features a durable, moisture-resistant polyethylene (PE) film backing with a synthetic rubber-based pressure-sensitive adhesive, providing strong adhesion to a variety of surfaces. Designed for high conformability without excessive stretching, the stiffer backing enhances ease of handling in certain applications.



Polyethylene Film Tape

Part No. 40002 Item No. 476594



Applications:

Patching, sealing, bundling & wrapping.

Also used for splicing and surface protection, vapor barrier seaming, wire hold down, multi-purpose convention applications, short term masking for EIFS and holding poly sheeting barrier film.

Product Details

Width	2"
Length	60YD
Backing	Polyethylene (PE) Film
Adhesive	Synthetic Rubber
Adhesion to Steel	75 (20.5 N/25mm)
Tensile Strength	23 (100.7 N/25mm)
Elongation	75
Total Thickness	7.0 (0.178mm)
Application Temperature Range	+45° to +150°F (+7°C ~ +65°C)
Operating Temperature Range	+20°F ~ +200°F (-7°C ~ +93°C)

Annealed Black Tie Wire

Our tie wire is a durable, flexible, and easy-to-use solution for securing rebar and other materials. Made from high-quality, annealed steel, it provides exceptional strength while remaining pliable for quick and efficient tying. Ideal for concrete reinforcement, fencing, and general construction applications. Designed to fit standard dispensing reels for additional convenience.

Construction Tie Wire

<p>16 Gauge 3.5 lb roll</p> <p>Part No. 84861</p> <p>Primary Applications Securing rebar prior to concrete pour. Bundle pipes, rods, lumber.</p>   <p>Round Hole </p>	<p>16 Gauge 3.5 lb roll</p> <p>Part No. 84863</p> <p>Primary Applications Securing rebar prior to concrete pour. Bundle pipes, rods, lumber.</p>   <p>Square Hole </p>
<p>16.5 Gauge 3.5 lb roll</p> <p>Part No. 84862</p> <p>Primary Applications Securing rebar prior to concrete pour. Bundle pipes, rods, lumber.</p>   <p>Round Hole </p>	<p>16.5 Gauge 3.5 lb roll</p> <p>Part No. 84864</p> <p>Primary Applications Securing rebar prior to concrete pour. Bundle pipes, rods, lumber.</p>   <p>Square Hole </p>

Box/MOQ	Diameter	Coating	Weight	Part Number	Sort Name	Hole Style	Description
20 Rolls	16G	Black	3.5 lbs	84861	TW16B-3.5RH	Round	16ga Round Hole Annealed Black 3.5lb/rl
20 Rolls	16.5G	Black	3.5 lbs	84862	TW16.5B-3.5RH	Round	16.5ga Round Hole Annealed Black 3.5lb/rl
20 Rolls	16G	Black	3.5 lbs	84863	TW16B-3.5SH	Square	16ga Square Hole Annealed Black 3.5lb/rl
20 Rolls	16.5G	Black	3.5 lbs	84864	TW16.5B-3.5SH	Square	16.5ga Square Hole Annealed Black 3.5lb/rl



NOTES





DISPLAY & POP

2' Gondolas & Accessories

The ultimate display solution for any product and any space. Versatile 2' racks will cover all your display needs with ease. Modular "Easy Add" sections allow you to customize and expand to any width and height.

Get our flyer digitally!
Scan the QR code.



Features:

- Peg board on front & back panel
- Modular 2' design
- Add multiple panels for desired height - 52", 76" or 100"

Kit Includes: Two Peg Board Panels, 3 Shelves, Sturdy Base, Printed Header, Easy Shipping

52" Tall



76" Tall



Add Extra Panels. Up to 8-ft Tall!

2' Wide

(Height does not include header. Black finish. Item # 98841 & 98845)

Gondola Accessories



Back Panel
Item# 98842
2' x 2'



Shelves
Item# 98843
23" x 16"



2 Gondola Connectors
Item# 98844



6-1/4" X 3.5" Tool Display Cards
Item# PRO-TOOLCARDS



Tool Holder (5 pk)
Item# TH332580BLACK



Channel Card Holder
Item# 448-101
23" x 16"



4" X 2.625" Fastener Display Cards

Poly Air Hose 1/4 Pallet Display

This lightweight, durable cardboard display features three sturdy shelves and a space-saving footprint—perfect for any retail floor. Easy to set up and move, it holds 24 to 60 Poly Air Hoses, making restocking and merchandising quick and efficient.




Sort Name. FG00176 Item No. 444971



POLY AIR HOSE			
Diameter	Length	Model	Manf
1/4"	25'	PU1425-FF-BLU	84556
	50'	PU1450-FF-BLU	84557
	100'	PU14100-FF-BLU	84558

See pg 10 for more information on our Poly Air Hoses



NOTES




Display & Pop Poly Air Hose

Tool Part Kits

Tool	Kit Name	Description
NSR83-21PROFRAMER	NSR8321PROFRAMERK0	BUMPER
	NSR8321PROFRAMERK1	ORINGS
	NSR8321PROFRAMERK2	PISTON/DRIVER
	NSR8321PROFRAMERK3	HEAD CAP ASSY
	NSR8321PROFRAMERK4	TRIGGER KIT
	NSR8321PROFRAMERK5	MAG ASSY
	NSR8321PROFRAMERK6	GUIDE BODY ASSY
	NSR8321PROFRAMERK7	SAFETY ASSY
	NSR8321PROFRAMERK8	FEEDER KIT
NSR83-21PRO	NSR8321PROK1	ORING KIT
	NSR8321PROK2	PISTON/DRIVER
	NSR8321PROK3	HEAD CAP ASSY
	NSR8321PROK4	TRIGGER KIT
	NSR8321PROK5	MAG ASSY
	NSR8321PROK6	GUIDE BODY
	NSR8321PROK7	SAFETY ASSY
	NSR8321PROK8	FEEDER KIT
	NSR8321PROK9	BUMPER
NSC83-28PRO	NSC8328PROK1	ORINGS
	NSC8328PROK2	PISTON/DRIVER ASSY
	NSC8328PROK3	HEAD CAP ASSY
	NSC8328PROK4	TRIGGER KIT
	NSC8328PROK5	MAG ASSY
	NSC8328PROK6	GUIDE BODY
	NSC8328PROK7	SAFETY ASSY
	NSC8328PROK8	FEEDER KIT
	NSC8328PROK9	BUMPER KIT
CN565-0PRO	CN5650PROK1	ORINGS
	CN5650PROK2	PISTON/DRVR ASSY
	CN5650PROK3	HEAD CAP ASSY
	CN5650PROK5	MAG ASSY
	CN5650PROK6	GUIDE BODY ASSY
	CN5650PROK7	SAFETY ASSY
	CN5650PROK9	BUMPER
	CN5650PROK4	TRIGGER ASSY
	CN5650PROK8	FEEDER ASSY
CN565-15PRO	CN56515PROK1	ORINGS
	CN56515PROK2	PISTON/DRVR ASSY
	CN56515PROK3	HEAD CAP ASSY
	CN56515PROK4	TRIGGER ASSY
	CN56515PROK5	MAG ASSY
	CN56515PROK6	GUIDE BODY ASSY
	CN56515PROK7	AFETY ASSY
	CN56515PROK8	FEEDER ASSY
	CN56515PROK9	BUMPER

Tool	Kit Name	Description
NSJH38-34PRO	NSJH38-34PROK1	ORINGS
	NSJH38-34PROK2	PISTON/DRVR ASSY
	NSJH38-34PROK3	HEAD CAP ASSY
	NSJH38-34PROK4	TRIGGER ASSY
	NSJH38-34PROK5	MAG ASSY
	NSJH38-34PROK6	GUIDE BODY ASSY
	NSJH38-34PROK7	SAFETY ASSY
	NSJH38-34PROK8	FEEDER ASSY
	NSJH38-34PROK9	BUMPER
NSJH64-34PRO	NSJH64-34PROK1	ORINGS
	NSJH64-34PROK2	PISTON/DRVR ASSY
	NSJH64-34PROK3	HEAD CAP ASSY
	NSJH64-34PROK4	TRIGGER ASSY
	NSJH64-34PROK5	MAG ASSY
	NSJH64-34PROK6	GUIDE BODY ASSY
	NSJH64-34PROK7	SAFETY ASSY
	NSJH64-34PROK8	FEEDER ASSY
	NSJH64-34PROK9	BUMPER
SP4016PRO	SP4016-4PROK5	MAG ASSY
	SP4016-PROK1	ORINGS
	SP4016-PROK2	PISTON/DRVR ASSY
	SP4016-PROK3	HEAD CAP ASSY
	SP4016-PROK6	GUIDE BODY ASSY
	SP4016-PROK7	SAFETY ASSY
	SP4016-PROK8	FEEDER ASSY
	SP4016-PROK9	BUMPER
	SP4016PROK4	TRIGGER ASSY
SN5016PRO	SN5016-4PROK5	MAG ASSY
	SN5016-PROK1	ORINGS
	SN5016-PROK2	PISTON/DRVR ASSY
	SN5016-PROK3	HEAD CAP ASSY
	SN5016-PROK6	GUIDE BODY ASSY
	SN5016-PROK7	SAFETY ASSY
	SN5016-PROK8	FEEDER ASSY
	SN5016-PROK9	BUMPER
	SN5016PROK4	TRIGGER ASSY
CRN4500PRO	BULK PARTS	TOCK
	CRN4500PROK1	ORINGS
	CRN4500PROK2	PISTON/DRIVER
	CRN4500PROK3	HEAD CAP ASSY
	CRN4500PROK4	TRIGGER KIT
	CRN4500PROK5	MAG ASSY
	CRN4500PROK6	GUIDE BODY ASSY
	CRN4500PROK7	SAFETY ASSY
	CRN4500PROK8	FEEDER KIT
CRN4500PROK9	BUMPER	



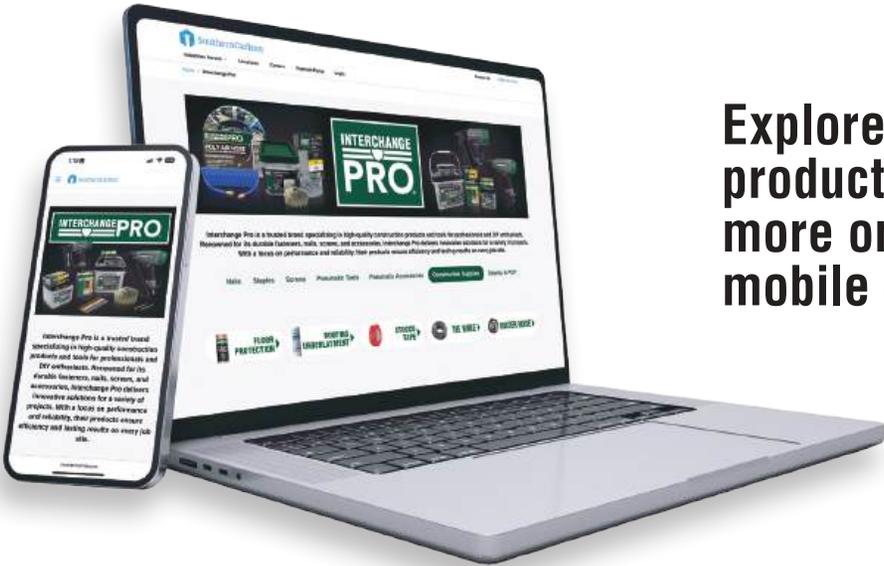

Explore our full line of products, sell sheets and more on your desktop or mobile devices!

Get our flyers & more digitally!
Scan the QR code.



www.Interchange-Pro.com 1-800-745-6735





**Tools
Fasteners
Accessories
Construction Supplies**

www.Interchange-Pro.com



To order, contact your local sales representative or call please call 1-800-745-6735.

